

SMART KING PRO



Main Feature


- Build-in Automatic Voltage Regulator(AVR)**
Attached with AVR stabilize fluctuate voltage problem
- Simple & Clear LCD display**
Clear & easy reading LCD indicator
- Auto Self-diagnose and alarm warning**
Self-test diagnose and emergency alarm warning
- High quality pure sine wave output**
Pure sine wave safety output for load
- Power saving design prolongs model usage age**
Green mode energy saving design

- Power protection on critical device**
Surge, short circuit and overload protection to ensure power safety
- Battery easy-swappable replacement design**
Simple and easy battery replacement process

- UPSMON PRO and APP**
Instant UPS status is available to monitor through remote control system



Standard Outlet

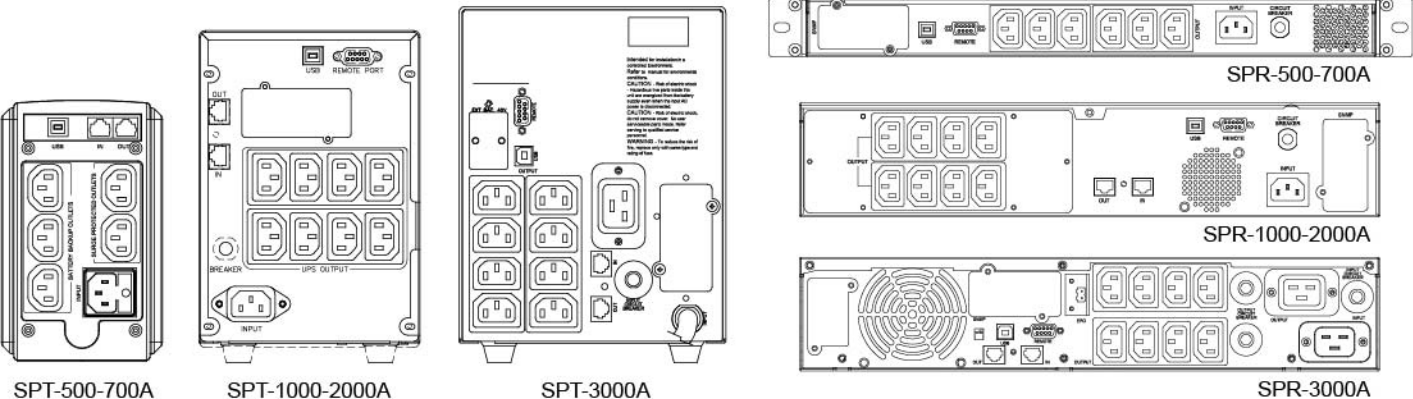

Line Interactive UPS

Specification

Model		SPT-500A SPR-500A	SPT-700A SPR-700A	SPT-1000A SPR-1000A	SPT-1500A SPR-1500A	SPT-2000A SPR-2000A	SPT-3000A SPR-3000A
Configuration							
Capacity (VA)	500 VA		700 VA	1000 VA	1500 VA	2000 VA	3000 VA
Capacity (Watts)	400 W		560 W	800 W	1200 W	1600 W	2400 W
Form	Tower Type : SPT model						
	Rack and Tower Type : SPR model						
Input							
Voltage	100 / 110 / 120 VAC or 220 / 230 / 240 VAC						220/230/240 VAC
Input Voltage Range	75 - 150 or 165 - 300 VAC						165 - 300 VAC
Input Frequency Range	50 Hz / 60 Hz ±10% (Auto Sensing)						
Output							
Waveform	Pure Sine Wave						
Voltage	100 / 110 / 120 VAC or 220 / 230 / 240 VAC						220/230/240 VAC
Frequency	50 Hz / 60 Hz ±0.5%						
Transfer Time	2-4 ms (Typical)						
Protection							
Full Protection	Overload, Surge, Short Circuit						
Tele Communication	RJ11 / RJ45 (Except SPR-500A/700A)						
Battery							
Type Quantity (Tower)	12V 7.2Ah x1	12V 9Ah x1	12V 7Ah x2	12V 7.2Ah x2	12V 9Ah x2	12V 7Ah x4	
Type Quantity (Rack)	6V 7Ah x2	6V 9Ah x2	12V 7Ah x2	12V 7.2Ah x2	12V 9Ah x2	12V 7Ah x4	
Sealed, Maintenance Free	Yes						
Typical Recharge Time	3-4 hr to 90%						
Management & Communication							
Indicator (Tower)	LED Panel		LCD Panel				
Indicator (Rack)	LCD Panel		LCD Panel (Auto rotation)				
Communication Port (Tower)	USB B type		USB B type, RS232 & SNMP SLOT				
Communication Port (Rack)	USB B type, RS232 & SNMP SLOT						
Physical							
SPT	Dimensions (WxDxH)(mm)	102 x 326 x 165		140 x 380 x 210			170 x 450 x 226
	Weight (kgs)	6.2	6.8	14	15	17.5	25.4
	Shipping Dimensions (mm)	196 x 410 x 263		258 x 487 x 326			298 x 356 x 553
	Shipping Weight (kgs)	7.2	7.8	15.4	16.4	18.9	28.2
SPR	Dimensions (WxDxH)(mm)	428 x 335 x 44		428 x 431 x 84			428 x 562 x 84
	Weight (kgs)	8.9	9.1	14.4	16.7	18.8	26.5
	Shipping Dimensions (mm)	563 x 473 x 168		577 x 590 x 211			577 x 720 x 211
	Shipping Weight (kgs)	10.9	11.1	18.2	20.4	22.6	30.5
Alarm							
Overload / Fault	Continuous Beeping						
Battery Mode	Beep every 4 seconds						
Low Battery	Beep every 1 second						
Environment							
Operating Humidity	0-90 % RH at 0-40°C (Non-condensing)						
Audible Noise	Less than 40 dB						

* Specifications are subject to change without further notice.
* Specifications are for reference, please refer to information based on real product.