



Leadership is in its blood



## ARK 958 GATE VALVE RESILIENT SEATED

- Pressure Class** → PN10-PN16-PN25
- Relevant Standards** → TS EN 558+A1 series14-series15, DIN3202 F4-F5, TS EN 1171, TS EN 1092-2
- Accessory** → Electric actuator, gearbox, buckle kit (Optional)
- Paint** → WRAS approved blue electrostatic epoxy powder paint (RAL 5005)




Part No	Part Name	Material
1	Body	GGG40 - GGG50
2	Cover	GGG40 - GGG50
3	Handwheel	GG25
4	Slider guide	P.O.M
5	Slide	Epdm Coated GGG40
6	Slide Nut	Brass
7	Shaft	SS 420-SS 316L
8	Shaft Centering Bed	Bronze
9	Cover Nut	Brass

- All connection elements (bolts, nuts, washers) are used as galvanized with 8.8 quality (A2-70 quality stainless steel is used optionally).
- All sealing elements (o-ring, gasket) are EPDM.

## ARK 958 GATE VALVE

**F4** →

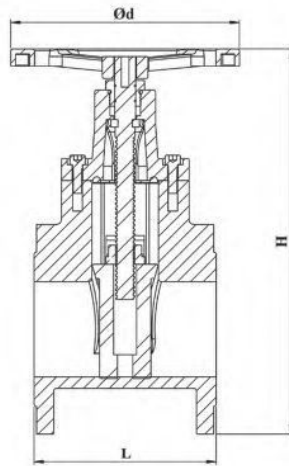

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
L	150	170	180	190	200	210	230	250	270	290	310	330	350	390
H	200	230	280	310	325	380	510	630	630	700	810	1035	1150	1300
Ød	180	180	220	220	220	275	315	500	500	500	500	615	615	615

\* Length measurements are given in " mm"