

②


Placi gips carton rezist. la umedit.si ignifug
pelicula anticondensat--1 strat
termoizolant vata minerala--100mm
pelicula anticondensat--1 strat
Grinzi de lemn 60x140
Placi gips carton rezist. la umedit.si ignifug
discoare cu amestec uscat "knauff", Chituire - "Eurofin"-1mm grunduire,emulsie apoasa

Consum tavan--6,0m²

Specificatia elementelor de metal -balustrade 1-1,scara1

Marca poz.	Marcarea	Denumirea	Cant.	Masa unit. kg.	Nota
1	Otel de Inox	ø60x3 m.l.	8,0		
2	— 77 —	ø20x2 m.l.	19,0		
3	— 77 —	ø40x3 l=1000 buc.	18		
4	Otel de Inox	Detaliu de fixare, buc.	18		
	Scara 1	placi ceramice ----m ²	14		
		plasa vr ----kg	175		
	Placare soclu	piatra artificiala m ²	11.5		

Scara 1

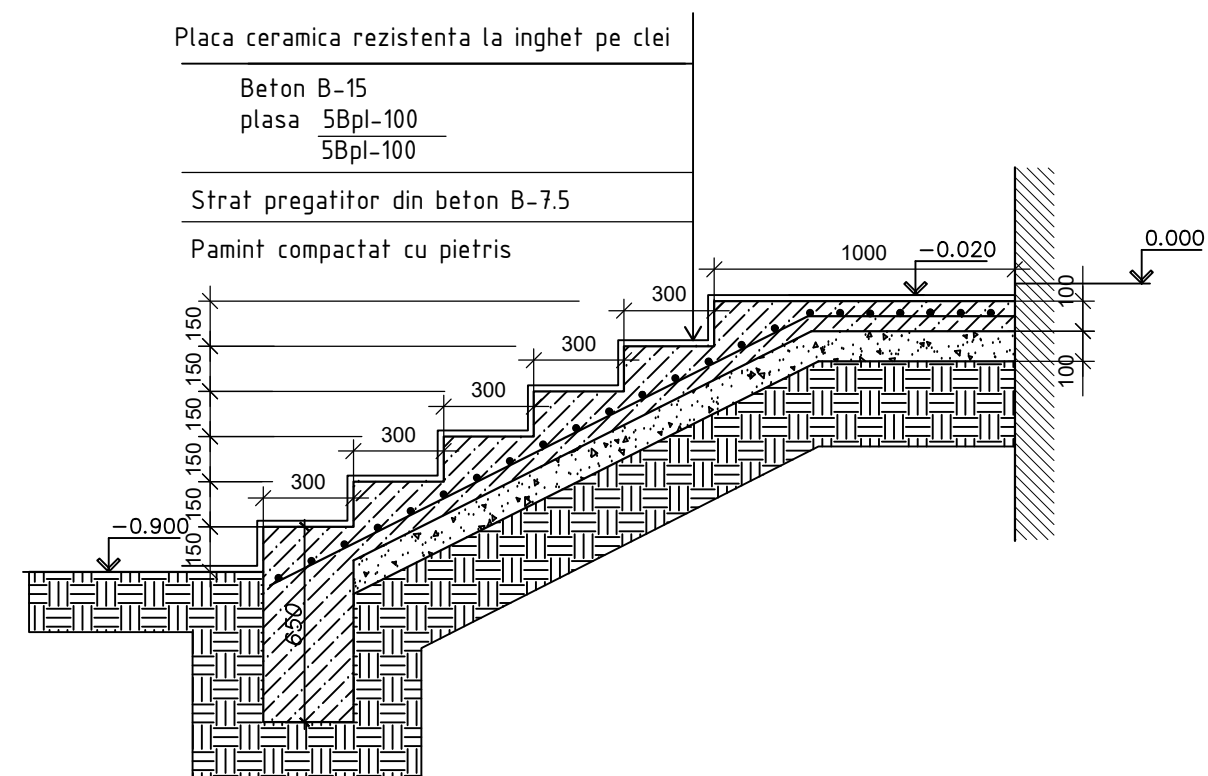

Nota:

1. Foaia data se studiaza impreuna cu f.6.
2. Balustradele vor fi confectionate din inox sudat cu argon doar de catre producatori specializati in domeniu, conform catogul de produse si accesorii proprii.

						11/18-SAC		
						Anexa (lit."A") la cladirea blocului alimentar al L.T."Alexandr Puskin" str.Bulgara nr.122, mun.Balti		
Sch.	Cant.	Foia	N doc.	Semn.	Data			
						Anexa	Etapa	Foia
							PE	8
ASP		Lungu M.			12.2018	Volume scara,balustrada,sectiune	"Diarse-Tehnic" S.R.L. mun. Chisinau	
Executor		Cebotari V.						