

Data sheet

Drying Oven SLW 32



The photo above is for reference only, may show additional options not included in standard equipment.
The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.


TECHNICAL DATA	
air convection	forced
chamber capacity [l] /1/	32
working capacity [l]	32
controller	microprocessor with external LCD graphic display
TEMPERATURE	
temperature range [°C]	+5°C above ambient temperature ... +300°C
temperature resolution every ... [°C]	0,1
over temperature protection	class 2.0 to DIN 12880 / class 3.1 (option)
temperature fluctuation at 150°C [°C]	±0,2
temperature variation at 150°C [°C]	±2,3
CHAMBER	
door type	solid
interior	
STD	acid-proof stainless steel to DIN 1.4301
INOX/G	acid-proof stainless steel to DIN 1.4301
housing	
STD	powder coated sheet
INOX/G	stainless steel linen finish

overall dims [mm] /2/

width A	590
height B	630
depth C	520

internal dims [mm]

width D	400
height E	320
depth F	250

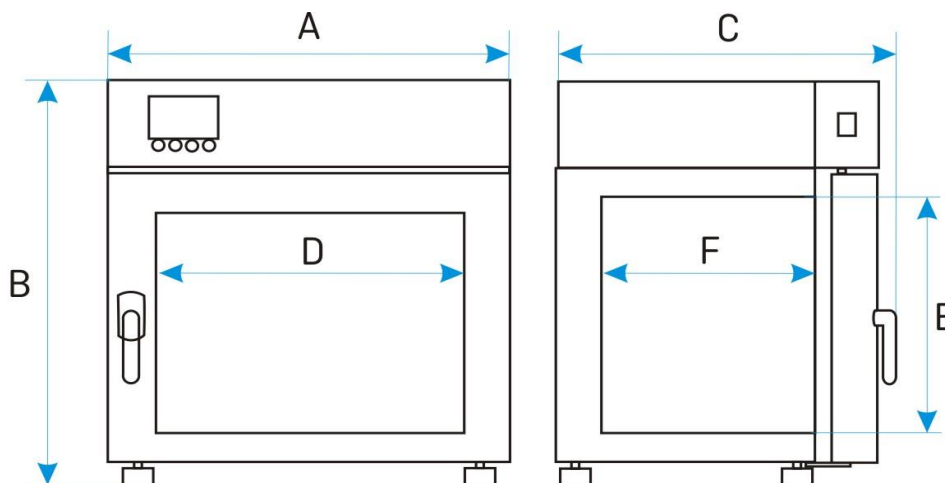

shelves (standard / max)	1 / 3
max shelf workload [kg] /5/	10
- reinforced shelf version (PW) /3/	-
max unit workload [kg]	30
- reinforced unit version (W) /4/	-
weight [kg]	35

ELECTRICAL PARAMETERS

voltage*	230V 50Hz
nominal power [W]	1200
warranty	24 months
manufacturer	POL-EKO-APARATURA

all the above technical data refer to standard units (without optional accessories)

* - 230V 60Hz, 115V 60Hz also available

1 - working capacity of chamber can be smaller

2 - depth doesn't include 50 mm of power cable

3 - reinforced shelf

4 - reinforced version

5 - on uniformly loaded surface

OPTIONS AND ACCESSORIES

