

W3G300-RQ28-56

EC axial fan

with brushless DC motor
Automotive



ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.ebmpapst.com
www.ebmpapst.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Type	W3G300-RQ28-56	
Motor	M3G074-CF	
Nominal voltage	VDC	27.5
Nominal voltage range	VDC	16 .. 32
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	3380
Power consumption	W	320
Current draw	A	11.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	85

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


Weight	2.5 kg
Size	300 mm
Motor size	74
Impeller material	PA6 plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Balancing grade according to DIN ISO 21940-11	G 10
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H2
Max. permitted ambient temp. for motor (transport/storage)	+70 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancy	25,000 h (typical)
Technical features	- Load dump protection - Motor current limitation - Soft start - Control input 0-5 VDC - Standstill on cable break - Overvoltage detection - Thermal overload protection for electronics - Line undervoltage detection - Reverse polarity protection
EMC regulations	According to ECE R10 Rev. 3
Electrical hookup	Connector with cable; Standby current less than 500 µA
With cable	Lateral
Protection class assignment	III; Requires supply with safety extra-low voltage SELV. This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection. If there is a PE connection point on the housing, it must not be visible after installation.
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Regulation (EC) No. 327/2011 does not apply, as use only in means of transport for transporting persons or goods.
Approval	EAC; E1
Comment	Type approval number – 036433

EC axial fan

with brushless DC motor

Automotive

Product drawing

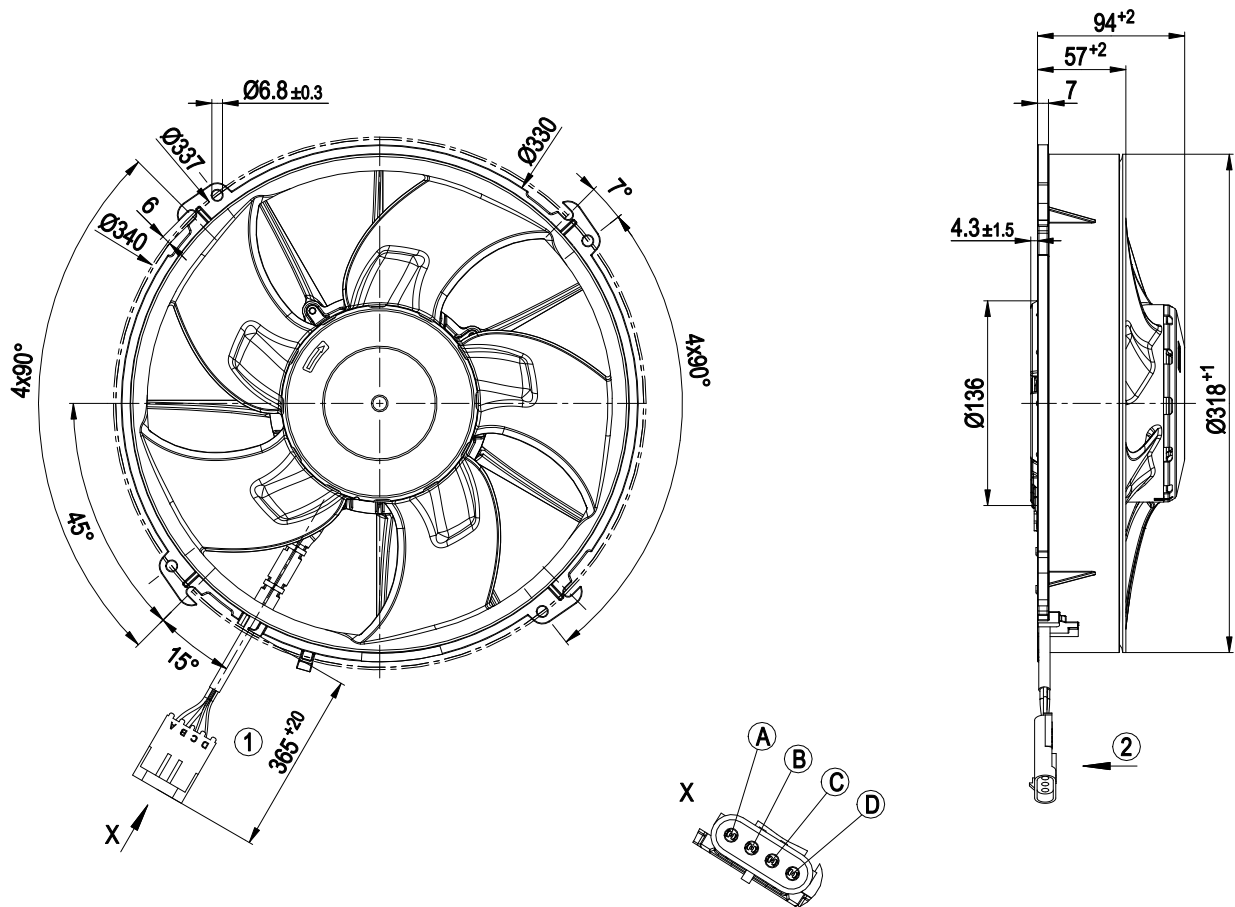


1	Cable, 2x Raychem Spec. 44 AWG20, 2x Raychem Spec. 44 AWG14
	4-pole connector housing Aptiv 12010974, 2x plug pin Aptiv 12089040, 2x plug pin Aptiv 12124582, 2x seal Aptiv 15324982, 2x seal Aptiv 15324983
A	+ UB
B	PWM/LIN
C	CGND
D	GND
	4-pole mating connector Aptiv 12015797, 2x plug contact Aptiv 120 89188, 2x plug contact Aptiv 121 24580, 2x seal Aptiv 153 24982, 2x seal Aptiv 153 24983
2	Airflow direction "V"

EC axial fan

with brushless DC motor

Automotive

Connection diagram

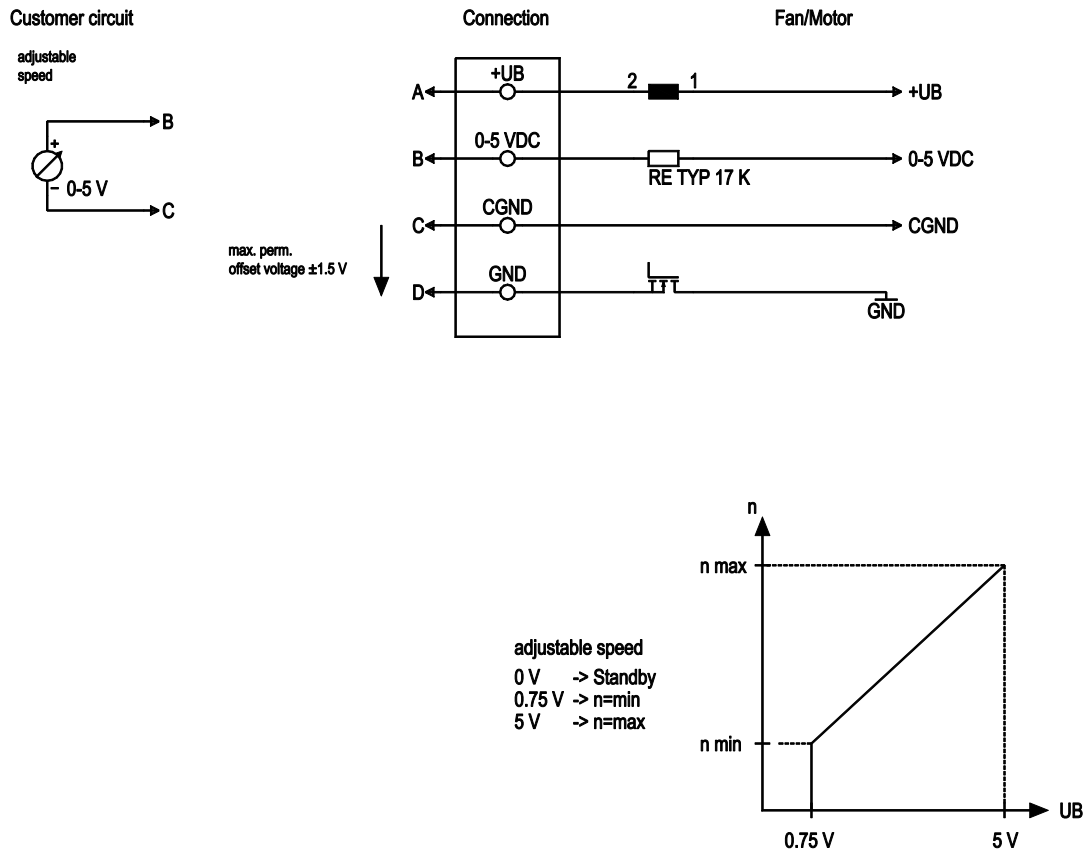


No.	Conn.	Designation	Function/assignment
	A	+UB	Power supply
	B	0-5 VDC	Analog voltage control input 0-5 V
	C	CGND	Control input reference ground, permissible offset ± 1.5 V
	D	GND	Power supply GND, reference ground

EC axial fan

with brushless DC motor
Automotive

Curves: Air performance

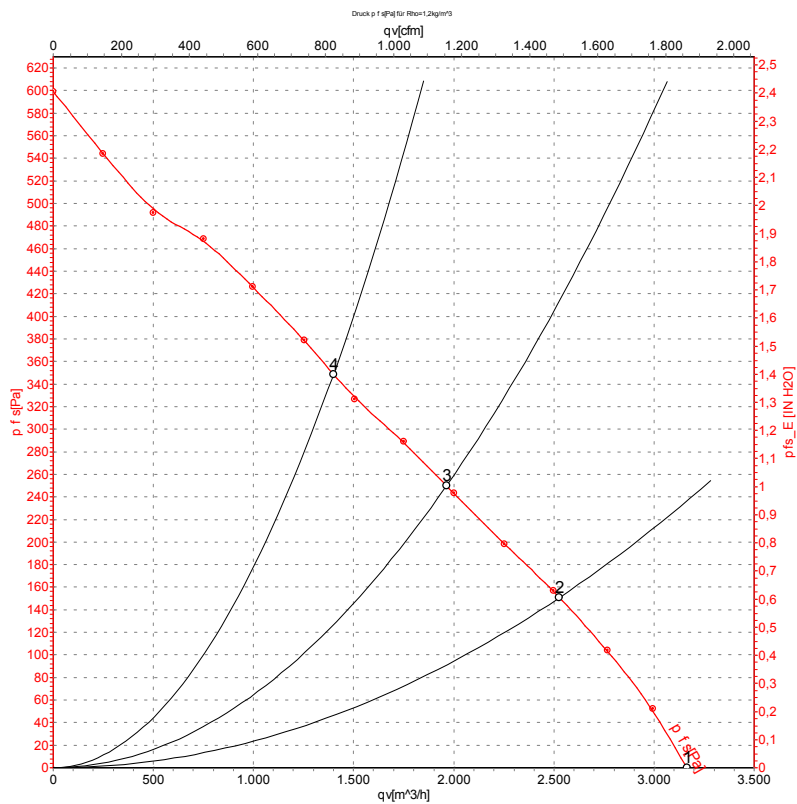

Measurement: LU-122953-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	q _v	p _{ts}	q _v	p _{ts}
	V	min ⁻¹	W	A	dB(A)	m ³ /h	Pa	cfm	in. wg
1	27.5	3380	320	11.50	76	3165	0	1860	0.00
2	27.5	3380	334	12.14	77	2525	150	1485	0.60
3	27.5	3380	344	12.46	79	1965	250	1155	1.00
4	27.5	3370	375	13.63	81	1400	350	825	1.41

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · q_v = Air flow · p_{ts} = Pressure increase

