

**THE NETHERLANDS**
(N E D E R L A N D)**COMMUNICATION**Concerning ⁽¹⁾:

- approval granted
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~


of a type of pneumatic tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-0270925**Extension number: 00**

1. Manufacturer's name or trade mark(s) on the tyre type : UNIGRIP
2. Tyre type designation by the manufacturer : ROAD TURBO
3. Manufacturer's name and address : Shandong New Continent Tire Co., Ltd.
Lushan Project Area ,Economic Development Zone ,
Yishui,Shandong,China.276400
4. If applicable, name and address of the manufacturer's representative : not applicable
5. Summarised description
 - 5.1. Tyre size designation : 205/55R16
 - 5.2. Category of use : normal/~~snow/special use/temporary use~~ ⁽¹⁾
 - 5.3. Structure : ~~diagonal/bias belted~~/radial/~~run flat tyre~~ ⁽¹⁾
 - 5.4. Speed category symbol : W
 - 5.5. Load-capacity index : 94

6. Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : TÜV Rheinland Kraftfahrt GmbH
Technologiezentrum Verkehrssicherheit
Typprüfstelle Fahrzeuge/Fahrzeugteile
Am Grauen Stein
D-51105 Köln (Poll)
7. Date of report issued by that service : May 16, 2014
8. Number of report issued by that service : 86-R30-1253/13
9. Reason(s) of extension (if applicable) : N.A.
10. Any remarks : ---
11. Approval : granted/~~extended/refused/withdrawn~~⁽¹⁾
12. Place : Zoetermeer
13. Date : 16-JUN-2014
14. Signature :
15. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
- The test report as mentioned in item 8.

⁽¹⁾ Strike out what does not apply.

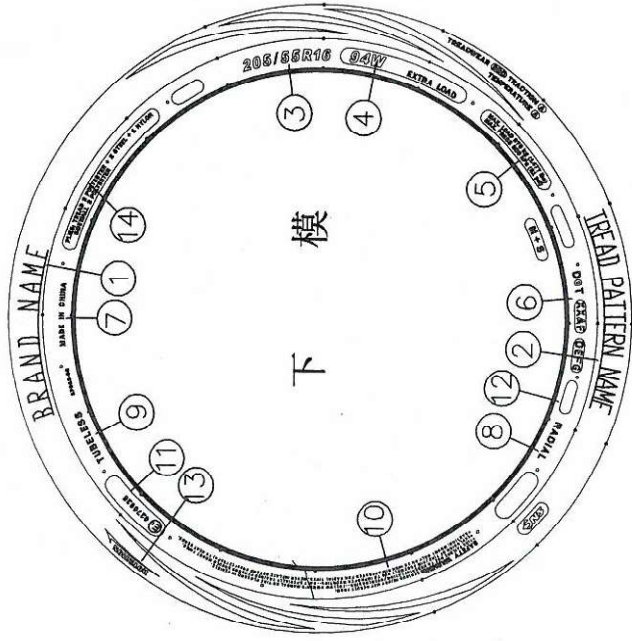

13	<u>ROTATION</u>							
12	PRODUCT DATE							
11	E4 0270925							
10	SAFETY WARNING							
9	TUBELESS							
8	RADIAL							
7	MADE IN CHINA							
6	DOT ****							
5	MAX.LOAD 670 kg(1477 lbs) MAX.PRESS 350 kPa(51 psi)							
4	94W EXTRA LOAD							
3	205/55R16							
2	REFER TO ATTACHMENT NO.1			14				
1	REFER TO ATTACHMENT NO.1							
205/55R16	94	W	T/L	632±6	214±8	165	8.0±0.3	2014.03.04
TIRE SIZE	LOAD INDEX	SPEED SYMBOL	TYPE	A (mm)	B (mm)	C (mm)	SKID DEPTH (mm)	DATE
CHECKED BY	刘杰	APPROVED BY	如蒙					
山东新大陆橡胶科技股份有限公司 SHANDONG NEW CONTINENT TIRE CO.,LTD								


ATTCHMENT NO.1

TIRE SIZE	205/55R16 94WXL
	E4 0270925

BRAND NAME	
UNIGRIP	

TREAD PATTERN NAME	
ROAD TURBO	

TREAD PATTERN

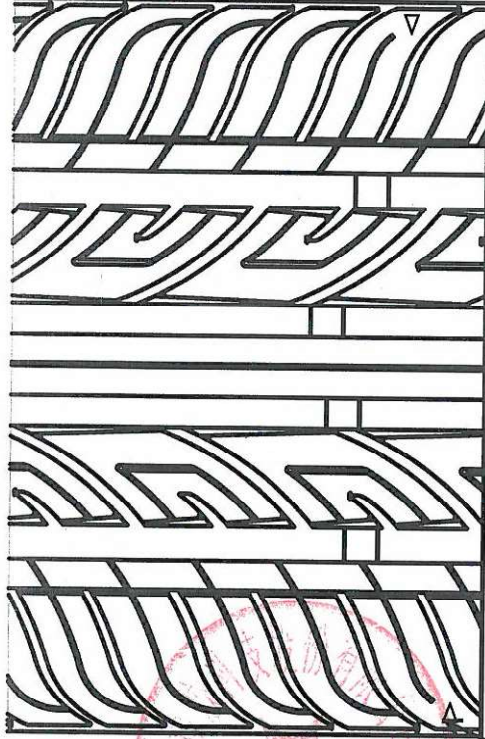

6-TREAD-WEAR INDICATORS EQUALLY SPACED

AROUND CIRCUMFERENCE OF TIRE AND MARKED BY "TRIANGLE"

Tyre size : 205/55R16
Manufacturer : Shandong New Continent Tire Co., Ltd.

TEST REPORT

according to the ECE-Regulation

Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers

including all amendments until
... ECE-R30, Amend.02, Suppl. 17...

Approval Status

ECE approval : E4-30R-0270925 Ext.00

Structure of the Test Report

Item No.

- | | |
|----|-------------------------|
| 0. | General information |
| 1. | Tested object(s) |
| 2. | Test record |
| 3. | List of appendices |
| 4. | Statement of conformity |
-

The Test Report shall be reproduced and published in full by the client only. It shall however be reproduced partially with the written permission of the Testing Laboratory only.

Tyre size : 205/55R16
 Manufacturer : Shandong New Continent Tire Co., Ltd.

0. General Information

- 0.1. Trade name or mark(s) : UNIGRIP
- 0.2. Tyre type designation(s) by the manufacturer : ROAD TURBO
- 0.3. Tyre size designation : 205/55R16
- 0.4. Manufacturer's name and address : Shandong New Continent Tire Co., Ltd.
Lushan Project Area ,Economic Development Zone ,
Yishui,Shandong,China.276400
- 0.5. No. of the information folder : n/a
 -Date of issue : March 4, 2014
 -Date of last change : ---

1. Tested object(s)

- 1.1. Object markings
- Trade name or mark : UNIGRIP
- Tyre type designation : ROAD TURBO
- Plies of Tread / Sidewall : 2 POLYESTER + 2 STEEL + 1 NYLON /
2 POLYESTER
- Tyre size designation : 205/55R16
- Category of use : Normal
- Indication of category of use : n.a.
- Structure : radial
- indication / symbol of structure : word "RADIAL", letter "R" in front of rim diameter
marking
- Speed category : W
- Load-Capacity Indices(L.I.) : 94
- Word in case of without inner tube : TUBELESS
- Word in case of reinforced tyre : EXTRA LOAD
- Date of manufacture : 1014
- 1.2. Worst case selection : n/a
- 1.3. Remarks : All versions of the types as stated in the information
folder are covered by the tested object(s) respectively.

Tyre size : 205/55R16
 Manufacturer : Shandong New Continent Tire Co., Ltd.

2. Test record

2.1. Equipment for measuring and testing : The test facilities / measurement equipment used were in compliance with the test requirements

2.2. Test results

Remarks concerning extension : ~~The type has been tested according to the modification(s) mentioned in appendix 0.~~

~~An actual practical test of the object was not necessary.~~
~~The results of the previous test(s) are still valid.~~

2.2.1. Dimension measurement according to Annex 6

Measuring rim : 6.5J x 16

Inflation pressure after mounting on measuring rim : 3.0 bar

Inflation pressure before conditioning : 2.3 bar

Conditioning of tyre : more than 24 hours

Inflation pressure after conditioning : 2.3 bar

Overall width at six equally spaced points				Height of six equally spaced tread wear indicators			
1.	212.7 mm	4.	212.8 mm	1.	1.8 mm	4.	1.8 mm
2.	212.9 mm	5.	213.1 mm	2.	1.7 mm	5.	1.9 mm
3.	213.2 mm	6.	212.9 mm	3.	1.9 mm	6.	1.9 mm
Max.:	213.2 mm						

Circumference : 1980 mm

Outer diameter : 630.3 mm

Tread depth / void to fill ratio in case of special use tyre : n/a

2.2.2. Load/speed performance test according to Annex 7

Test machine : GX-YLSN-1112

Diameter of test drum : 1.707 m

Test rim : 6.5J x 16

Inflation pressure before conditioning : 3.6 bar

Conditioning of tyre : more than 3 hours

Test-room temperature : 31.8 ~ 37.1 °C

Inflation pressure after conditioning : 3.6 bar

Tyre size : 205/55R16
 Manufacturer : Shandong New Continent Tire Co., Ltd.

Circumference before testing : 1986 mm

Outer diameter : 632.2 mm

Test load (80% x 85%) : 455.6 kg

Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	10	10	0 – 230
2.	10	20	230
3.	10	30	240
4.	10	40	250
5.	20	60	260

Conditioning after testing : more than 6 hours

Circumference after conditioning, after testing : 2005 mm

Outer diameter : 638.2 mm

Difference outer diameter before and after
 testing (max. 3.5 %) : 6.0 mm
 : 0.95 %

Inspection after test : The tyre does not exhibit tread separation, ply separation,
 cord separation, chunking or broken cords.

2.3. Additional information : The results of the test refer exclusively to the object(s)
 mentioned under point 1. of this report.

Test site : Shandong New Continent Tire Co., Ltd.
 Lushan Project Area ,Economic Development Zone ,
 Yishui,Shandong,China.276400

Test date : March 12, 2014

2.4. Remarks : ---

3. List of Appendices

Appendix 0 : List of modifications

4. Statement of conformity

The above mentioned information folder and the type described in that comply with the requirements mentioned on page 1. The mentioned test results refer to the object(s) described under point 1.1 of this report.

Engineering center Guangdong, / May 16, 2014
 SR / AY



Dipl.-Ing. Su Rui

Tyre size : 205/55R16
Manufacturer : Shandong New Continent Tire Co., Ltd.

List of modifications

Appendix 0

Correction of : ---

Modification of : ---

Addition of : ---

Deletion of : ---