

STORK LITTLE BROTHER Eco
SRLE 200 740 BC5 BU096 CSN ZH1

Project Lumteh
Customer CAPITAL SRL



CE   ZD¹ RoHS


Color  RAL 9006

Electrical	Input power	200 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.99
Optical	Optic name	BC5
	Optic type	TYPE-III
	Luminous flux	30200 lm ±10%
	Luminous efficacy	151 lm/W
	Performance temperature Tq	+25 °C
	Constant light output	No
	Color rendering index	>70
	Color temperature	4000 K
	Color tolerance	5 SDCM
	ULOR	0
Lifetime	LED quantity	96
	Lumen depreciation	L90 after 100 000 h
	Warranty	10 years
Protection	Ambient temperature range	-40 ... +50 °C
	Protection class	Class I
	Surge protection L-N	12 kV
	Surge protection L/N-PE	12 kV
	LED module thermal protection w/ NTC	No
	Ingress protection	IP66
	Impact resistance	IK10


Housing	Body material	Die-cast aluminium
	Cover material	Flat tempered glass
	Optic material	PMMA
	Color	RAL 9006 (white aluminium)
	Dimensions	665 x 280 x 104 mm
	Max wind load area SCd	0.04 m ²
	Mounting	Post top / side-entry, 60 mm
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	Tool-less

Controls	Dimming range	21 - 100%
	Socket	Zhaga (D4i) on top

Approvals	CE	Yes
	ENEC	Yes
	ENEC+	Yes
	Zhaga-D4i	Yes
	RoHS	Yes

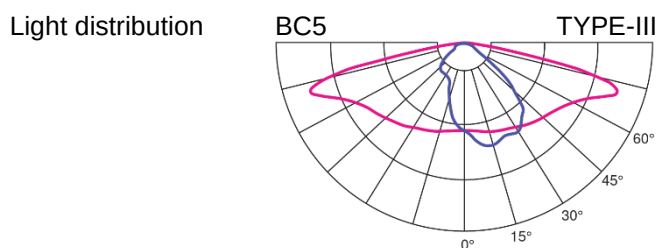

Dimensions



Product images

