



UNOBSTRUCTED AND MATERNAL LAP SWING SK-105 TECHNICAL SPECIFICATION

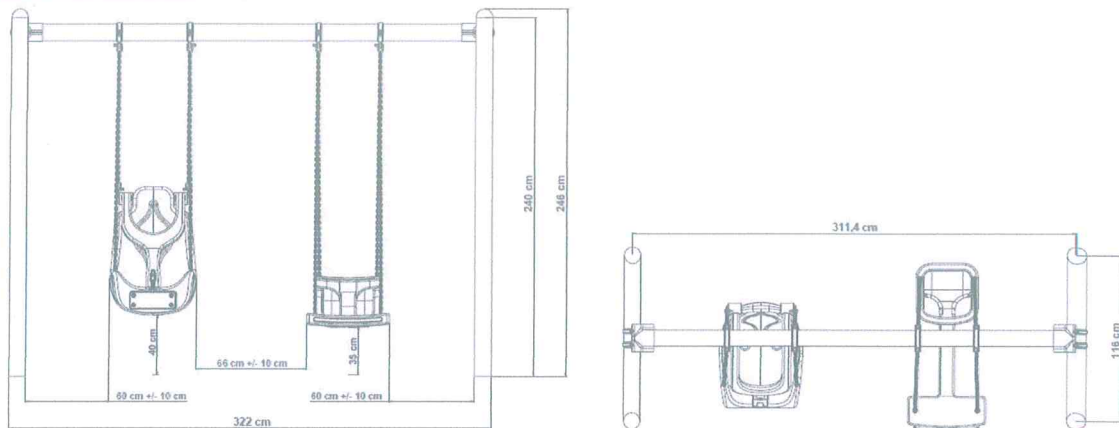

- ❖ The installation should be formed by connecting a total of 4 bearing clamps with chains, 2 for each swing, to a 300 cm-long Ø114 mm minimum 2.5 mm pipe connected by pipes with a minimum wall thickness of Ø 114 mm and 2.5 mm pipes that pass into each other on both sides.
- ❖ Definitely, a swing seat made of hard and metal material will not be used due to impact problems.
- ❖ The distance between the bottom surface of the swing seat and the Decking surface should be at least 40cm (+/-10cm).
- ❖ After the struts and carrier pipes forming the Swing are made of galvanized pipe or subjected to sand blasting, the static oven paint process should be applied.
- ❖ The connecting chains will be used as hot-dipped galvanized, with a minimum of 25 microns against rust. 6 mm caliber and double row chain should be used to prevent finger jamming.
- ❖ Polyethylene accessories that conceal the detail can be used optionally in the swing struts combinations.

MOTHER'S LAP SWING SEAT

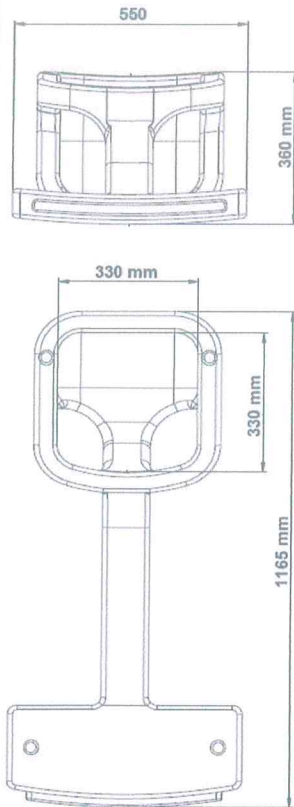

*Third, the mother's lap swing seat should be closed on the 4 side of the child's seat, and the seat where the mother will sit should be produced in such a way that there are fine lines to prevent slipping.

*Reclining Seats should be single.

*A Shock-absorbing rubber bumper should be used on the front surface of the swing seat to prevent collisions.

*The swing seat width and length should be manufactured to be 116.5x55 cm with a minimum height of 36 cm.


*The width of the seating area where the child will sit is min. it should be 33 cm.

*A Mother's lap swing seat should weigh at least 10 kg.

* According to TS EN 1176-2 / 04.02.2010 It is mandatory to have the expression "POLYETHYLENE" within the scope of the Document.

*The dyestuffs used in coloring will be in accordance with the children's health and food regulations.

UNOBSTRUCTED SWING SEAT

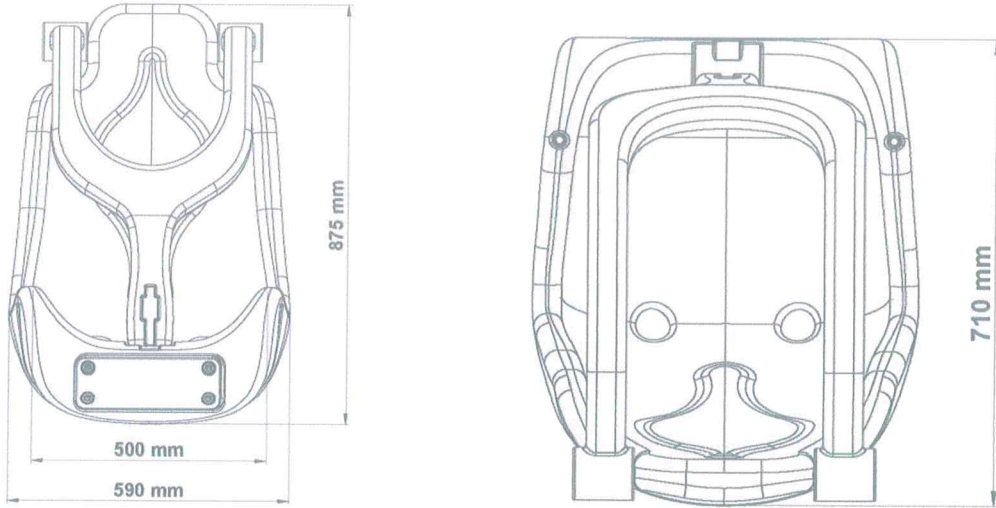

*The swing seat should consist of polyethylene material with a front protection belt for 3-side closed safety.

*Reclining seats should be single person, there should be a protection belt with a mother and child figure.

*The unobstructed swing seat should be manufactured in such a way that its width and length are 59x71 cm and its height is at least 87.5 cm.

*The width of the seating area should be at least 50 cm.

*The bracket must weigh a minimum of 10 kg along with the swing railing.

*A Shock-absorbing rubber bumper should be provided against bumps in the front part of the unobstructed seat.

*A Locked safety system should be used between the seat Decking and the protective belt for child safety. *According to TS EN 1176-2 / 04.02.2010 It is mandatory to have the expression "POLYETHYLENE" within the scope of the Document.

*The dyestuffs used in coloring will be in accordance with the children's health and food regulations.



ISILTI ÇOCUK OYUN GRUPLARI PLASTİK SAN. TİC. A.Ş.
Büyükkayacıkış Mb. 416 Nolu Sk. No:1 Selçuklu/KONYA
Tel: +90 332 502 10 79 E-mail: bilgi@isiltiplastik.com
Selçuk V.D. 468 058 7183 Ticaret Sicil No: 72098