


MECHANICAL AND SEMI AUTOMATIC OPERATING TABLES

90% RADIOTRANSparency ON TOP

100% STAINLESS STEEL

COMPLETE MOVEMENTS

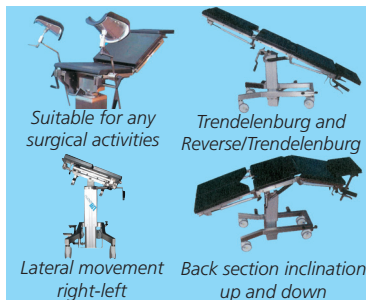

27562, 27564
+ accessories

27570

27572

27573

27560

Independently
opening, extractable
inclination legs

Several adjustment, up and
down for all sections

27568

27560

27566

STAINLESS STEEL, RADIOSURGICAL OPERATING TABLES

Designed to satisfy surgical functionality, practicality, quickness and easy maintenance. They allow, with proper accessories, to satisfy every basic surgical activity

- Table top

Divided in 5 sections (head, back, pelvis, 2 independent leg sections) with stainless steel structure and plexiglass to allow x-ray permeability and easy cleaning.

Table top is pre-arranged for the insertion of x-rays holders all over its length. Accessories holder (25x10 mm) in stainless steel, covers table top length on both sides.

- Telescopic column

Square and of limited size, covered by anodized aluminium (27560) or stainless steel (27562/4/5/6)), it allows up and down movement (approx. 70-100 cm) by a foot pedal placed at the base through a closed oleodynamic circuit with oil-tight pump avoiding any oil leakage (27560/2/4) or by remote control (27565/6).

- Mattresses

They cover all the table top length, made in a long lasting material, sterilizable in autoclave, x-ray translucent and elastics. They are independently removable.

- Base

For Solaris, it is moveable by four large antistatic castors, 2 directional and 2 pivoting with brake. For Gima and Gima TR

(mechanical and semi-automatic) base is completely made of stainless steel to ensure perfect stability. It is provided with a locking system to the floor through a foot bar. Transport is allowed by 3 antistatic wheels, one pivoting and 2 directional.

- Movements

For Solaris: Trendelenburg and Reverse/Trendelenburg with lateral tilt right-left 20° by crank. For Gima and Gima TR same table movements as above, work through a mechanical system moved by two cranks, positioned at the side, easily retractable, for semiautomatic by remote control.

- Longitudinal translation

Both Gima TR models offer manual longitudinal translation of table top of about 300 mm to allow total elimination of column encumbrance for 100% transparency of top.

- **Full range of accessories.** All tables come with mattress included, semiautomatic also includes control (with 1 m cable) batteries and crank for emergency of engine.

All operating tables are made in Italy.



27565
27566

| GIMA code | OPERATING TABLES |
|--|--|
| 27560 | Solaris operating table - mechanical |
| 27562 | Gima operating table - mechanical |
| 27564 | Gima TR operating table with longitudinal translation of table top - 100% radiotransparency |
| 27565 | Gima operating table - semiautomatic - need 27559 |
| 27566 | Gima TR operating table - semiautomatic with longitudinal translation of table top - 100% radiotransparency - need 27559 |
| ACCESSORIES FOR ALL OPERATING TABLES - 100% stainless steel | |
| 27568 | Wristlet with clamp - couple |
| 27569 | Rectangular s/s gynaecological basin - 200x320x150 mm |
| 27570 | Two-hook adjustable IV stand (needs clamp 27571) |
| 27571 | Clamp for IV stand |
| 27572 | Arm holder adjustable 90-180° with cushion and clamp |
| 27573 | Drape support with adjustable height with 2 clamps 27576 |
| 27576 | Clamp for drape support - spare |
| 27574 | Leg holder with radio transparent valve and cushion - couple (needs 2 clamps 27575) |
| 27575 | Clamp for leg holder |
| ACCESSORIES FOR SEMIAUTOMATIC TABLES (27565-6) | |
| 27558 | Infrared control |
| 27559 | Battery charger |

TECHNICAL SPECIFICATIONS

| | 27560 | 27562-27564 | 27565-27566 |
|----------------------------|---|-------------|-------------|
| Table top size | 200x48 cm | 200x48 cm | 200x48 cm |
| Height | 70-100 cm | 75-105 cm | 75-105 cm |
| Lifting system | Mechanical | Mechanical | Electric |
| - Trendelenburg | 30° | 35° | 35° |
| - Reverse Trendelenburg | 30° | 25° | 25° |
| - Lateral tilt right-left | 20° | 25° | 25° |
| Table top composition | extractable and inclinable (+25° -90°) | | |
| - Head section | by gas spring | | |
| - Back section inclination | -40° +80° | -20° +80° | -20° +80° |
| - Pelvis section size | size 48x51 cm | | |
| - Leg section | size 48x49 cm | | |
| | divided in two independent sections with following manual movements | | |
| | • opening right/left of 0°/90° | | |
| | • inclination +30° -90° | | |
| | • both parts are easily independently extractable | | |
| Table weight: | 90 kg | 160 kg | 160 kg |
| Operating table capacity: | 200 kg | 250 kg | 250 kg |
| Made in Italy | | | |