
















OLYMPIC

Wide range of designs inspired by nature provide the right solution for every taste. Olympic is a practical choice for creating attractive and comfortable living spaces.

TECHNICAL CHARACTERISTICS:

ISO 10874		Classification - residential	
ISO 24345		Total thickness	2,70 mm
ISO 24340		Wear layer thickness	0,15 mm
ISO 23997		Total weight	1,70 kg/m ²
ISO 24341		Roll width	2,5m/3m/3,5m/4m
ISO 24341		Roll length	2,5m/3m/3,5m - 35m (65m - 35m) 4m - 33m (15m - 33m)
ISO 24343-1		Residual indentation	≤0,35 mm
ISO 23999		Dimensional stability	<0,1%
EN 13501-1 EN ISO 9239-1 EN ISO 11925-2		Fire resistance	 C _{fl} -s1
ISO 105 B02 - Method 3		Light fastness (blue scale)	7/8
ISO 717/2		Sound absorption	19 dB
EN 12524		Floor heating suitability* <small>*the temperature at the surface of the floor should not exceed 27°C</small>	<input checked="" type="checkbox"/>

PRODUCT STRUCTURE:

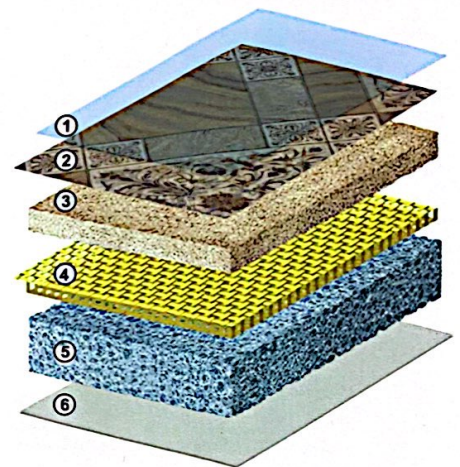

1. Protective layer
2. Design
3. Top compact
4. Glass fiber
5. Foam backing
6. Back print

Floor MUST BE GLUED
across whole surface, independent on installation area

PROMOTIONAL SAMPLE. NOT FOR SALE.

 vinyl®
SINTEROS