



**Sharma
Orthopedic (India)
Pvt. Ltd.**



PINS & WIRES ARTHROSCOPY IMPLANTS



KIRSCHNER WIRE (K - WIRE) THREADED ENDED DESCRIPTION

Suitable for	Use for Skeletal Traction and Fixation of Bone Fragments
Dia	0.6mm, 0.8mm, 1.0mm, 1.2mm
	1.5mm, 1.8mm, 2.0mm, 2.5mm
	3.0mm, 3.5mm, 4.0mm, 4.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



TAPERED THREADED PINS DESCRIPTION

Suitable for	Use for Fracture Fixations
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



DENHAM PIN DESCRIPTION

Suitable for	Use for Fracture Fixations
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



KIRSCHNER WIRE (K - WIRE) DESCRIPTION

Suitable for	Use for Skeletal Traction and Fixation of Bone Fragments
Dia	0.6mm, 0.8mm, 1.0mm, 1.2mm
	1.5mm, 1.8mm, 2.0mm, 2.5mm
	3.0mm, 3.5mm, 4.0mm, 4.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



THREADED WIRE DESCRIPTION

Suitable for	Use for Skeletal Traction and Fixation of Bone Fragments
Dia	0.6mm, 0.8mm, 1.0mm, 1.2mm
	1.5mm, 1.8mm, 2.0mm, 2.5mm
	3.0mm, 3.5mm, 4.0mm, 4.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)




SCHANZ PIN DESCRIPTION

Suitable for	Use for Fracture Fixations
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



MOORE'S PIN WITH TWO NUTS DESCRIPTION

Suitable for	Use for Fix the Subcapital Femoral Fracture
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)

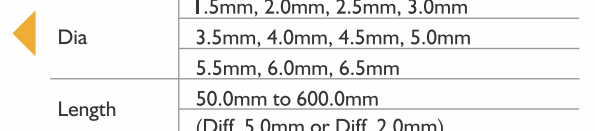



KNOWLES PIN

DESCRIPTION

Suitable for	Use for Femoral Neck & Intertrochantric Fractures
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



SQUARE NAIL FOR (RADIUS / ULNA)

DESCRIPTION

Suitable for	Use for Radius Ulna Fracture
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



WIRE REELS

DESCRIPTION

Suitable for	Use for Mini Bone & Plate Fixation
Dia	0.6mm, 0.8mm, 1.0mm, 1.2mm
	1.5mm, 1.8mm, 2.0mm, 2.5mm
	3.0mm, 3.5mm, 4.0mm, 4.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)

TRACTION SCREW

DESCRIPTION


Suitable for	Use for Pelvic Traction or External Fixator
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



RUSH NAIL

DESCRIPTION

Suitable for	Use for Radius Ulna Fracture
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)

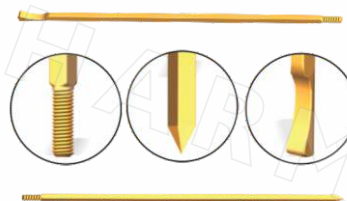


STEINMAN PIN

DESCRIPTION

Suitable for	Used for Skeletal traction and fixation of bone fragments
Dia	1.5mm, 2.0mm, 2.5mm, 3.0mm
	3.5mm, 4.0mm, 4.5mm, 5.0mm
	5.5mm, 6.0mm, 6.5mm
Length	50.0mm to 600.0mm (Diff. 5.0mm or Diff. 2.0mm)



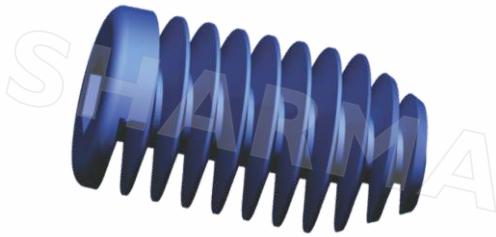

ACL SCREWS

DESCRIPTION

Suitable for	Use for soft tissue graft
Dia	6.0mm, 7.0mm, 8.0mm, 9.0mm
Length	10.0mm to 70.0mm (Diff. 5.0mm)

PCL SCREWS

DESCRIPTION

Suitable for	Use for soft tissue graft
Dia	6.0mm, 7.0mm, 8.0mm, 9.0mm
Length	10.0mm to 70.0mm (Diff. 5.0mm)



BUTTON


DESCRIPTION

Suitable for	Use for Endoscopic Femoral soft tissue fixation device
Dia	Standard
Length	Standard

DISK

DESCRIPTION

Suitable for	Use for fixating grafts with sutures
Dia	Standard
Length	Standard

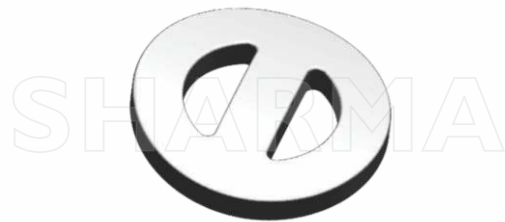



TM

Sharma Orthopedic (India) Pvt. Ltd.

445/A, G.I.D.C. Estate, Waghodia - 391 760, Dist. Vadodara, Gujarat, India.

Tele No. : +91 2668 262601 / 02 / 03 / 7698221526 / 7284003123 / 7284003125

Toll Free : 1800 123 4979 **Email :** info@sharmaortho.com, exports@sharmaortho.com

Website : www.sharmaortho.com **CIN :** U33110GJ2014PTC081007