

ACA and ACZ series

- high weighing accuracy
- very good indication readability (LCD 18mm)
- indication backlight
- automatic internal calibration (ACA)
- RS232C and USB interface for printer, computer, label printer and barcode reader



Laboratory balances ACA and ACZ series are designed for use in laboratories, pharmacies, jewelry and research institutes where high accuracy of measurement is required.



external calibration



internal calibration



GLP compatibility



products database



date/time



printout config.



pieces counting



percentage



summation



unit selection



weighing speed selection



threshold/selection



max weight



min weight



Alibi memory



animals weighing



density measurement



force measurement



recipe



statistics

Options on demand



Under hook weighing



Protective cover



Glass draft shield



ACA hydro set

hook for hanging weighed object

protective cover to secure pan



glass draft shield

ACA hydro set to measure density of liquids and solids

USB_A (for USB flash drive or AXIS printer), LAN or Wi-Fi to work with computer

barcode reader interface (RS232C+supply)

computer software : Statistics ^{freeware}, Communication ^{freeware} - saving to file, ProCell - export to Excel

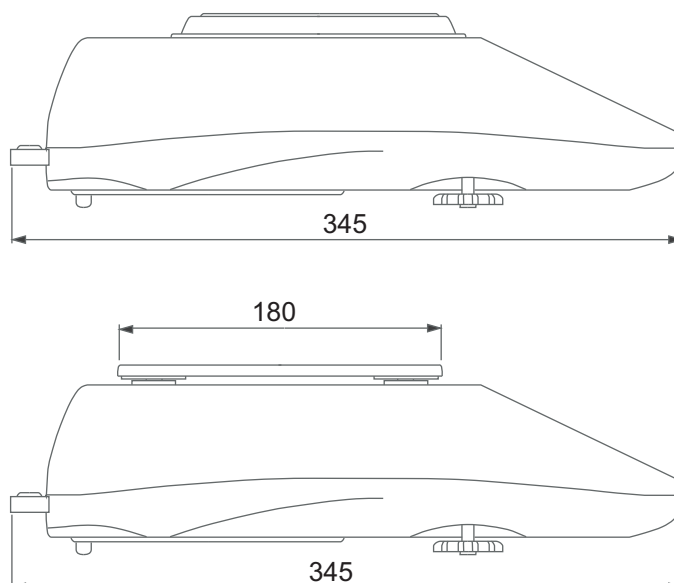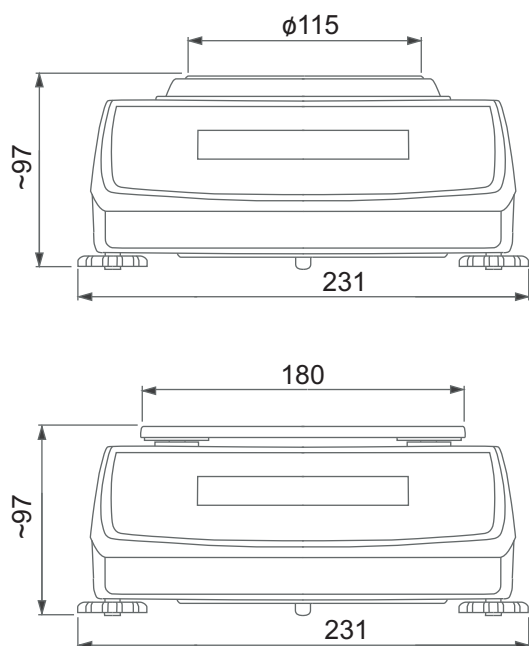

Balances with verification option

M

Technical data

Balances with int. calib.	ACA220	ACA320	ACA520	ACA620	ACA820	ACA1000	ACA2200	ACA3200	ACA4200	ACA6200
Balances without int. calib.	ACZ220	ACZ320	ACZ520	ACZ620	ACZ820	ACZ1000	ACZ2200	ACZ3200	ACZ4200	ACZ6200
Capacity (Max)	220g	320g	520g	620g	820g	1000g	2200g	3200g	4200g	6200g
Reading unit (d)	0,001g	0,001g	0,001g	0,001g	0,001g	0,001g	0,01g	0,01g	0,01g	0,01g
Verification unit (e)	0,01g	0,01g	0,01g	0,01g	0,01g	0,01g	0,1g	0,1g	0,1g	0,1g
Tare range	-220g	-320g	-520g	-620g	-820g	-1000g	-2200g	-3200g	-4200g	-6200g
Accuracy class	II									
Repeatability	0,001g						0,01g		0,02g	
Linearity	± 0,002g						± 0,02g		± 0,02g	
Working temperature	+10 ÷ +40°C									
Weighing time	<3s									
Pan size	115mm						180x180mm			
Display	LCD digits height 18mm									
Dimensions (with legs)	231x345x97mm									
Interfaces	RS232, USB-B					options: USB_A, LAN or Wi-Fi				
Units	mg, g, kg, ct, lb, oz, ozt, gr, dwt									
Power supply	~230V 50Hz 9VA / =12V 1,2A									
Balance weight	4kg									
Recommended std. of mass	F2 200g		F1 500g		E2 1000g		F2 2000g		F1 5000g	