



奥图森汽车（重庆）有限公司

Autosen Auto Co.,Ltd(Manufacturer)

Address: No.99,Xiyuan 2nd Road,Xiyong Sub-district, High-tech Zone,Chongqing, China.



ISUZU 9m3 Rear loader garbage truck

Specification:

ISUZU Garbage compactor truck		
General	Chassis Brand	ISUZU
	Overall Dimension	7600x2400x2800 mm
	GVW / Kerb Weight	11995kg / 6500kg
Cab	Cab Capacity	3 persons allowed

	Air Conditioner	Heating/cooling air conditioner	
Engine	Fuel Type	Diesel	
	Engine Brand	ISUZU	
	Power	190HP	
	Displacement	5193 ml	
	Emission Standard	Euro VI	
Chassis	Drive Type	4x2, (left hand drive)	
	Transmission	MLD 6 speed levers with 1 reverse	
	Wheelbase/No. of axle	3815mm / 3	
	Tire Specification	8.25R20	
	Tire Number	6 tires and 1 spare tire	
	Max Speed	110 km/h	
	Paint	Metallic paint	
Superstructure	Body capacity	9 cbm	
	Fill Hopper capacity	2.4 cbm	
	Sewage tank	200 liters	
	Filling work cycle time	20~25 s	
	Discharge model	Horizontal Ejection	
	Control system	Electrically Hydraulic control	
		Manual hydraulic control remote control	
	Control panel	English or Your language	
All standard accessories: Dust bin lifter, Ladder, warning lights, Emergency stop button, handrail, fire extinguisher, basic tool kit, English manual.....			

Working parameter:

Hydraulic pump	Long source large flow 32-80 pump, optional double pump and double valve	Body material	High strength T420 special steel plate
Hydraulic cylinder	Xiamen Yinhua, Yantai Future	Box thickness	Lightweight design with 4mm at the bottom and 5 sides
Multi-way valve	Jiangsu Zhongmei, Italy imports	Sewage tank	2 (1 on the side and 1 on the rear)
Conversion mode	Photoelectric switch (formerly pressure relay)	Sewage seal	Tail diversion groove + rubber hydraulic lock
Automatic control	Standard configuration, Siemens PLC electronic control	Lighting device	Tail night light
Electric control box	3 (1 in the cab and 2 in the rear)	safety devices	Tail lift with hydraulic lock
Optional configuration	Hanging plastic buckets (120L, 150L-1000L-1100L), hanging iron buckets, triangle buckets, fully sealed buckets, swing arm racks, electric hydraulic system		







outdoor

control system



Cabin control system



New craft:



New curved box body, integrated ending to reduce welding seam, spray patterns and words according to user



Super thick special rubber strip + water guide and water retaining edge, hydraulic tightening and locking.



Large-volume sewage tank at the rear, new ultra-wide sewage outlet, easy to operate without clogging




Brand multi-way valve, stable performance, low failure rate, optional double pump double valve



Xiamen Yinhua hydraulic cylinder oil leakage leakage for free



Adopt electric control + manual dual control system, install PLC one key



The main push plate is made of T420 special steel, with light structure and



Sewage collection box, new diversion channel, anti-slag design, walking

Detailed Images



240L trash can



600L trash can



Fully sealed bucket



Air control back cover



PRODUCT DETAILS



High-density, high-pressure hydraulic oil pipe, multiway valve, oil pump



01

Siemens circuit operation, Hydraulic cylinders can be automatic retraction



02



Different kinds of garbage tipping mechanism in the rear can be optional



03




The sealing of the filling device and the body box be sealed by hydraulic lock, the rubbish can be reliably sealed in the truck.



04



Technical Drawing :

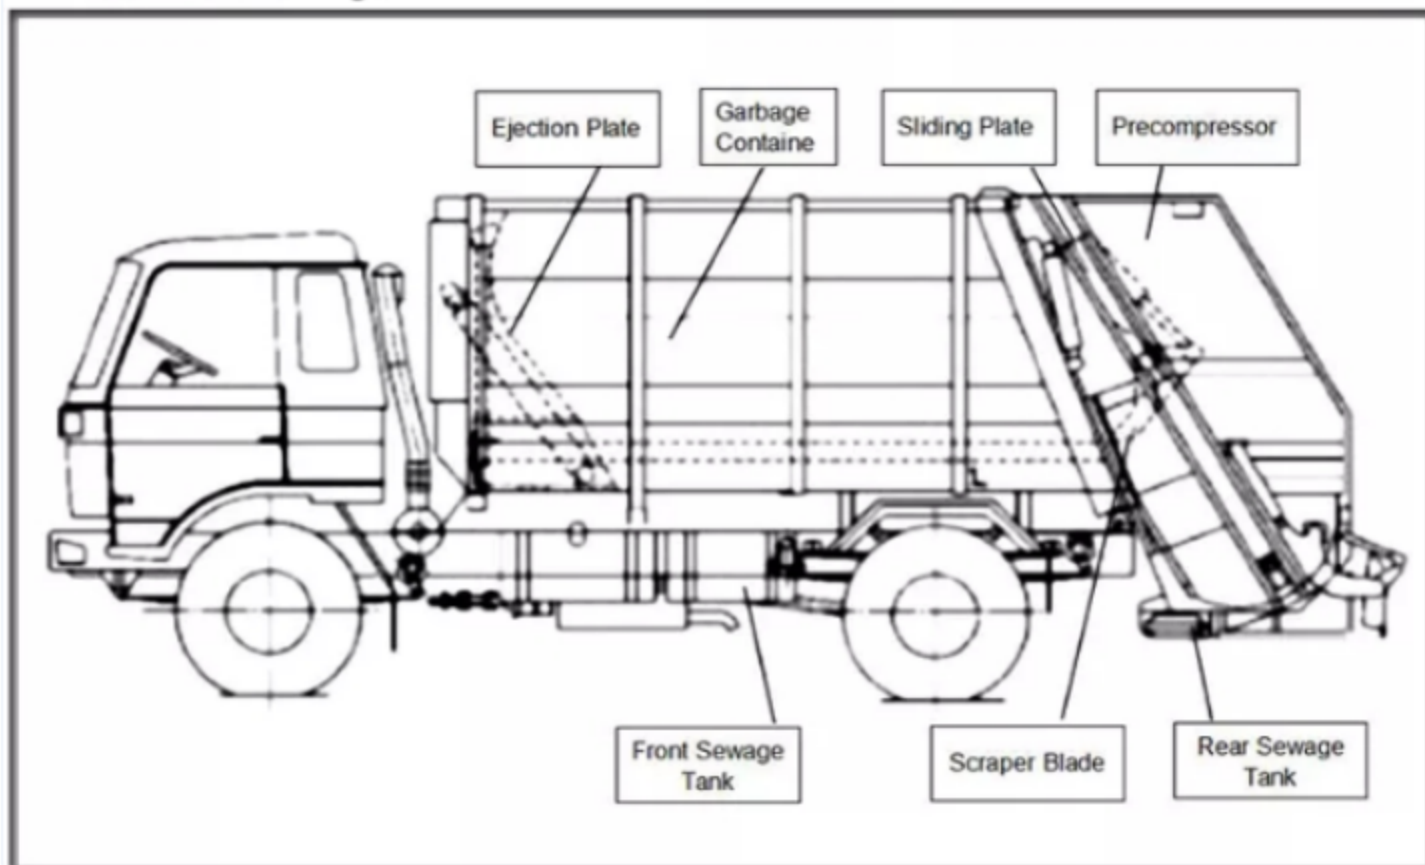

Workshop:



APPLICATION SCENARIOS

