

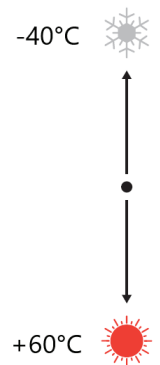



ARDE ROUND



- » Corrosion resistant die-cast aluminium body.
- » 10KV Surge Protector available.
- » Mains voltage: 170-264V / 50Hz.
- » Up to 140Lm/W efficiency.
- » Protection Class: Class I
- » Life time: 100.000hours
- » Power Factor: ≥ 0.95
- » All external screws are stainless steel.
- » Double layer polyester powder paint resistant to corrosion and salt spray fog.
- » Spigot for diameter: $\varnothing 60\text{mm}$
- » Mechanical aiming lock.
- » Clever thermal design with tempered Glass.
- » ENEC certified Power Supplier.

- White
- Light Grey
- Dark Grey
- Black

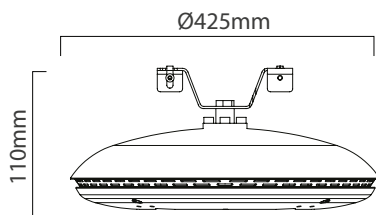

LBL.STR.5.100

Led Type	SMD LED	
System Power	100W	
Lumen Output	4000K	14000Lm
Power Factor	≥ 0.95	
Frame Dia \varnothing	425mm	
Height	110mm	

LBL.STR.5.120

Led Type	SMD LED	
System Power	120W	
Lumen Output	4000K	16800Lm
Power Factor	≥ 0.95	
Frame Dia \varnothing	425mm	
Height	110mm	

