

EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming, telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard

G FACTOR

High G factor: reduced residual moisture, reduced drying time, energy savings

EFFICIENCY

Optimized consumption: automatic or manual adjustment of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC

VERSATILITY

ELECTRIC <> HOT WATER
MAKE TO ORDER: possibility to customize
WET CLEANING as standard

CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry
Multi-payment system

ERGONOMICS

Big aluminium door
Easy door lock system

MAINTENANCE

Hinged panel: easy access to parts
Technical menu: statistics, errors...

OTHERS

Free standing: no anchoring to the floor
Stainless steel vat and drum, skinplate outer casing
3 water inlets
Detergents box with compartments
Imbalance controlled by frequency inverter
CE standards and KIWA for REG4 standards



OPTIONS


- Dosing pumps kit DQ-2
- RT Ready for AQUABAC XL conn. 3/4" for washers WEN/WED-11/14/18/22/28
- Additional dosing pump DB-1
- DD Double drain kit WED-14-18-22
- P Drain-pump kit WED-11-14
- Kit WATERMARK Australia
- NC Normally closed valve WED-14
- RC AQUA FLOW water recirculation kit WED-14 (not available with AQUABAC)
- LG Level feet kit WED-11 to 28
- WS weighing system WED-11 to 45C
- XD 6 extra dosing signals card WED-11-45C
- SG Silicon gasket WED-WEN 11-14
- RD reverse door opening
- TR Protected board ET2 for WED-11-45C (standard on 60 to 120 kg models)
- Steam kit WED-11 to 22 (to transform E or HW models to steam)
- Mops plinth stainless steel WED-14
- Mops plinth skinplate WED-14
- Self plinth same height of machine stainless steel WED-14
- Self plinth same height of machine skinplate WED-14
- Ergonomic plinth stainless steel WED-14
- Ergonomic plinth skinplate WED-14
- SSC Stainless steel outer casing AISI-304 WED-14
- SSF Stainless steel front panel AISI-304 WED-14
- 440V 3~ (No N) 50/60 Hz 14
- IoT licence - Danube Online
- Several payment systems for self-service
- UD Kit temporized door opening WED-WEN

DRUM	UNIT.	WED-14 ET2	
Capacity 1/9	Kg	14	
Capacity 1/10	Kg	13	
Volume	l	130	
Diameter	mm	620	
Depth	mm	430	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	50 / 1.204	
G Factor	-	500	
Maximum force transmitted	KN	2,49 ±1,05	
Frequency-dynamic force	Hz	16,7	
Noise level	dB	< 70	
Coin laundry version	-	YES	
Double drain	-	OPT.	
Weighing system	-	OPT.	
Tilting system	-	NO	
DOOR			
Height door bottom	mm	440	
Diameter	mm	373	
POWER			
Motor	kW	1,1	
Electric heating power	kW	9	
Total electric power (electric model)	kW	9,4	
Total electric power (hw, steam model)	barG	1,1	
CONNECTIONS		E	HW/S
Tension 110V - I + N + T	Nº x mm ² / A	-	-
Tension 230V - I + N + T	Nº x mm ² / A	2x10+T - 50A	2x1,5+T - 16A
Tension 230V - III + T	Nº x mm ² / A	3x4+T - 32A	-
Tension 400V - III + N + T	Nº x mm ² / A	4x1,5+T - 16A	-
Steam inlet (Steam model)	inch	1/2"	
Maximum steam consumption (Steam model)	Kg/h	8,5	
Water inlet	inch	3/4"	
Water main pressuer	Kgs/cm ²	2-4	
Maximum water consumption*	Lit/h	88,8*	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width/Gross width	mm	788 / 850	
Net Depth/Gross depth	mm	869 / 1.015	
Net Height / Gross height	mm	1.307 / 1.600	
Net weight / Gross weight	kg	236 / 274,5	
Volume	m ³	1,38	

* Program number 20: WED-11 to WED-80C at 75% load /WED-100C and 120C at 100% load.

** 400V version / 230V version



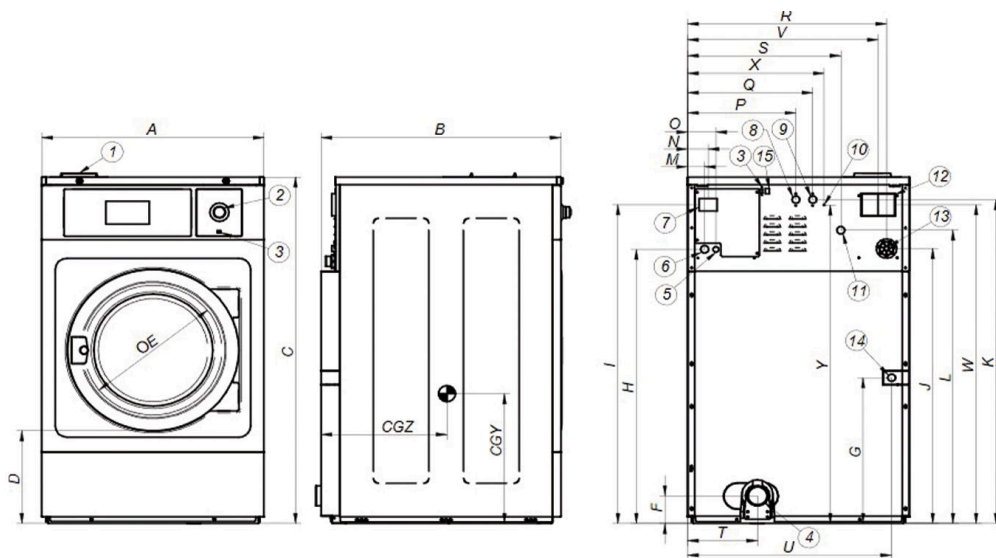

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain
5. Electric connection to liquid soap pumps
6. Electrical connection
7. Main switch
8. Auxiliar water inlet
9. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Steam output
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WED-11	mm	692	830	1 185	370	373	125	354	913	1 085	916	1 100	985	61	74	101	292	352	610	448	226	626	580	1 080	442	1 145	424	577
WED-14	mm	788	869	1 307	440	373	125	385	1 034	1 202	1 037	1 221	1 106	61	74	101	385	445	706	544	243	718	676	1 202	485	1 201	450	651



STD-18 BRONZE XP EM STD BRONZE XP stack dryers



ELECTRONIC CONTROL

Easy-to-use electronic control with push buttons to control temperature and time



FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry use



ERGONOMICS

Drawer as fluff filter, stainless steel mesh
Biggest door diameters



MAINTENANCE

Hinged control panel: easy and ergonomic access
Technical menu: statistics for technicians and maintenance with external console (option)
Easy access to components



OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating (except STD-22 XP model: only gas)
CE approved



OPTIONS

- DG Double door glass STD (1 unit per stack)
- BMS New display for EM programmer (2 units for STD)
- F03 Fluff filter with grid 0,3 mm (standard is 0,6 mm STD)
- NG Natural gas heated tumble dryer (LPG as standard)
- SSC Stainless steel outer casing (AISI-304) 18 STD
- 400V 3~ 50 Hz STD-11-18
- SSF Stainless steel front panel AISI-304 STD 11-14-18
- 400V 3N 60 Hz STD-11-35
- 400V 3~60Hz STD-11-22
- 230V 3~ 60 Hz STD-11-18 G
- 230V 3~ 60 Hz STD-11-18 E
- 440V/480V 3~ 60 Hz STD-11-22
- WB Wooden packing STD-18
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	STD-18 BRONZE XP EM	
Capacity 1/18		Kg	18,3 x 2	
		lb	40,3 x 2	
Capacity 1/20		Kg	16,5 x 2	
		lb	36,4 x 2	
Ø Drum		mm	750	
		inch	29,5	
Drum length		mm	746	
		inch	29,4	
Drum volume		l	330	
		cu ft	11,64	
Ø Door hole		mm	574	
		inch	22,6	
Door center height		mm	547 / 1522	
		inch	21,54 / 59,92	
Height from floor to bottom of door		mm	189 / 1164	
		inch	7,32 / 45,83	
ELECTRIC HEATING				
Evaporation capacity *		L/h *	15,5 x 2	
		US gallon/h *	3,96 x 2	
Hourly output**		Kg/h **	31 x 2	
		lb/h **	66,1 x 2	
Installed heating power		kW	18 x 2	
Installed electrical power		kW	37,34	
Drum motor power		kW	0,37 x 2	
GAS HEATING				
Evaporation capacity*		L/h	16 x 2	
		US gallon/h	4,22 x 2	
Hourly output **		Kg/h	32 x 2	
		lb/h	70,9 x 2	
Installed gas heating power		kcal/h	17627 x 2	
		Btu/h	69996 x 2	
		kW	20,5 x 2	
Installed electrical power		kW	1,34	
Instant LPG gas consumption (G31)		Kg/h	1,76 x 2	
		lb/h	3,88 x 2	
Instant natural gas consumption (G20)		m³/h	2,17 x 2	
		cfm	1,28 x 2	
Ø Gas inlet		BSPP ISO 228-1	3/4"	
VENTILATION				
Fan motor power		kW	0,25 x 2	
Nominal air flow rate		m³/h	500 x 2	
		cfm	294,28 x 2	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	3,3	
		Btu/h	11198	
Max. front heat emission		kW	1,2	
		Btu/h	4199	
CONNECTIONS			E	G
Tension 230V - I + N + T		Nº x mm² / A	-	3 x 2,5 / 16A
Tension 230V - III + T		Nº x mm² / A	4 x 50 / 125A	3 x 2,5 / 16A (5*)
Tension 400V - III + N + T		Nº x mm² / A	5 x 16 / 63A	3 x 2,5 / 16A (6*)
NET DIMENSIONS / PACKING DIMENSIONS				
Net / gross width		mm	785 / 865	
		inch	30,9 / 34,1	




Net / gross depth	mm	1271 / 1354
	inch	50 / 53,3
Net / gross height	mm	1994 / 2126
	inch	78,5 / 83,7
Net / gross weight	Kg	314 / 329
	lb	692 / 725
OTHERS		
Max. sound level (1 m in front)	dB	64

* Drying conditions: full load (1/20) of towels, drying temperature 90°C.

** Kg dry linen per hour, according to the above drying conditions.

(5*) Connect 2 phases and earth

(6*) Connect phase, neutral and earth

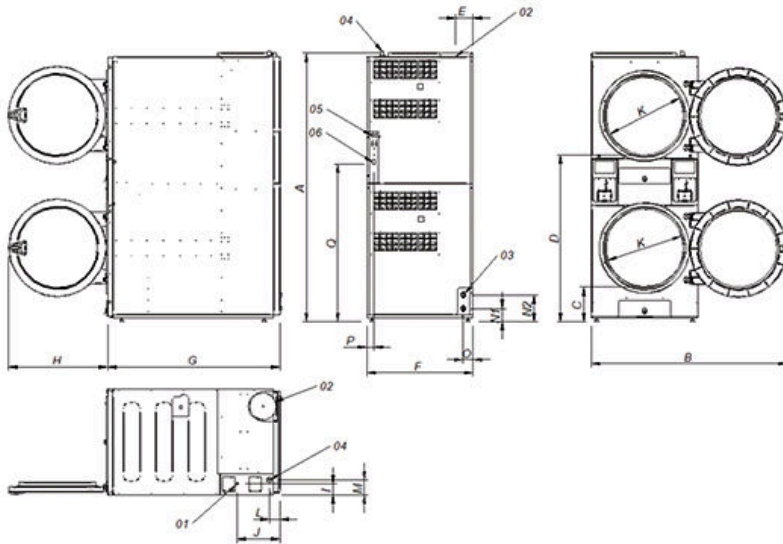

- 01. Power supply
- 02. Fumes extraction \varnothing 200 mm
- 03. 2 sprinkler valves 3/4"
- 04. Gas inlet 1/2"
- 05. Ethernet connection (ET2 model only)
- 06. ON/OFF control switch

		A	B	C	D	E	F	G	H	I	J	K	L	M	N1	N2	O	P	Q
STD-11 XP	mm	1980	1447	259	1234	131	785	1001	735	83	318	575	77	113	97	197	73	54	1163
STD-14 XP	mm	1980	1447	259	1234	131	785	1135	735	83	318	575	77	113	97	197	73	54	1163
STD-18 XP	mm	1980	1447	259	1234	131	785	1271	735	83	318	575	77	113	97	197	73	54	1163

