

ETICS-CoA-002-2018



European Testing Inspection and Certification System

CERTIFICATE OF ACCEPTANCE

SGS Belgium N.V. - Division SGS CEBEC

Bld. Internationalelaan, 55/D, Brussels Belgium

has been assessed and determined to fully comply with the requirements of EN-ISO/IEC 17065, PD ECS 050 and the Rules of Procedure relevant to the European Schemes for which the responsible CB is member.

SGS Belgium N.V. – Division SGS CEBEC

is therefore entitled to operate as Certification Body within the European Schemes ENEC, ENEC+, CCA, CCA EMC, HAR and KMK for the Scope (Product Category(ies) and Standard(s)) as listed in the relevant part of the ETICS Web Site at

www.etics.org.

This certificate remains valid until 15th January 2021, at which time it will be reissued by the ETICS Secretary General upon successful completion of the normally scheduled 3-year Reassessment Programme administered by the ETICS.

Brussels, 15 January 2018

Giancarlo Zappa, Secretary General



Annexe au certificat d'accréditation
Bijlage bij accreditatie-certificaat
Annex to the accreditation certificate
Beilage zur Akkreditierungszertifikat

226-TEST

EN ISO/IEC 17025:2005

Version/Versie/Version/Fassung	8
Date d'émission / Uitgiftedatum / Issue date / Ausgabedatum:	2017-12-18
Date limite de validité / Geldigheidsdatum / Validity date / Gültigkeitsdatum:	2021-05-27

Nicole Meurée-Vanlaethem

La Présidente du Bureau d'Accréditation

Voorzitster van het Accreditatiebureau

Chair of the Accreditation Board

Vorsitzende des Akkreditierungsbüro

L'accréditation est délivrée à/ De accreditatie werd uitgereikt aan/
The accreditation is granted to/ Die akkreditierung wurde erteilt für:

LABORATOIRE DE PHOTOMETRIE DE R-TECH

Rue de Mons, 3

4000 LIEGE

Secrétariat:

Service public fédéral, Economie,
P.M.E., Classes moyennes et Energie
Direction générale de la Qualité et de la Sécurité
Division Qualité et Innovation
Bd du Roi Albert II, 16 - 5^{ème} étage - B-1000 Bruxelles
Website: <http://economie.fgov.be>
Numéro d'entreprise: 0314.595.348

Accréditation BELAC Accreditation

Tél: +32 2 277 54 34
Fax: +32 2 277 54 41

Internet: <http://belac.fgov.be>
E-Mail: Belac@economie.fgov.be

Secretariaat:

Federale Overheidsdienst, Economie,
K.M.O., Middenstand en Energie
Algemene Directie Kwaliteit en Veiligheid
Afdeling Kwaliteit en Innovatie
Koning Albert II-laan 16 - 5^{de} verd. - B-1000 Brussel
Website: <http://economie.fgov.be>
Ondernemingsnummer: 0314.595.348

.be

Code essai	Echantillons	Caractéristique mesurée Gamme de mesure	Description méthode d'essai Equipement
Test Code	Samples	Measurement Measurement range	Testing Methodology Description Equipment
PTP-01	Lampes à incandescence ou à décharge pour luminaires. <i>Incandescent or high intensity discharge lamp for luminaires.</i>	Flux lumineux exprimé en lumen (lm) <i>Luminous flux in lumen (lm)</i>	Mesure du flux lumineux en sphère d'Ulbricht selon la norme de référence EN 13032-1 § 6.1.2. Pour toutes lampes sauf les LED (Solid State Lighting) <i>Luminous flux measurement with Ulbright's sphere according to EN 13032 § 6.1.2 Standard for all light sources except LED (Solid State Lighting)</i>
PTP-01	Sources lumineuses de type LED pour luminaires. <i>Led light source for luminaires.</i>	Flux lumineux exprimé en lumen (lm) <i>Luminous flux in lumen (lm)</i>	Mesure du flux lumineux en sphère d'Ulbricht selon la norme de référence EN 13032-1 § 6.1.2, EN 13032-4, CIE S 025/E et IES LM79-08. Pour LED (Solid State Lighting) <i>Luminous flux measurement with Ulbright's sphere according to EN 13032-1 § 6.1.2, EN 13032-4, CIE S 025/E et IES LM79-08 Standard. For LED (Solid State Lighting)</i>
PTP-02	Luminaires pour lampes à incandescence ou à décharge <i>Luminaires for incandescent, HID lamp</i>	Distribution des intensités lumineuses exprimées en candela (cd) <i>Light distribution in candela (cd)</i>	Relevé photométrique au goniophotomètre selon la norme de référence EN 13032-1 et CIE 121-1996 Pour toutes lampes sauf les LED (Solid State Lighting) <i>Light distribution measurement with gonio according to EN 13032-1 and CIE 121-1996 Standard for all light sources except LED (Solid State Lighting)</i>

Code essai	Echantillons	Caractéristique mesurée Gamme de mesure	Description méthode d'essai Equipement
Test Code	Samples	Measurement Measurement range	Testing Methodology Description Equipment
PTP-02	Luminaires à sources lumineuses de type LED pour luminaires. <i>Luminaires for LED light sources.</i>	Distribution des intensités lumineuses exprimées en candela (cd) <i>Light distribution in candela (cd)</i>	Relevé photométrique au goniophotomètre selon la norme de référence EN 13032-1, EN 13032-4, CIE S 025/E, CIE 121-1996 et IES LM79-08 Pour les LED (Solid State Lighting) <i>Light distribution measurement with gonio according to EN 13032-1, EN 13032-4, CIE S 025/E, CIE 121-1996 et IES LM79-08 Standard. For LED (Solid State Lighting)</i>
PTP-09	Lampes à incandescence ou à décharge pour luminaires ou luminaires associés. <i>Incandescent or high intensity discharge lamp for luminaires or associated luminaires.</i>	Données colorimétriques : IRC, T° de couleur, coordonnées trichromatiques, données spectrales (domaine du visible) <i>Colorimetric values, CRI, CCT, tristimulus values, spectrum (visible range)</i>	Relevé colorimétrique en sphère via spectromètre selon la norme de référence EN 13032-1 et CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) Pour équipements lumineux sauf ceux incluant des LED (Solid State Lighting) <i>Colorimetric measurement with spectrometric sphere to EN 13032-1 and CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) Standard for all light equipment exept LED (Solid State Lighting)</i>
PTP-09	Sources lumineuses de type LED pour luminaires ou luminaires associés. <i>Led light source for luminaires or associated luminaires.</i>	Données colorimétriques : IRC, T° de couleur, coordonnées trichromatiques, données spectrales (domaine du visible) <i>Colorimetric values, CRI, CCT, tristimulus values, spectrum (visible range)</i>	Relevé colorimétrique en sphère et spectromètre selon la norme de référence EN 13032-1, EN 13032-4, CIE S 025/E et CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) et IES LM79-08 pour équipements lumineux à LED (Solid State Lighting) <i>Colorimetric measurement with spectrometric sphere according to EN 13032-1, EN 13032-4, CIE S 025/E et CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) and IES LM79-08 Standard. For LED light equipment (Solid State Lighting)</i>



Bijlage bij accreditatie-certificaat
Annexe au certificat d'accréditation
Annex to the accreditation certificate
Beilage zur Akkreditierungszertifikat

472-TEST

NBN EN ISO/IEC 17025:2005

Versie/Version/Fassung	5
Uitgiftedatum / Date d'émission / Issue date / Ausgabedatum:	2017-02-14
Geldigheidsdatum / Date limite de validité / Validity date / Gültigkeitsdatum:	2020-09-10

Nicole Meurée-Vanlaethem

Voorzitster van het Accreditatiebureau

La Présidente du Bureau d'Accréditation

Chair of the Accreditation Board

Vorsitzende des Akkreditierungsbüro

**De accreditatie werd uitgereikt aan/ L'accréditation est délivrée à/
The accreditation is granted to/ Die akkreditierung wurde erteilt für:**

**SGS Belgium NV
Division SGS CEBEC - Laboratory
Internationalelaan - Boulevard International, 55D
1070 BRUSSEL - BRUXELLES**

Secrétariat:

**Service public fédéral, Economie,
P.M.E., Classes moyennes et Energie**

Direction générale de la Qualité et de la Sécurité
Division Qualité et Innovation

Bd du Roi Albert II, 16 - 5^{ème} étage - B-1000 Bruxelles

Website: <http://economie.fgov.be>

Numéro d'entreprise: 0314.595.348

Accréditation BELAC Accreditation

Tél: +32 2 277 54 34

Fax: +32 2 277 54 41

Internet: <http://belac.fgov.be>

E-Mail: Belac@economie.fgov.be

Secretariaat:

**Federale Overheidsdienst, Economie,
K.M.O., Middenstand en Energie**

Algemene Directie Kwaliteit en Veiligheid
Afdeling Kwaliteit en Innovatie

Koning Albert II-laan 16 - 5^{de} verd. - B-1000 Brussel

Website: <http://economie.fgov.be>

Ondernemingsnummer: 0314.595.348



Product/Object	Parameter determined	Reference
Tests on ELECTRICAL Safety		
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50396 Non electrical test methods for low voltage energy cables EXCLTests: Test of resistance to hot particles
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-1 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (Uo/U) - Part 1 : General requirements
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-2-11 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (Uo/U) - Part 2-11: Cables for general applications - Flexible cables with thermoplastic PVC insulation
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-2-21 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (Uo/U) - Part 2-21 : Cables for general applications - Flexible cables with crosslinked elastomeric insulation.
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-2-31 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (Uo/U) - Part 2-31 : Cables for general applications - Single core non-sheathed cables with thermoplastic PVC insulation
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-2-42 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (Uo/U) - Part 2-42 : Cables for general applications - Single core non-sheathed cables with crosslinked EVA insulation

Product/Object	Parameter determined	Reference
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-2-82 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V (Uo/U) - Part 2-82 : Cables for general applications - Cables with crosslinked elastomeric insulation for decorative chains
Electical Cables	Tests electrical safety as detailed in the standard	NBN EN 50525-3-31 Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V Part 3-31 : Cables with special fire performance - Single core non-sheathed cables with halogen-free thermoplastic insulation, and low emission
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60227-2 Polyvinylchloride insulated of rated volatages up to and including 450/750V - Part 2 Test methods
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60227-3 Polyvinylchloride insulated of rated volatages up to and including 450/750V - Non sheathed cables for fixed wiring
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60227-4 Polyvinylchloride insulated of rated volatages up to and including 450/750V - Sheathed cables for fixed wiring
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60227-5 Polyvinylchloride insulated of rated volatages up to and including 450/750V - Flexible cables (cords)
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60245-2 Rubber insulated cables - Rated voltages up to and including 450/750 V – Part 2:Test methods
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60245-4 Rubber insulated cables - Rated voltages up to and including 450/750 V - Cords and flexible cables
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60245-6 Rubber insulated cables - Rated voltages up to and including 450/750 V - Arc welding electrode cables
Electical Cables	Tests electrical safety as detailed in the standard	IEC 60245-8 Rubber insulated cables - Rated voltages up to and including 450/750 V - Cords for applications requiring high flexibility

Product/Object	Parameter determined	Reference
Electromechanical contactors for household and similar purposes	Tests electrical safety as detailed in the standard	IEC NBN EN 61095 Electromechanical contactors for household and similar purposes Only § 9.2.4; 9.2.2.2 To 9.2.2.6; 9.2.6; 9.2.7
Household and similar electrical appliances. - General requirements.	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-1 Household and similar electrical appliances. - General requirements EXCLTests: Abnormal operation; Oxygembomb; Annex F
Household and similar electrical appliances - Particular requirements for vacuum cleaners and water-suction cleaning appliances (IEC 60335-2-2:2009,IDT)	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-2 Household and similar electrical appliances - Safety - Part 2-2: Particular requirements for vacuum cleaners and water-suction cleaning appliances (IEC 60335-2-2:2009,IDT)
Household and similar electrical appliances - Electric irons	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-3 Household and similar electrical appliances - Electric irons
Household and similar electrical appliances – Cooking ranges, hobs, ovens and similar	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-6 Household and similar electrical appliances – Cooking ranges, hobs, ovens and similar
Household and similar electrical appliances – Shavers, hair clippers	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-8 Household and similar electrical appliances – Shavers, hair clippers
Household and similar electrical appliances – Grills, toasters and similar appliances	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-9 Household and similar electrical appliances – Grills, toasters and similar appliances

Product/Object	Parameter determined	Reference
Household and similar electrical appliances - Particular requirements for warming plates and similar appliances.	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-12 Household and similar electrical appliances - Safety - Part 2-12: Particular requirements for warming plates and similar appliances.
Household and similar electrical appliances. Deep fat fryers, frying pans, and similar appliances	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-13 Household and similar electrical appliances. Deep fat fryers, frying pans, and similar appliances
Household and similar electrical appliances - Kitchen machines	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-14 Household and similar electrical appliances - Kitchen machines
Household and similar electrical appliances - Appliances for heating liquids	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-15 Household and similar electrical appliances - Appliances for heating liquids
Household and similar electrical appliances - Storage water heaters	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-21 Household and similar electrical appliances - Storage water heaters
Household and similar electrical appliances - Appliances for skin or hair care	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-23 Household and similar electrical appliances - Appliances for skin or hair care
Household and similar electrical appliances - Battery chargers EXCLTests: Mechanical Strenght. Vibration test	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-29 Household and similar electrical appliances - Battery chargers EXCLTests: Mechanical Strenght. Vibration test

Product/Object	Parameter determined	Reference
Household and similar electrical appliances - Room heaters	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-30 Household and similar electrical appliances - Room heaters
Household and similar electrical appliances - Range hoods EXCLTests: Resistance to heat and fire(Test acc ISO9772)	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-31 Household and similar electrical appliances - Range hoods EXCLTests: Resistance to heat and fire(Test acc ISO9772)
Household and similar electrical appliances - Massage appliances	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-32 Household and similar electrical appliances - Massage appliances
Household and similar electrical appliances - Particular requirements for instantaneous water heaters	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-35 Household and similar electrical appliances - Safety - Part 2-35: Particular requirements for instantaneous water heaters
Household and similar electrical appliances – Commercial el. Ranges ovens and hob elements	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-36 Household and similar electrical appliances – Commercial el. Ranges ovens and hob elements
Household and similar electrical appliances – Commercial electric griddles and griddle grills	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-38 Household and similar electrical appliances – Commercial electric griddles and griddle grills
Household and similar electrical appliances – Commercial electric forced convection ovens, steam cookers and steam-convection ovens	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-42 Household and similar electrical appliances – Commercial electric forced convection ovens, steam cookers and steam-convection ovens

Product/Object	Parameter determined	Reference
Household and similar electrical appliances – Clothes dryers and towel rails	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-43 Household and similar electrical appliances – Clothes dryers and towel rails
Household and similar electrical appliances – Commercial Electric grills and toasters EXCLTests: Resistance to heat and fire (Test acc ISO9772)	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-48 Household and similar electrical appliances – Commercial Electric grills and toasters EXCLTests: Resistance to heat and fire (Test acc ISO9772)
Household and similar electrical appliances – Commercial Electric bains-marie	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-50 Household and similar electrical appliances – Commercial Electric bains-marie
Household and similar electrical appliances – Whirlpool baths	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-60 Household and similar electrical appliances – Whirlpool baths
Household and similar electrical appliances - Particular requirements for commercial dispensing appliances and vending machines	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-75 Household and similar electrical appliances - Safety - Part 2-75: Particular requirements for commercial dispensing appliances and vending machines
Household and similar electrical appliances – Fans	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-80 Household and similar electrical appliances – Fans

Product/Object	Parameter determined	Reference
Household and similar electrical appliances – Commercial refrigerating appliances with an incorporated or remote refrigerant condensing unit or compressor	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-89 Household and similar electrical appliances – Commercial refrigerating appliances with an incorporated or remote refrigerant condensing unit or compressor EXCLTests: Construction. Test for flammable refrigerants(IEC60079-15)
Household and similar electrical appliances.- Gas, oil and solid-fuel burning appliances having electrical connections	Tests electrical safety as detailed in the standard	IEC NBN EN 60335-2-102 Household and similar electrical appliances.- Gas, oil and solid-fuel burning appliances having electrical connections
Boxes and enclosures for electrical accessories for household and similar fixed electrical installations -	Tests electrical safety as detailed in the standard	IEC NBN EN 60670-1 Boxes and enclosures for electrical accessories for household and similar fixed electrical installations - Part 1: General requirements EXCL. § 21
Switches for household and similar fixed-electrical installations - General requirements	Tests electrical safety as detailed in the standard	IEC NBN EN 60669-1 Switches for household and similar fixed-electrical installations - Part 1: General requirements EXCLTests: Inspection and chemical tests on metals of current carrying parts. EXCL.§ 18; 19; 26
Switches for household and similar fixed electrical installations - Electronic switches	Tests electrical safety as detailed in the standard	NBN EN 60669-2-1 Switches for household and similar fixed electrical installations - Part 2-1: Particular requirements - Electronic switches EXCLTests: § 26.1.1;26.1.2;26.1.3; 26.1.4; 26.1.5; 18.102;13.103; 101;102

Product/Object	Parameter determined	Reference
Switches for household and similar fixed electrical installations - Electromagnetic remote-control switches (RCS)	Tests electrical safety as detailed in the standard	IEC NBN EN 60669-2-2 Switches for household and similar fixed electrical installations - Part 2: Particular requirements -- Section 2: Electromagnetic remote-control switches (RSC) EXCLTests: § 26 ; 101; 102; 13.103; 18.102
Switches for household and similar fixed electrical installations - Time delay switches (TDS)	Tests electrical safety as detailed in the standard	IEC NBN EN 60669-2-3 Switches for household and similar fixed electrical installations - Part 2-3: Particular requirements - Time delay switches (TDS) EXCLTests: § 26 ; 101; 102; 13.103; 18.102
Switches for household and similar fixed electrical installations - Isolating switches	Tests electrical safety as detailed in the standard	IEC NBN EN 60669-2-4 Switches for household and similar fixed electrical installations - Part 2-4: Particular requirements - Isolating switches EXCLTests: § 17; 18; 19; 26 ; 16.101; 18.101; 22.5 to 22.7
Plugs and socket-outlets for household and similar purposes -	Tests electrical safety as detailed in the standard	IEC NBN EN 60884-1 Plugs and socket-outlets for household and similar purposes - Part 1: General requirements . EXCL. § 11.5; 12.2; 14.23.1; 20; 21
Coduit systems for cable management - Part 1:General requirments	Tests electrical safety as detailed in the standard	NBN EN 61386-1 Coduit systems for cable management - Part 1:General requirments
Coduit systems for cable management - Part 21:Particular requirments - Rigid conduit systems	Tests electrical safety as detailed in the standard	NBN EN 61386-21 Coduit systems for cable management - Part 21:Particular requirments - Rigid conduit systems
Coduit systems for cable management - Part 22:Particular requirments - Pliable conduit systems	Tests electrical safety as detailed in the standard	NBN EN 61386-22 Coduit systems for cable management - Part 22:Particular requirments - Pliable conduit systems

Product/Object	Parameter determined	Reference
Luminaires – General requirements and tests	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-1 Luminaires – Part 1: General requirements and tests EXCLTests: Protective measure against UV radiation; Rough service luminaires (Vibration test)
Luminaires - Fixed general purpose luminaires	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-1 Luminaires - Part 2: Particular requirements Section 1: Fixed general purpose luminaires
Luminaires - Recessed luminaires	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-2 Luminaires - Part 2 - Particular requirements Section 2: Recessed luminaires
Luminaires - Luminaires for road and street lighting	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-3 Luminaires - Part 2 - Particular requirements Section 3: Luminaires for road and street lighting
Luminaires - Portable general purpose luminaires	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-4 Luminaires - Part 2 - Particular requirements Section 4: Portable general purpose luminaires
Luminaires - Floodlights	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-5 Luminaires - Part 2 - Particular requirements Section 5: Floodlights
Luminaires - Luminaires with built-in transformers for filament lamps	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-6 Luminaires - Part 2: Particular requirements Section 6: Luminaires with built-in transformers for filament lamps
Luminaires – Portable luminaires for garden use	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-7 Luminaires – Part 2 – Particular requirements Section 7: Portable luminaires for garden use
Luminaires - Portable luminaires for children	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-10 Luminaires - Part 2 - Particular requirements Section 10: Portable luminaires for children EXCLTests: Burning behavior for pile surface or textile surface
Luminaires - Aquarium luminaires	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-11 Luminaires - Part 2: Particular requirements Section 11: Aquarium luminaires

Product/Object	Parameter determined	Reference
Luminaires - Mains socket-outlet mounted nightlights	Tests electrical safety as detailed in the standard	NBN EN 60598-2-12 Luminaires - Part 2 - Particular requirements Section 12: Mains socket-outlet mounted nightlights
Luminaires - Ground recessed luminaires	Tests electrical safety as detailed in the standard	NBN EN 60598-2-13 Luminaires - Part 2 - Particular requirements Section 13: Ground recessed luminaires
Luminaires - Lighting chains	Tests electrical safety as detailed in the standard	IEC NBN EN 60598-2-20 Luminaires - Part 2 - Particular requirements Section 20: Lighting chains
Lamp controlgear - General and safety requirements	Tests electrical safety as detailed in the standard	61347-1 Lamp controlgear - Part 1: General and safety requirements
Lamp controlgear - Particular requirements for miscellaneous electronic circuits used with luminaires	Tests electrical safety as detailed in the standard	61347-2-11 Lamp controlgear - Part 2-11: Particular requirements for miscellaneous electronic circuits used with luminaires
Lamp controlgear - Particular requirements for d.c. Or a.c. Supplied electronic controlgear for LED modules	Tests electrical safety as detailed in the standard	61347-2-13 Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements	Tests electrical safety as detailed in the standard	NBN EN UL CSA 61010-1 Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements
Medical electrical equipment - General requirements for basic and essential performance	Tests electrical safety as detailed in the standard	IEC NBN EN 60601-1 CAN/CSA C22.2 N°60601-1 ANSI/AAMI ES 60601-1 Medical electrical equipment - Part 1: General requirements for basic and essential performance EXCLTests: § 25; 29; 36; 44

Product/Object	Parameter determined	Reference
Medical electrical equipment - Safety requirements for medical electrical systems	Tests electrical safety as detailed in the standard	IEC NBN EN 60601-1-1 Medical electrical equipment - Part 1-1: General requirements for safety - Collateral standard: Safety requirements for medical electrical systems
Medical electrical equipment - Particular requirements for basic safety and essential performance of surgical, cosmetic, therapeutic and diagnostic laser equipment	Tests electrical safety as detailed in the standard	IEC NBN EN 60601-2-22 Medical electrical equipment - Part 2-22: Particular requirements for basic safety and essential performance of surgical, cosmetic, therapeutic and diagnostic laser equipment
Medical electrical equipment - Particular requirements for the basic safety and essential performance of electrocardiographs	Tests electrical safety as detailed in the standard	NBN EN 60601-2-25 Medical electrical equipment - Part 2-25: Particular requirements for the basic safety and essential performance of electrocardiographs
Medical Electrical Equipment Particular Requirements for the basic safety and essential performance of electroencephalographs	Tests electrical safety as detailed in the standard	IEC NBN EN 60601-2-26 Medical Electrical Equipment Part 2-26: Particular Requirements for the basic safety and essential performance of electroencephalographs
Medical electrical equipment - Particular requirements for the basic safety and essential performance of electrocardiographic monitoring equipment	Tests electrical safety as detailed in the standard	IEC NBN EN 60601-2-27 Medical electrical equipment - Part 2-27: Particular requirements for the basic safety and essential performance of electrocardiographic monitoring equipment

Product/Object	Parameter determined	Reference
Safety of information technology equipment	Tests electrical safety as detailed in the standard	IEC NBN EN 60950 Safety of information technology equipment EXCLTests: § 2.10.6.6; 4.3.12; 4.3.13; 4.7.3; 4.2.8; 7
Information technology equipment - Safety - Part 1: General requirements	Tests electrical safety as detailed in the standard	IEC NBN EN UL CAN/CSA C22.2 60950-1 Information technology equipment - Safety - Part 1: General requirements EXCLTests: 4.2.8; 4.3.12; 4.3.13; 4.6.2; Materials, tests see Annex A
Uninterruptible power systems (UPS) - General and safety requirements for UPS	Tests electrical safety as detailed in the standard	IEC 62040-1 Uninterruptible power systems (UPS) - Part 1: General and safety requirements for UPS
Uninterruptible power systems (UPS) - General and safety requirements for UPS used in operator access areas	Tests electrical safety as detailed in the standard	IEC NBN EN 62040-1-1 Uninterruptible power systems (UPS) - Part 1-1: General and safety requirements for UPS used in operator access areas
Uninterruptible power systems (UPS) - General and safety requirements for UPS used in restricted access locations	Tests electrical safety as detailed in the standard	IEC NBN EN 62040-1-2 Uninterruptible power systems (UPS) - Part 1-2: General and safety requirements for UPS used in restricted access locations
Low-voltage switchgear and controlgear assemblies - General rules	Tests electrical safety as detailed in the standard	IEC NBN EN 61439-1 Low-voltage switchgear and controlgear assemblies - Part 1: General rules Only Clauses § 8.2.1; 8.2.2; 8.2.3; 8.3.1; 8.3;2; 8.3.3; 8.4

Product/Object	Parameter determined	Reference
Low-voltage switchgear and controlgear assemblies Power switchgear and controlgear assemblies	Tests electrical safety as detailed in the standard	IEC NBN EN 61439-2 Low-voltage switchgear and controlgear assemblies - Part 2: Power switchgear and controlgear assemblies Only Clauses § 8
Low-voltage switchgear and controlgear assemblies Particular requirements for low-voltage switchgear and controlgear assemblies intended to be installed in places where unskilled persons have access for their use - Distribution boards	Tests electrical safety as detailed in the standard	IEC NBN EN 61439-3 Low-voltage switchgear and controlgear assemblies - Part 3: Particular requirements for low-voltage switchgear and controlgear assemblies intended to be installed in places where unskilled persons have access for their use - Only § 8
Safety of power transformers, power supplies, reactors and similar products - General requirements and tests	Tests electrical safety as detailed in the standard	IEC NBN EN 61558-1 Safety of power transformers, power supplies, reactors and similar products - Part 1: General requirements and tests
Safety of power transformers, power supply units and similar - Particular requirements for separating transformers for general use	Tests electrical safety as detailed in the standard	NBN EN 61558-2-1 Safety of power transformers, power supply units and similar - Part 2.1: Particular requirements for separating transformers for general use

Product/Object	Parameter determined	Reference
Safety of power transformers, power supply units and similar - Particular requirements and tests for control transformers and power supplies incorporating control transformers.	Tests electrical safety as detailed in the standard	NBN EN 61558-2-2 Safety of power transformers, power supply units and similar - Part 2.2: Particular requirements and tests for control transformers and power supplies incorporating control transformers.
Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V - Particular requirements and tests for isolating transformers and power supply units incorporating isolating transformers	Tests electrical safety as detailed in the standard	IEC NBN EN 61558-2-4 Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V - Part 2-4: Particular requirements and tests for isolating transformers and power supply units incorporating isolating transf
Safety of power transformers, power supply units and similar - Particular requirements for shaver transformers and shaver supply units.	Tests electrical safety as detailed in the standard	NBN EN 61558-2-5 Safety of power transformers, power supply units and similar - Part 2.5: Particular requirements for shaver transformers and shaver supply units.

Product/Object	Parameter determined	Reference
Safety of power transformers, power supply units and similar - Particular requirements for safety isolating transformers for general use	Tests electrical safety as detailed in the standard	IEC NBN EN 61558-2-6 Safety of power transformers, power supply units and similar - Part 2 Particular requirements for safety isolating transformers for general use
Safety of power transformers, power supply units and similar devices - Particular requirements for auto-transformers for general use.	Tests electrical safety as detailed in the standard	NBN EN 61558-2-13 Safety of power transformers, power supply units and similar devices - Part 2-13: Particular requirements for auto-transformers for general use.
Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V - Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units	Tests electrical safety as detailed in the standard	IEC 61558-2-16 Safety of transformers, reactors, power supply units and similar products for voltages up to 1 100 V - Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units
Safety of power transformers, power supply units and similar -	Tests electrical safety as detailed in the standard	NBN EN 61558-2-17 Safety of power transformers, power supply units and similar - Part 2.17:
Electical Cables	Tests electrical safety as detailed in the standard	IEC NBN EN UL CSA 60065 Audio, video and similar electronic apparatus - Safety requirements EXCLTests: Annex A: 8.18; 7; 6.1

	Product/Object	Parameter determined	Reference
	GENERIC Tests		
G60525/W	All, except power cables and cords	Resistance to harmful ingress of water (IPx1-IPx8) Degree protection against water// max. LenghtXHeightXWidth : IPX1&2 1mx1mx1m ; IPX3&4 1mx1mx1m ; IPX5&6 2mx1,5mx2m ; IPX7&8 Diam 0,5Mx1,3mlenght	IEC / EN / NBN EN 60529
G60525/O	All, except power cables and cords	Degree of protection against access to hazardous parts and against solid foreign objects (IP1x- IP6x) Degree protection // max. LenghtXDiam : IP5X&6x 1,2mx07m	IEC / EN / NBN EN 60529
G60695.1 1.5	All, except power cables and cords and Electrical equipt for medical use	Fire hazard testing; Needle Flame	IEC / EN / NBN EN 60695-11-5
G60695.1 1.4	Household, Electrical equipt for medical use, UPS, IT & office equipment, Measuring instruments, Electronic appliances	Fire hazard testing. Test flames - 50W	IEC / EN / NBN EN 60695-11-10
G60695.1 1.3	IT & office equipment	Fire hazard testing. Test flames - 500W	IEC / EN / NBN EN 60695-11-20
G60695.1 1.2	Power cables and cords	Fire hazard testing. Test flames - 1000W	IEC / EN / NBN EN 60695-2-4
G60695.2. 10	All, except power cables and cords and equipt for medical use.	Fires hazard testing. Glow wire	IEC / EN / NBN EN 60695-2-10
G60695.1 0.2	All, except power cables and cords	Fire hazard testing; Ball pressure testing	IEC / EN / NBN EN 60695-10-2
G62262	All, except power cables and cords	Impact test (Code IK01 to IK10)	IEC / EN / NBN EN 62262



Signatory to EA, ILAC and IAF
Multilateral Agreements

Organisme belge d'Accréditation
Belgische Accreditatie-instelling
Belgian Accreditation Body

Annexe au certificat d'accréditation
Bijlage bij accreditatie-certificaat
Annex to the accreditation certificate
Beilage zur Akkreditierungszertifikat

226-TEST

NBN EN ISO/IEC 17025:2005

Version/Versie/Version/Fassung	7
Date d'émission / Uitgiftedatum / Issue date / Ausgabedatum:	2016-05-19
Date limite de validité / Geldigheidsdatum / Validity date / Gültigkeitsdatum:	2021-05-27

Nicole Meurée-Vanlaethem
La Présidente du Bureau d'Accréditation
Voorzitster van het Accreditatiebureau
Chair of the Accreditation Board
Vorsitzende des Akkreditierungsbüro

**L'accréditation est délivrée à/ De accreditatie werd uitgereikt aan/
The accreditation is granted to/ Die akkreditierung wurde erteilt für:**

LABORATOIRE DE PHOTOMETRIE DE R-TECH
Rue de Mons, 3
4000 LIEGE

Secrétariat :
**Service public fédéral Economie,
P.M.E., Classes moyennes et Energie**
Direction générale de la Qualité et de la Sécurité
Division Qualité et Innovation
Bd du Roi Albert II 16
1000 Bruxelles
Website : <http://economie.fgov.be>
Numéro d'entreprise : 0314.595.348

Accréditation BELAC Accreditation

Tel.: +32 2 277 54 34
Fax: +32 2 277 54 41
Internet: <http://belac.fgov.be>
E-mail: Belac@economie.fgov.be

Secretariaat:
**Federale Overheidsdienst Economie,
K.M.O., Middenstand en Energie**
Algemene Directie Kwaliteit en Veiligheid
Afdeling Kwaliteit en Innovatie
Koning Albert II-laan 16
1000 Brussel
Website: <http://economie.fgov.be>
Ondernemingsnummer: 0314.595.348

.be

BELAC

BELAC

BELAC

EG-0030

Code essai	Echantillons <i>Samples</i>	Caractéristique mesurée Gamme de mesure <i>Measurement Measurement range</i>	Description méthode d'essai Equipement <i>Testing Methodology Description Equipment</i>
Test Code			
PTP-01	Lampes à incandescence ou à décharge pour luminaires. <i>Incandescent or high intensity discharge lamp for luminaires.</i>	Flux lumineux exprimé en lumen (lm) <i>Luminous flux in lumen (lm)</i>	Mesure du flux lumineux en sphère d'Ulbricht selon la norme de référence EN 13032-1 § 6.1.2. Pour toutes lampes sauf les LED (Solid State Lighting) <i>Luminous flux measurement with Ulbricht's sphere according to EN 13032 § 6.1.2 Standard for all light sources except LED (Solid State Lighting)</i>
PTP-01	Sources lumineuses de type LED pour luminaires. <i>Led light source for luminaires.</i>	Flux lumineux exprimé en lumen (lm) <i>Luminous flux in lumen (lm)</i>	Mesure du flux lumineux en sphère d'Ulbricht selon la norme de référence EN 13032-1 § 6.1.2 et IES LM79-08. Pour LEDs (Solid State Lighting) <i>Luminous flux measurement with Ulbricht's sphere according to EN 13032 § 6.1.2 and IES LM79-08 Standard. For LED (Solid State Lighting)</i>
PTP-02	Luminaires pour lampes à incandescence ou à décharge <i>Luminaires for incandescent, HID lamp</i>	Distribution des intensités lumineuses exprimées en candela (cd) <i>Light distribution in candela (cd)</i>	Relevé photométrique au goniophotomètre selon la norme de référence EN 13032-1 et CIE 121-1996 Pour toutes lampes sauf les LED (Solid State Lighting) <i>Light distribution measurement with gonio according to EN 13032-1 and CIE 121-1996 Standard for all light sources except LED (Solid State Lighting)</i>
PTP-02	Luminaires à sources lumineuses de type LED pour luminaires. <i>Luminaires for LED light sources.</i>	Distribution des intensités lumineuses exprimées en candela (cd) <i>Light distribution in candela (cd)</i>	Relevé photométrique au goniophotomètre selon la norme de référence EN 13032-1, CIE 121-1996 et IES LM79-08 Pour les LED (Solid State Lighting) <i>Light distribution measurement with gonio according to EN 13032-1, CIE 121-1996 and IES LM79-08 Standard. For LED (Solid State Lighting)</i>

Code essai Test Code	Echantillons Samples	Caractéristique mesurée Gamme de mesure Measurement Measurement range	Description méthode d'essai Equiptement Testing Methodology Description Equipment
PTP-09	Lampes à incandescence ou à décharge pour luminaires ou luminaires associés. <i>Incandescent or high intensity discharge lamp for luminaires or associated luminaires.</i>	Données colorimétriques : IRC, T° de couleur, coordonnées trichromatiques, données spectrales (domaine du visible) <i>Colorimetric values, CRI, CCT, tristimulus values, spectrum (visible range)</i>	Relevé colorimétrique en sphère via spectromètre selon la norme de référence EN 13032-1 et CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) Pour équipements lumineux sauf ceux incluant des LED (Solid State Lighting) <i>Colorimetric measurement with spectrometric sphere to EN 13032-1 and CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) Standard for all light equipment except LED (Solid State Lighting)</i>
PTP-09	Sources lumineuses de type LED pour luminaires ou luminaires associés. <i>Led light source for luminaires or associated luminaires.</i>	Données colorimétriques : IRC, T° de couleur, coordonnées trichromatiques, données spectrales (domaine du visible) <i>Colorimetric values, CRI, CCT, tristimulus values, spectrum (visible range)</i>	Relevé colorimétrique en sphère et spectromètre selon la norme de référence EN 13032-1 et CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) et IES LM79-08 pour équipements lumineux à LED (Solid State Lighting) <i>Colorimetric measurement with spectrometric sphere according to EN 13032-1 et CIE 13.3, 15, 63, 121-1996 S014 (1,2 et 3) and IES LM79-08 Standard. For LED light equipment (Solid State Lighting)</i>



Organisme belge d'Accréditation
Belgische Accreditatieinstelling
Belgische Akkreditierungsstelle
Belgian Accreditation Body

Signatory to EA, ILAC and IAF
Multilateral Agreements

Accreditation Certificate No. 226-TEST

In compliance with the provisions of the Royal Decree of 31 January 2006 setting up BELAC, the Accreditation Board hereby declares, that the test laboratory

LABORATOIRE DE PHOTOMETRIE DE R-TECH

Rue de Mons, 3
4000 LIEGE - Belgium

has the competence to perform the tests as described in the annex which is an integral part of the present certificate, in accordance with the requirements of the standard NBN EN ISO/IEC 17025:2005. The present accreditation is the subject of regular surveillance in order to confirm the compliance with the accreditation conditions.

The Chair of the Accreditation Board BELAC,

Nicole MEURÉE-VANLAETHEM

Issue date : 2016-05-19

Validity date : 2021-05-27

Original version of this certificate is in French.



Certificate of Acceptance

To participate
in the IECEE CB Scheme – IEC System of Conformity Assessment Schemes for Electrotechnical
Equipment and Components (IECEE)

SGS Belgium N.V. - Division SGS-CEBEC

**Business Riverside Park
Avenue Internationalelaan 55 Build. D
BE-1070 BRUSSEL
Belgium**

has been assessed and determined to fully comply with the requirements of ISO/IEC 17065: 2012,
The Basic Rules, IECEE 01: 2016-10 and Rules of Procedure IECEE 02: 2017-06, and the relevant IECEE CB-Scheme
Operational Documents.

SGS Belgium N.V. - Division SGS-CEBEC

is therefore entitled to operate as an Issuing and Recognising National Certification Body (NCB)
within the IECEE CB Scheme for the Scope (Product Category(ies) and Standard(s)) as listed in the relevant part of the
IECEE Web Site at www.iecee.org, and is subject to all other terms as set forth in the IECEE Basic Rules
and Rules of Procedure.

The IECEE membership status of this NCB can be verified on the aforementioned site.



A blue ink signature of Kerry McManama.

Date of Issue: 2017-09-01
CB002

Kerry McManama
IECEE Executive Secretary

SUPERVISED MANUFACTURER'S TESTING

Report nr. CEBEC-002B

SGS Belgium NV

Division SGS CEBEC

Business Riverside Park
Bld Internationalelaan, 55 Build. D
B-1070 Brussels - Belgium

Acting as national Certification Body participation in the Certification Bodies Scheme (CB Scheme) and the European Certification System (ECS) has recognized the following laboratory as

SMT laboratory nr. CEBEC-002

Operating in the framework of the IECEE CB-scheme and ECS certification system (CCA and ENEC).

Approved laboratory, name and address:

Service Laboratoire
R-TECH S.A.
Rue de Mons, 3
BE-4000 LIEGE

Manufacturing factories:

European Factories
Belonging to the
Schröder Group G.I.E.

Products covered by the contract:

<u>Category</u>	<u>Standards</u>	<u>Products</u>
LITE	IEC/EN 60598-1 IEC/EN 60598-2-1 IEC/EN 60598-2-3 IEC/EN 60598-2-5 IEC/EN 60598-2-13	Luminaire Fixed general purpose luminaire Luminaire for road and street lighting Floodlights Ground recessed luminaire

Brussels, 2013-02-01


ir. C. Lana,
Certification Manager



SGS Belgium NV

Division SGS CEBEC Bld Internationalelaan, 55 Build. D B-1070 Bruxelles/Brussel tel. +32 (0) 556 00 20 fax: +32 (0) 556 00 36 www.cebex.sgs.com
Siège Social/Maatschappelijke Zetel: SGS House Noorderlaan 87 B-2030 Antwerpen

Member of the SGS Group (Société Générale de Surveillance)

RPM/RPR Anvers/Antwerpen TVA/BTW BE 404.882.750 Dexia 550-3560000-93



Certificate of Acceptance

To participate
in the IECEE CB Scheme – IEC System of Conformity Assessment Schemes for Electrotechnical
Equipment and Components (IECEE)

SGS Belgium NV – Division SGS CEBEC

**Riverside Business Park
Bld. Internationalelaan 55 Build. B1
BE-1070 Brussels
Belgium**

has been assessed and determined to fully comply with the requirements of ISO/IEC 17025: 2005-05,
The Basic Rules, IECEE 01: 2016-10 and Rules of Procedure IECEE 02: 2017-06, and the relevant IECEE CB-Scheme
Operational Documents.

SGS Belgium NV – Division SGS CEBEC

is therefore entitled to operate as a CB Testing Laboratory (CBTL) under the responsibility of **SGS Belgium N.V. - Division
SGS-CEBEC** as National Certification Body (NCB) and to carry out testing within the IECEE CB Scheme for the Scope
(Product Category(ies) and Standard(s)) as listed in the relevant part of the IECEE Web Site at www.iecee.org, and
is subject to all other terms as set forth in the IECEE Basic Rules and Rules of Procedure

The IECEE membership status of this CBTL can be verified on the aforementioned site.

Date of Issue 2017-09-01
TL173



A blue ink signature of Kerry McManama, written in a cursive style.

Kerry McManama
IECEE Executive Secretary



Zakłady Badań i Atestacji "ZETOM"
im. Prof. F. Stauba w Katowicach sp. z o.o.
Institutions for Research and Certification "ZETOM" Ltd.
ul. Ks. Bpa H. Bednorza 17, 40-384 Katowice; tel. 032 2569257 e-mail: zetom@zetomkatowice.com.pl

Laboratorium Badawcze i Wzorcujące

Laboratorium badawcze akredytowane przez
Polskie Centrum Akredytacji, sygnatariusza porozumień EA MLA i ILAC MRA
dotyczących wzajemnego uznawania świadectw wzorcowania.
Nr akredytacji AB 024



AB 024



TEST REPORT

Ref. no. B/2017/158 dated 12/06/2017

Subject: Examination of the degree of protection IK09 for the URBINO street lighting fixture.

Tested for:	LUG Light Factory Sp. z o.o.		
	ul. Gorzowska 11		
	65-127 Zielona Góra		
Tested at:	Institutes for Research and Certification "ZETOM" Katowice		
	Testing and Calibration Laboratory "ZETOM" Katowice.		
Customer Order Index:	Order (e-mail)	dated:	26/05/2017
Laboratory Log Reference No. of Order: B/2017/144			
Test start date:	06/06/2017	Test end date:	08/06/2017
This Test Report contains:	5 pages		
3 copies hereof are issued to the following recipients:			
	1. LUG Light Factory Sp. z o.o.		
	2. LUG Light Factory Sp. z o.o.		
	3. LT		
Test supervisor:	Katarzyna Hadam Ph.D.		
Tested and measured by:	Piotr Jureczko, MSc Eng.	Lab Section: WE	
	Kamil Długajczyk	Lab Section: WE	
Test Report prepared by:	Kamil Długajczyk		

Authorised by:

Z-ca Kierownika
Zespołu ds. Badań

mgr inż. Piotr Jureczko



Approved by:

p.o. Z-ca Dyrektora
ds. Badań i Wzorcowania
Kierownik Laboratorium
Badawczego i Wzorcującego

dr Katarzyna Hadam

Zakłady Badań i Atestacji „ZETOM”
im. Prof. F. Stauba w Katowicach sp. z o.o.
Institutions for Research and Certification “ZETOM” Ltd.
EU Notified Body no. 1436,
for the following Directives: Construction, Low Voltage & Machinery
ul. Ks. Bpa H. Bednorza 17; 40-384 Katowice, Poland
Phone: 0048(032) 2569-257, 0048(032) 2569-273, 0048(032) 2569-353

PROVISIONS

A. Obligatory:

1. The Test Report shall be property of the Customer who has ordered to have the test done.
2. The Test Report and all information contained therein shall only be used with the consent of the Test Report owner.
3. This Test Report shall only be used in full.
4. All test and measurement reports listed herein refer to the test objects only and shall not be construed as a quality approval thereof.
5. The work covered herein has been carried out according to its Work Plan and in line with the Management System requirements specified in the Testing and Calibration Laboratory Quality Manual.
6. All reference to this Test Report shall be made with the following statement (or its equivalent in meaning):

Tested by the Testing and Calibration Laboratory "ZETOM" in Katowice, a unit accredited by the Polish Centre for Accreditation seated in Warsaw within the scope of the Certificate No. AB 024 Annex.

B. Complementary (listed in this Test Report) Section

C. Anomalies (listed in this Test Report) Section

When using the contents of this Test Report, the owner hereof shall state that they use the results produced by the Testing and Calibration Laboratory at the Institutes for Research and Certification "ZETOM" in Katowice, accredited by the Polish Centre for Accreditation in Warsaw.

1. BASIS OF TESTING

1.1. Customer's document title: Order LUG Light Factory Sp. z o.o. to do the research in the Research and Calibration Laboratory "ZETOM" Katowice

1.2. Customer's document identification: Order (e-mail)

dated: 26/05/2017

1.3. Subject: Performance test IK09 degree for lighting fixture

2. TESTING OBJECTIVE Verification of properties and characteristics according to PN-EN 50102:2001

3. TEST OBJECT

3.1. Nazwa przedmiotu: URBINO street lighting luminaire

3.2. Customer: LUG Light Factory Sp. z o.o.

3.3. Supplier/Manufacturer: LUG Light Factory Sp. z o.o.

3.4. Place of production: ul. Gorzowska 11; 65-127 Zielona Góra

3.5. Method of object delivery for testing: delivered by the Customer

3.6. Objects collected at: LUG Light Factory Sp. z o.o.

3.7. Collect Report: -

3.8. Date of receiving the test objects: 31/05/2017

3.9. Collector's additional labelling applied: -

3.10. Object packaging: cardboard box

3.11. In-laboratory labelling of objects:

Object labelling in prior of delivery to the Lab	Labelling of objects made at the Lab ¹⁾	Notes
-	2017/144	-
1) Remains the Sample Index		

4. TESTING PROGRAM

The Testing Program includes the testing's cope of the following reference standards:

- PN-EN 50102:2001 "Degree of protection against external mechanical impacts provided by enclosures of electrical equipment (IK code)".

5. Results

5.1 Results of the IK degree of protection provided by the URBINO street lighting fixture

Degree of protection IK09
The test was done by hitting a 5.0 kg hammer with an energy equivalent to 10 J impact on the outside of the luminaire. Three hits in different lighting fixtures (total with a translucent glass shade) did not cause distortion of the housing body or cracks in the glass cover. Proper protection provided by the luminaire is ensured.

Photos of the lighting fixture tested:





ELECTROTECHNICAL TESTING INSTITUTE
Pod Lisem 129
171 02 Praha 8 - Troja

No. of pages: 4
No. of annexes/No. of an. pages: 0/0

No. of the Test Report: 604927-01/01

Issued: 8. 11. 2016



TEST REPORT

Name of product: LED lamp
Type of product: URBINO LED, URBANO LED
Ratings: -
Serial number: -
Manufacturer: LUG Light Factory Sp. z o.o.,
ul. Gorzowska 11, 65-127 Zielona Góra,
the Republic of Poland
Production site: LUG Light Factory Sp. z o.o.,
ul. Gorzowska 11, 65-127 Zielona Góra,
the Republic of Poland
Ordering firm: LUG Light Factory Sp. z o.o.,
ul. Gorzowska 11, 65-127 Zielona Góra,
the Republic of Poland
Number of tested samples: 2
Samples submitted on: 24. 10. 2016
Location of testing: EZÚ
Tested from 2. 11. 2016 **through** 4. 11. 2016
Other data: -
The product was tested according to: ČSN EN 60068-2-6 ed.2:08, idt EN 60068-2-6:08
idt. IEC 60068-2-6:07

Compiled by: Jiří Bažant



Approved by: Jarmil Mikulík
Testing laboratory manager

Test results stated in the test report apply only to the tested subject and unless specified otherwise in the test report, the tests were performed using the method and under the conditions determined in the test regulations, technical norm, instructions for use and information provided by the manufacturer on the tested subject and using accessories required by the manufacturer.
Without written consent, this report must not be reproduced in any other way than as a whole.

SPECIMEN DESCRIPTION

There were submitted LED lamps for testing, type URBINO LED and URBANO LED.

TESTING

The tests were performed according to ČSN EN 60068-2-6 ed.2:2008 (idt EN 60068-2-6:08, idt. IEC 60068-2-6:2007), Vibration test with parameters according to ČSN EN 60598-1 ed. 6:2015 (mod IEC 60598-1:2014).

Testing equipment

Vibration testing system LDS - V830-335 SPA8-16K
Control system PUMA, testing program SINUS
Acceleration sensor 353B33, manufacturer PCB

inv. No. 110128/1-5
inv. No. 110148
inv. No. 551333

Parameters of test

Frequency range	10 Hz, 55 Hz, 10 Hz
Amplitude	0,35 mm
Sweep rate	1 octave / min
Duration	30 min
Direction	the most onerous direction

Specimen 1




clamping of specimen



functional test

Specimen 2

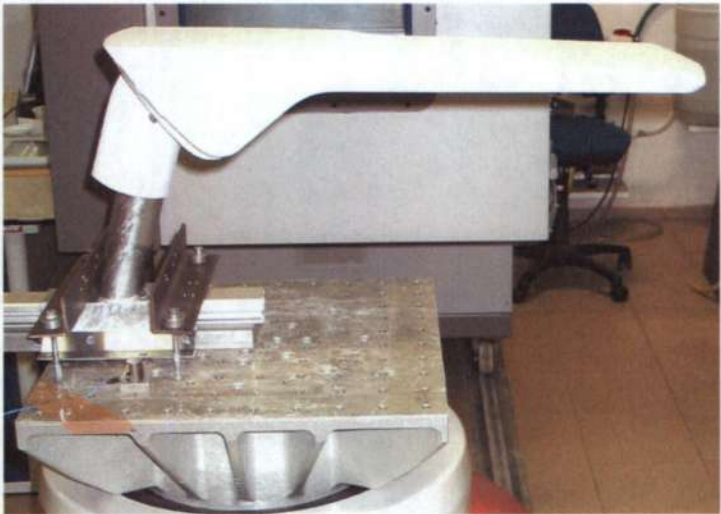

clamping of specimen




functional test

Record of test courses - Vibration test (operation)


Sweep #: 12.2000
Sweeps Remaining: 0.0000 **LUG 1** **Date: 11/03/16**

CTRL: 0.2760 g
Frequency: 14.0388

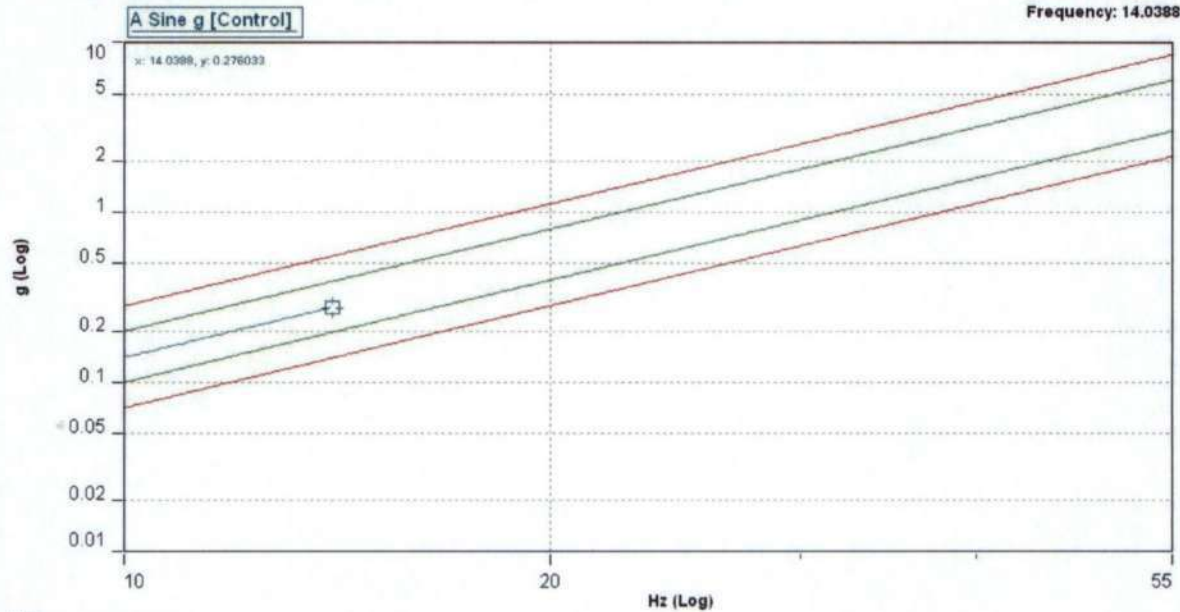

Sweep #: 1.9695
Sweeps Remaining: 10.2305 **LUG 2** **Date: 11/04/16**


CTRL: 0.1578 g
Frequency: 10.5479

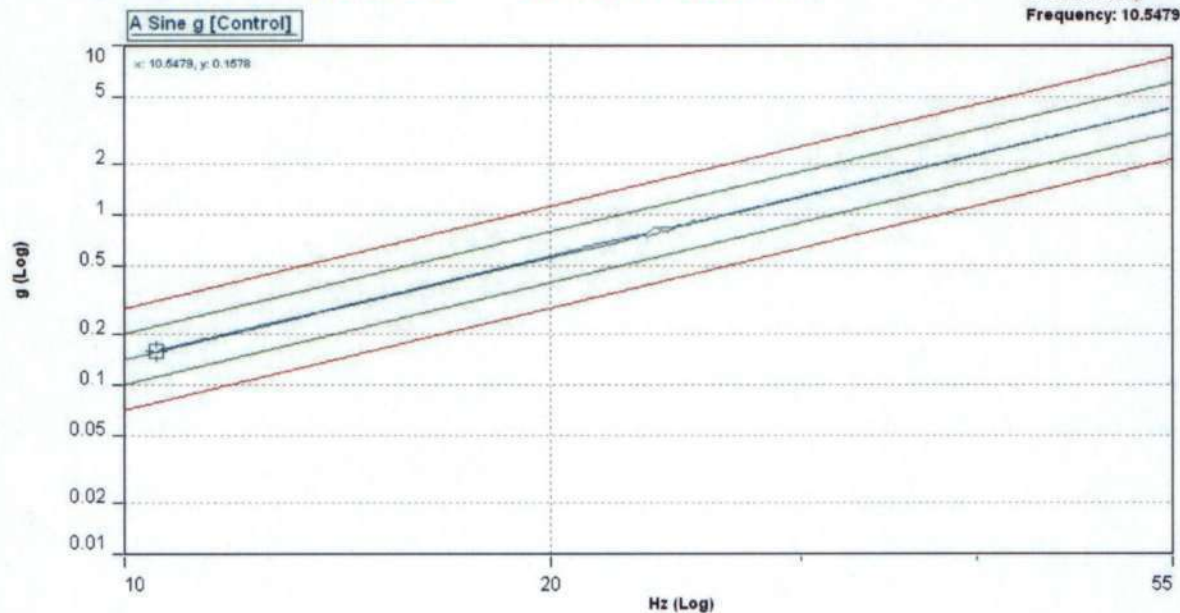

TEST RESULT

After the tests there were detected no visible mechanical damage on the specimen, the test did not affected the specimen's functionality.


Tested by: J. Bažant

**130222.5L041.041****URBINO LED 55W 6150lm 4000K IP66 05 - для внутриквартальных дорог серый I**

Светодиодный светильник для уличного освещения, выполненный в современном дизайне.

**МЕХАНИЧЕСКИЕ
ХАРАКТЕРИСТИКИ**

Монтаж: на столбе $\varnothing 60/48$ мм, на столбе $\varnothing 76$ мм - модификация .829, на кронштейне $\varnothing 60/48$ мм, на кронштейне $\varnothing 76$ мм - модификация .829

Корпус: литый под давлением алюминий

Боковая площадь, подверженная воздействию ветра:
0.039 м²

Цвет: серый

RAL: 7035

Диапазон рабочих температур [°C]: -40 ... +55

**ЭЛЕКТРИЧЕСКИЕ
ХАРАКТЕРИСТИКИ**

Эффективность драйвера: >95%

Напряжение питания: 220-240V 50/60Hz

Источник света в комплекте: Да

Выходной ток [mA]: 700

Тип оснащения: ED

Источник света: LED

Электрическое подключение: кабель max 3x2,5 mm²

**ОПТИЧЕСКИЕ
ХАРАКТЕРИСТИКИ**

Тип освещения: прямой

Тип оптики: 05 - для внутриквартальных дорог

Плафон: закаленное стекло

CRI/Ra: >70

Световой поток LED [лм]: 7150

Световой поток светильника [лм]: 6150

Цветовая температура [K]: 4000

ULOR / DLOR: 0% / 100%

ОБЩИЕ ДАННЫЕ

Расчетный срок службы (L80B10): 100 000 h

Доступно под заказ: DALI, DIM 1..10V, LLOC, сумеречный датчик, ножевой разъем, защита от перенапряжения 10kV, термозащита, NTC

Дополнительная информация: Регулировка угла наклона скачка: от -15° до +15° (каждые 5°)

Дополнительное оборудование: дополнительная защита от коррозии (расширение индекса: .985), доступ к ячейке драйвера без использования инструментов (расширение индекса: .825), светильник с держателем для крепления на колонке $\varnothing 76$ мм (расширение индекса: .829)

Примечания: полюс и стрела не являются частью светильника

Гарантия: 5 лет

Применение: скоростные дороги, муниципальные дороги, городские дороги, дороги в границах жилых районов, пешеходные переходы, освещение территорий, прогулочные аллеи, прогулочные зоны, велосипедные дорожки



Код	Класс защиты	Тип оптики	Мощность светильника [Вт]	Световой поток светильника [лм]	Эффективность [lm/W]	Цветовая температура [K]	CRI/Ra	Диапазон рабочих температур [°C]
-----	--------------	------------	---------------------------	---------------------------------	----------------------	--------------------------	--------	----------------------------------

Обратите внимание, что стандартный светильник не предназначен для использования в среде с повышенной коррозионной категорией. Использование светильника для работы в среде, для которой требуется дополнительная защита от коррозии, требует использования индекса с расширением .985 (по запросу).

Чтобы применить светильник в агрессивной среде, например, с повышенной концентрацией серы, соли или других агрессивных веществ, необходима консультация с Технической подготовкой филиала LUG.

Толерантность светового потока +/- 10%.


Допуск мощности +/- 5%.

Световой поток, распределение силы света и эффективность светотдачи были исследованы согласно нормы EN ISO 17025:2005 для серии норм EN13032, а так же нормы LM-79.

Актуальная информация о продукте, а так же Общие условия гарантии доступны на нашем сайте www.luglightfactory.ru

130222.5L041.041 I 05 - для 55 6150 112 4000 >70 -40 ... +55
внутриквартальных дорог

Код	Размеры [mm] L W H	Количество на паллете	Количество в упаковке	Вес нетто [кг]
130222.5L041.041	550 250 100	20	1	6,8

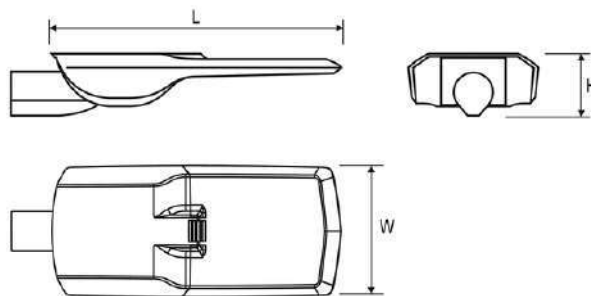

ACCESSORIES



☐ 150170.00818
☒ 150173.00906

Настенный кронштейн Ø60мм

Обратите внимание, что стандартный светильник не предназначен для использования в среде с повышенной коррозионной категорией. Использование светильника для работы в среде, для которой требуется дополнительная защита от коррозии, требует использования индекса с расширением .985 (по запросу).


Чтобы применить светильник в агрессивной среде, например, с повышенной концентрацией серы, соли или других агрессивных веществ, необходима консультация с Технической подготовкой филиала LUG.

Толерантность светового потока +/- 10%.

Допуск мощности +/- 5%.

Световой поток, распределение силы света и эффективность светотдачи были исследованы согласно нормы EN ISO 17025:2005 для серии норм EN13032, а так же нормы LM-79.

Актуальная информация о продукте, а так же Общие условия гарантии доступны на нашем сайте www.luglightfactory.ru

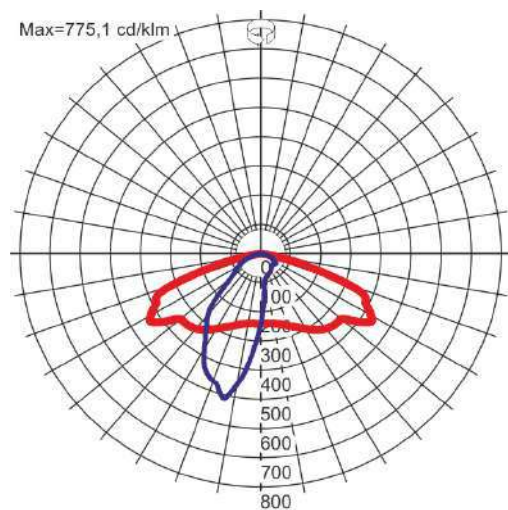ДРУГИЕ ФОТОГРАФИИ**КРИВЫЕ СВЕТОВОГО ПУЧКА****СПОСОБ ОСВЕЩЕНИЯ**

Обратите внимание, что стандартный светильник не предназначен для использования в среде с повышенной коррозионной категорией. Использование светильника для работы в среде, для которой требуется дополнительная защита от коррозии, требует использования индекса с расширением .985 (по запросу).

Чтобы применить светильник в агрессивной среде, например, с повышенной концентрацией серы, соли или других агрессивных веществ, необходима консультация с Технической подготовкой филиала LUG.

Толерантность светового потока +/- 10%.

Допуск мощности +/- 5%.

Световой поток, распределение силы света и эффективность светотдачи были исследованы согласно нормы EN ISO 17025:2005 для серии норм EN13032, а так же нормы LM-79.

Актуальная информация о продукте, а так же Общие условия гарантии доступны на нашем сайте www.luglightfactory.ru

ELEKTROTECHNICKÝ ZKUŠEBNÍ ÚSTAV



ELECTROTECHNICAL TESTING INSTITUTE - CZECH REPUBLIC
ELEKTROTECHNISCHE PRÜFANSTALT - TSCHHECHISCHE REPUBLIK
INSTITUT ELECTROTECHNIQUE D'ESSAIS - RÉPUBLIQUE TCHÈQUE
ЭЛЕКТРОТЕХНИЧЕСКИЙ ИСПЫТАТЕЛЬНЫЙ ИНСТИТУТ - ЧЕШСКАЯ РЕСПУБЛИКА

Pod Lisem 129, 171 02 Praha 8 - Troja

CERTIFIKÁT/CERTIFICATE

č./No.: 5160010

Objednatel/Ordering firm: LUG Light Factory Sp. z o.o.
ul. Gorzowska 11, 65-127 Zielona Góra, Polsko/Poland

Výrobce/Držitel licence//Manufacturer/Licence holder: LUG Light Factory Sp. z o.o.
ul. Gorzowska 11, 65-127 Zielona Góra, Polsko/Poland

Výrobek/Name of product: Fixed general purpose luminaires, road and street lighting

Obchodní značka/Trade mark:

Typ/Type of product: URBINO LED

Přesná specifikace výrobku je uvedena v příloze 1, která tvoří nedílnou součást tohoto certifikátu./Specification of the product is in the annex 1 that forms an integral part of this certificate.

Elektrotechnický zkušební ústav na základě splnění požadavků certifikačního schématu „ENEC“ uděluje licenci na užívání značky/Electrotechnical Testing Institute is granting according to the certification scheme „ENEC“ a licence for using the following mark



Touto značkou může být označován výrobek specifikovaný v tomto certifikátu po dobu platnosti níže uvedené smlouvy na užívání značky ENEC, při dodržení všech pravidel uvedených v této smlouvě./This mark may be used for the product specified in this certificate within validity of the Agreement on the use of the ENEC Mark by implementing all the rules stated in the Agreement.

Právo označovat výrobek výše uvedenou značkou je založeno na/The right to use the above mentioned mark for the product is based on:

- protokolu o zkouškách č./Test report No.: 601205-01/01 ze dne/of 13.06.2016

Vzorek zkoušeného výrobku je ve shodě s požadavky/A sample of the product was tested and found to be in conformity with:
EN 60598-1:15, EN 60598-2-3:03+A1:11

- provedení inspekce v místě výroby – viz inspekční zpráva č./inspection in the place of manufacture – see inspection report No.: 602766-01
- smlouvě na užívání značky ENEC mezi objednavatelem a Elektrotechnickým zkušebním ústavem č./the Agreement on the use of the ENEC Mark concluded between the ordering firm and the Electrotechnical Testing Institute No.: 601205

16.06.2016

V Praze dne/Prague

Mgr. Miroslav Sedláček
Vedoucí certifikačního orgánu/
Head of Certification Body



razítko/Stamp



• C E R / 5 1 6 0 0 1 0 •

601205-01

Příloha č. 1 licence č. 5160010 Annex No. 1 to Licence No. 5160010	
Držitel licence Licensee	LUG Light Factory Sp. Z o.o. Ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Výrobce Manufacturer	LUG Light Factory Sp. Z o.o. Ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Druh svítidla Kind of luminaire	Luminaires for road and street lighting Svítidla pro osvětlení cest a ulic
Typ svítidla Type reference	URBINO LED IP66
Obchodní značka Trade mark	
Protokol o zkoušce Test report	601205-01/01
Národní normy National standard(s)	ČSN EN 60598-1:2015 ČSN EN 60598-2-3:2003 +A1:2011
Evropské normy European standard(s)	EN 60598-1:2015 EN 60598-2-3:2003 +A1:2011
Jmenovité napětí Rated voltage	220÷240 V
Jmenovitý příkon a počet zdrojů Rated wattage and number of lamps	28, 37, 55, 84, 110 W
Typ světelného zdroje Lamp identification	LED modul LED module
Stupeň krytí Degree of protection	IP 66
Připojení napájení Supply connection	Svorkovnice Terminal block
Podkladová plocha Supporting surface	normálně hořlavý podklad normally flammable surface
Druh ochrany Protection against electric shock	Cl. I

Příloha č. 1 licence č. 5160010 Annex No. 1 to Licence No. 5160010			
EN 60 598-2-1			
Clause	Requirement – Test	Result – Remark	Verdict
	ANNEX ZB, SPECIAL NATIONAL CONDITIONS ENEC-301 – AMENDMENT B RESTRICTIONS		
(2.2)	Class 0 not accepted		OK
(3.3)	DK: power supply cord with label		---
	IT: warning label on Class 0 luminaire		---
(4.5.1)	DK, FR: socket-outlets		---
(5.2.1)	DK, FI, SE, GB: type of plug		---
ZC	ANNEX ZC, NATIONAL CONDITIONS ENEC-301 – AMENDMENT B RESTRICTIONS		
(13.3)	DK: needle-flame or glow-wire test		---
(13.3.2 + 13.3.3)	FR: glow-wire test		---
IEC 598-1	COMMON MODIFICATIONS		
3.2.12	NL - cable without mains plug		---
3.3.3.c	fixed wiring		---
4.11.6	Electro-mechanical contact systems		---
5.2.2	Type of cable		---
5.2.15	Colour code low voltage		---




ELEKTROTECHNICKÝ ZKUŠEBNÍ ÚSTAV



ELECTROTECHNICAL TESTING INSTITUTE - CZECH REPUBLIC
ELEKTROTECHNISCHE PRÜFANSTALT - TSCHIECHISCHE REPUBLIK
INSTITUT ELECTROTECHNIQUE D'ESSAIS - RÉPUBLIQUE TCHÈQUE
ЭЛЕКТРОТЕХНИЧЕСКИЙ ИСПЫТАТЕЛЬНЫЙ ИНСТИТУТ - ЧЕШСКАЯ РЕСПУБЛИКА

Pod Lisem 129, 171 02 Praha 8 - Troja

CERTIFIKÁT/CERTIFICATE

č./No.: 5160011

Objednatel/Ordering firm: LUG Light Factory Sp. z o.o.
ul. Gorzowska 11, 65-127 Zielona Góra, Polsko/Poland

Výrobce/Držitel licence//Manufacturer/Licence holder: LUG Light Factory Sp. z o.o.
ul. Gorzowska 11, 65-127 Zielona Góra, Polsko/Poland

Výrobek/Name of product: Fixed general purpose luminaires, road and street lighting

Obchodní značka/Trade mark:

Typ/Type of product: URBINO LED

Přesná specifikace výrobku je uvedena v příloze 1, která tvoří nedílnou součást tohoto certifikátu./Specification of the product is in the annex 1 that forms an integral part of this certificate.

Elektrotechnický zkušební ústav na základě splnění požadavků certifikačního schématu „ENEC“ uděluje licenci na užívání značky/Electrotechnical Testing Institute is granting according to the certification scheme „ENEC“ a licence for using the following mark



Touto značkou může být označován výrobek specifikovaný v tomto certifikátu po dobu platnosti níže uvedené smlouvy na užívání značky ENEC, při dodržení všech pravidel uvedených v této smlouvě./This mark may be used for the product specified in this certificate within validity of the Agreement on the use of the ENEC Mark by implementing all the rules stated in the Agreement.

Právo označovat výrobek výše uvedenou značkou je založeno na/The right to use the above mentioned mark for the product is based on:

- protokolu o zkouškách č./Test report No.: 601209-01/01 ze dne/of: 13.06.2016

Vzorek zkoušeného výrobku je ve shodě s požadavky/A sample of the product was tested and found to be in conformity with:
EN 60598-1:15, EN 60598-2-3:03+A1:11

- provedení inspekce v místě výroby - viz inspekční zpráva č./inspection in the place of manufacture - see inspection report No.: 602766-01
- smlouvě na užívání značky ENEC mezi objednavatelem a Elektrotechnickým zkušebním ústavem č./the Agreement on the use of the ENEC Mark concluded between the ordering firm and the Electrotechnical Testing Institute No.: 601209

16.06.2016

V Praze dne/Prague

Mgr. Miroslav Sedláček
Vedoucí certifikačního orgánu/
Head of Certification Body



razítko/Stamp



601209-01

Příloha č.1 licence č. 5160011 Annex No. 5160011 to Licence No. 5160011	
Držitel licence Licensee	LUG Light Factory Sp. Z o.o. Ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Výrobce Manufacturer	LUG Light Factory Sp. Z o.o. Ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Druh svítidla Kind of luminaire	Luminaires for road and street lighting Svítidla pro osvětlení cest a ulic
Typ svítidla Type reference	URBINO LED IP66
Obchodní značka Trade mark	
Protokol o zkoušce Test report	601209-01/01
Národní normy National standard(s)	ČSN EN 60598-1:2015 ČSN EN 60598-2-3:2003 +A1:2011
Evropské normy European standard(s)	EN 60598-1:2015 EN 60598-2-3:2003 +A1:2011
Jmenovité napětí Rated voltage	220+240 V
Jmenovitý příkon a počet zdrojů Rated wattage and number of lamps	28, 37, 55, 84, 110 W
Typ světelného zdroje Lamp identification	LED modul LED module
Stupeň krytí Degree of protection	IP 66
Připojení napájení Supply connection	Svorkovnice Terminal block
Podkladová plocha Supporting surface	normálně hořlavý podklad normally flammable surface
Druh ochrany Protection against electric shock	Cl. II

Příloha č.1 licence č. 5160011 Annex No. 5160011 to Licence No. 5160011			
EN 60 598-2-1			
Clause	Requirement – Test	Result – Remark	Verdict
	ANNEX ZB, SPECIAL NATIONAL CONDITIONS ENEC-301 – AMENDMENT B RESTRICTIONS		
(2.2)	Class 0 not accepted		OK
(3.3)	DK: power supply cord with label		---
	IT: warning label on Class 0 luminaire		---
(4.5.1)	DK, FR: socket-outlets		---
(5.2.1)	DK, FI, SE, GB: type of plug		---
ZC	ANNEX ZC, NATIONAL CONDITIONS ENEC-301 – AMENDMENT B RESTRICTIONS		
(13.3)	DK: needle-flame or glow-wire test		---
(13.3.2 + 13.3.3)	FR: glow-wire test		---
IEC 598-1	COMMON MODIFICATIONS		
3.2.12	NL - cable without mains plug		---
3.3.3.c	fixed wiring		---
4.11.6	Electro-mechanical contact systems		---
5.2.2	Type of cable		---
5.2.15	Colour code low voltage		---






No. of the Test Report: 601205-01/03

Issued: 13. 6. 2016



TEST REPORT

Name of product: Fixed general purpose luminaires,
road and street lighting

Type of product: URBINO LED

Ratings: 220-240 V, 50/60 Hz, 28, 37, 55, 84, 110 W, IP 66,
class I

Serial number: -

Manufacturer: LUG Light Factory Sp. z o.o., ul. Gorzowska 11,
65-127 Zielona Góra, the Republic of Poland

Production site: LUG Light Factory Sp. z o.o., ul. Gorzowska 11,
65-127 Zielona Góra, Poland

Ordering firm: LUG Light Factory Sp. z o.o., ul. Gorzowska 11,
65-127 Zielona Góra, the Republic of Poland

Number of tested samples: 1

Samples submitted on: 8. 6. 2016

Location of testing: EZÜ

Tested from 9. 6. 2016 through 9. 6. 2016

Other data: Tested on: 1300222.5L111.031

The product was tested according to: ČSN EN 62471.09

Compiled by: Pavel Vodrážka



Approved by: Lukáš Burda
Testing laboratory
technical manager

Test results stated in the test report apply only to the tested subject and unless specified otherwise in the test report, the tests were performed using the method and under the conditions determined in the test regulations, technical norm, instructions for use and information provided by the manufacturer on the tested subject and using accessories required by the manufacturer. Without written consent, this report must not be reproduced in any other way than as a whole.

Measured values

Risk	Symbol	Measured value	Group
Blue light	L_B	$161 \text{ W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	exempt

Measured with supply voltage 230 V. Ambient temperature 25 °C. Measured at 500 lx distance.

Conclusion

Light source can be considered as low risk light source – Risk Group 1 (RG 1).

Emission limits for risk groups of continuous wave lamps						
Risk	Action spectrum	Symbol	Units	Emission Measurement		
				Exempt	Low risk	Mod risk
				Limit	Limit	Limit
Blue light	B(λ)	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	10000	4000000

Measured by:  Lukáš Burda



ELECTROTECHNICAL TESTING INSTITUTE
Pod Lisem 129
171 02 Praha 8 - Troja

No. of pages: 36
No. of annexes/No. of an. pages: 0/0

No. of the Test Report: 601205-01/02

Issued: 6. 5. 2016



TEST REPORT

Name of product: Fixed general purpose luminaires, road and street lighting

Type of product: URBINO LED

Ratings: 220-240 V, 50/60 Hz, 28, 37, 55, 84, 110 W, IP 66, IK 09, class I

Serial number: Not specified

Manufacturer: LUG Light Factory Sp. z o.o., ul. Gorzowska 11, 65-127 Zielona Góra, the Republic of Poland

Production site: LUG Light Factory Sp. z o.o., ul. Gorzowska 11, 65-127 Zielona Góra, Poland

Ordering firm: LUG Light Factory Sp. z o.o., ul. Gorzowska 11, 65-127 Zielona Góra, the Republic of Poland

Number of tested samples: 1 + 1

Samples submitted on: 25.4.2016

Location of testing: EZÚ

Tested from 28 April **through** 3 May 2016

Other data: Tested type representative: 130222.5L021.031 and 130222.5L111.031

The product was tested according to: ČSN EN 55015 ed. 4:14,
ČSN EN 61547: ed. 2:10,
ČSN EN 61000-3-3 ed. 3 :14,
ČSN EN 61000-3-2 ed.4:15

Compiled by: Karel Pařízek



Approved by: Miroslav Vondra
Testing laboratory
technical manager

Test results stated in the test report apply only to the tested subject and unless specified otherwise in the test report, the tests were performed using the method and under the conditions determined in the test regulations, technical norm, instructions for use and information provided by the manufacturer on the tested subject and using accessories required by the manufacturer.
Without written consent, this report must not be reproduced in any other way than as a whole.



1. Emise - Emission

ČSN EN 55015 ed.4:2014	<i>Meze a metody měření charakteristik rádiového rušení způsobeného elektrickými svítidly a podobným zařízením</i>
EN 55015:2013	<i>Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment</i>
ČSN EN 61000-3-2 ed.4:2015	<i>Elektromagnetická kompatibilita (EMC) - Meze - Meze pro emise harmonického proudu</i>
EN 61000-3-2:2014	<i>Electromagnetic compatibility (EMC) - Limits - Limits for harmonic current emission</i>
ČSN EN 61000-3-3: ed. 3:2014	<i>Elektromagnetická kompatibilita (EMC) - Část 3-3: Meze - Omezování změn napětí, kolísání napětí a flikru v rozvodných sítích nízkého napětí pro zařízení se jmenovitým fázovým proudem $\leq 16A$, které není přemětem podmíněného připojení</i>
EN 61000-3-3 :2013	<i>Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16A$ per phase and not subject to conditional connection</i>

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianty – Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Požadavky při zkouškách - Requirements at tests:

Norma -Standard	Kmitočtové pásmo - Frequency band	Mezní hodnoty - Allowed values	Poznámka - Note
(ČSN) EN 55015 Čl. - Art. 4.3.1	f [MHz] 0.009 - 0.05 0.05 - 0.15 0.15 - 0.5 0.5 - 5 5 - 30	QP / AV [dB(μV)] 110 / --- 90 - 80 / --- 66 - 56 / 56 - 46 56 / 46 60 / 50	Vyhovuje - Pass
(ČSN) EN 55015 Čl. - Art. 4.4.1 (d=2m)	f [MHz] 0.009 - 0.07 0.07 - 0.15 0.15 - 3 3 - 30	QP [dB(μA)] 88 88 - 58 58 - 22 22	Vyhovuje - Pass
(ČSN) EN 55015 Čl. - Art. 4.4.2	f [MHz] 30 - 230 230 - 300	QP [dB(μV/m)] 30 d=10m 37	Vyhovuje - Pass
(ČSN) EN 6100-3-2 Čl. - Art. 7.3	0 - 2 kHz	Třída C/ Class C	Vyhovuje - Pass
(ČSN) EN 6100-3-3	50Hz	---	Nevztahuje se - Not applicable *)



Poznámky - Notes:

Testovány reprezentativní typy - Tested representative types: 130222.5L021.031, 130222.5L111.031

Výsledky zkoušek uvedených v protokolu se týkají zařízení s elektronickými předřadníky - The results of the tests specified in the protocol relating to device with electronic ballasts:

Varianta –Variant: 130222.5L021.031 (25W):

OSRAM OPTOTRONIC OT 50/120-277/800 2DIMLT2 P

Varianty –Variants: 130222.5L051.031, 130222.5L111.031 (50W, 100W):

OSRAM OPTOTRONIC OT 100/120-277/800 2DIMLT2 P

*) Podle ČSN EN61000-3-3, čl. A2 - According to EN 61000-3-3, Art. A2

Výsledek - Test result: Vyhovuje - Pass

Zpracoval - Compiled by: Pařízek

Datum - Date: 6.5. 2016

Místo měření - Measured at: EZÚ



Měření rušivých napětí zaváděných do sítě
Measurement of interference voltages introduced into the mains
Podle - According to: (ČSN) EN 55015 čl. 4.3.1 - art. 4.3.1

Výrobek - Product: Fixed general purpose luminaires, road and street lighting
Typ - Type: URBINO LED IP66
Varianty - Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 23°C Rel. vlhkost - Rel. humidity: 28%

Aplikované meze - Applied limits:

Pásmo - Band	Meze dB(μV), kvazivrcholová/střední Limits dB(μV), quasi-peak/average
9kHz - 50kHz	110 / ∞
50kHz - 150kHz	90 - 80 / ∞
150kHz - 0,5MHz	66 - 56 / 56 - 46
0,5MHz - 5,0MHz	56 / 46
5,0MHz - 30MHz	60 / 50

Uspořádání při měření - Measuring arrangement:



Poznámky - Notes:

Naměřené hodnoty viz následující stránky - For measured values see next pages

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZU




EMI Measurement

Common Information

EUT Name:	URBINO LED
Type	130222.5L021.031
Test Description	EN 55015
Operating Conditions	230V, 50Hz, P=25W
Operator Name:	Pařízek
Comment:	L, N

Voltage 55015

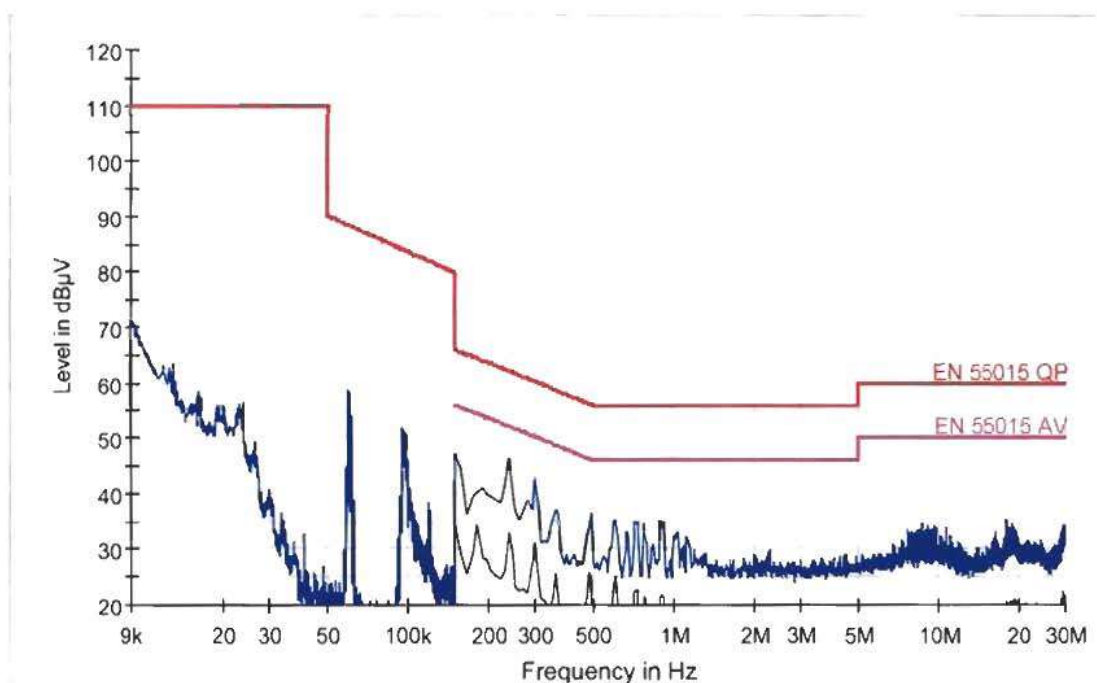

2.5.2016

11:18:08

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222.5L111.031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=100W
Operator Name: Pařízek
Comment: L, N

Voltage 55015

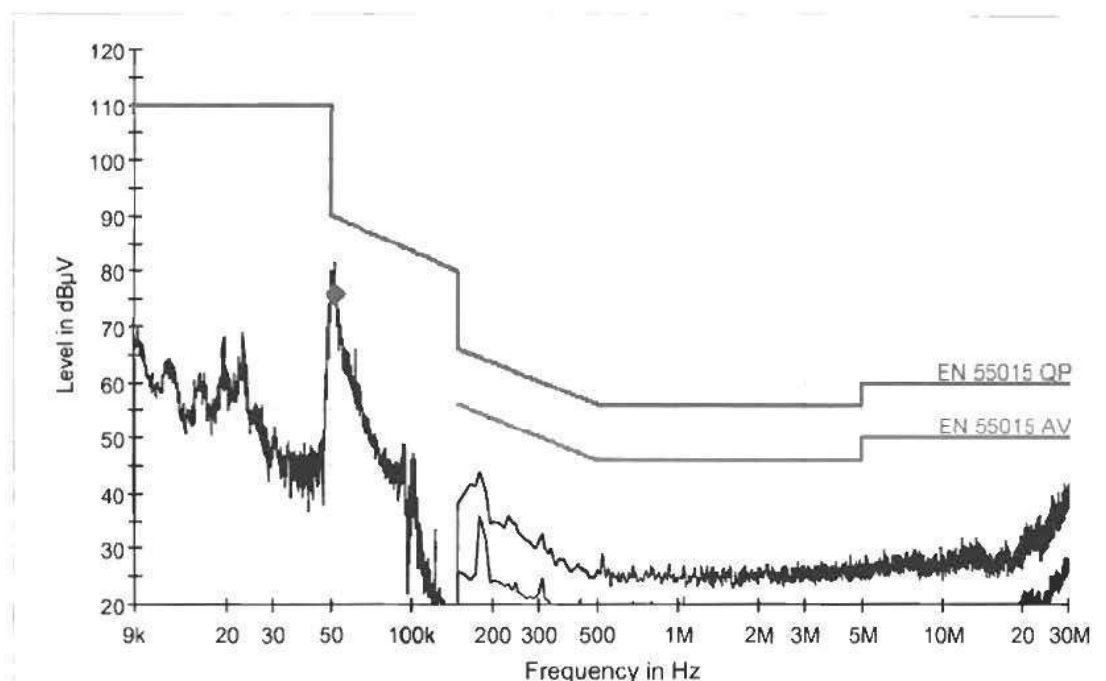

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.051480	75.8	1000.000	0.200	GN D	N	11.1	14.2	90

2.5.2016

11:07:09

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ



Výrobek - Product:	Fixed general purpose luminaires, road and street lighting
Typ - Type:	URBINO LED IP66
Varianty – Variants:	130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Teplota - Temperature: 23°C Rel. vlhkost - Rel. humidity: 28%

Pásmo - Band	Meze dB(μA), kvazivrcholová Limits dB(μA), quasi-peak
9 - 70 kHz	88
70 - 150 kHz	88 - 58
150 kHz - 3 MHz	58 - 22
3 - 30 MHz	22

Diagram illustrating the setup for measuring the radiation pattern of an antenna using a reverberation chamber. The chamber is a large sphere with a diameter of 2.5 m. Inside the chamber, the "Equipment under test" is placed. A cable connects the equipment to the "Measuring equipment" outside the chamber. The chamber is lined with "Ferrite absorber" (F) and contains a "Current probe" (C). The setup is used to measure the radiation pattern of the antenna (S) in a reverberant environment.

Naměřené hodnoty viz následující stránky - For measured values see next pages

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222.5L021.031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=25W
Operator Name: Pařízek
Comment: Axis x

EFS with Scans EZU KRUH2M2

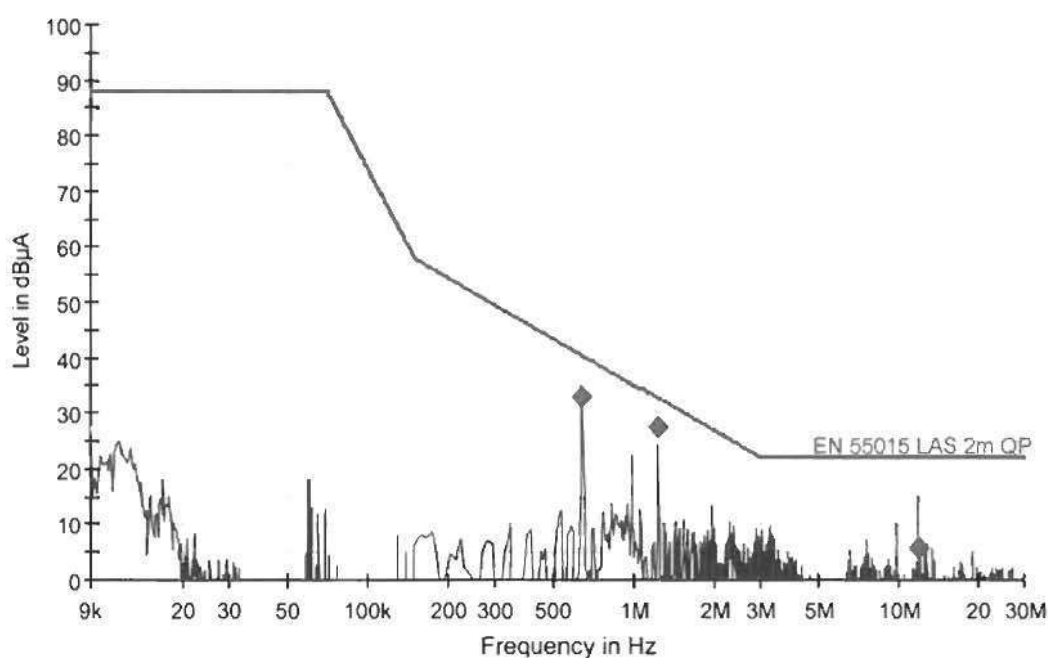

Final Result 1

Frequency (MHz)	QuasiPeak (dBμA)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBμA)
0.638000	32.9	1000.00	9.000	1.0	7.7	40.6
1.230000	27.5	1000.00	9.000	0.9	5.2	32.7
11.854000	5.9	1000.00	9.000	0.8	16.1	22.0

2.5.2016

9:23:55

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222.5L021.031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=25W
Operator Name: Parizek
Comment: Axis y

EFS with Scans EZU KRUH2M2

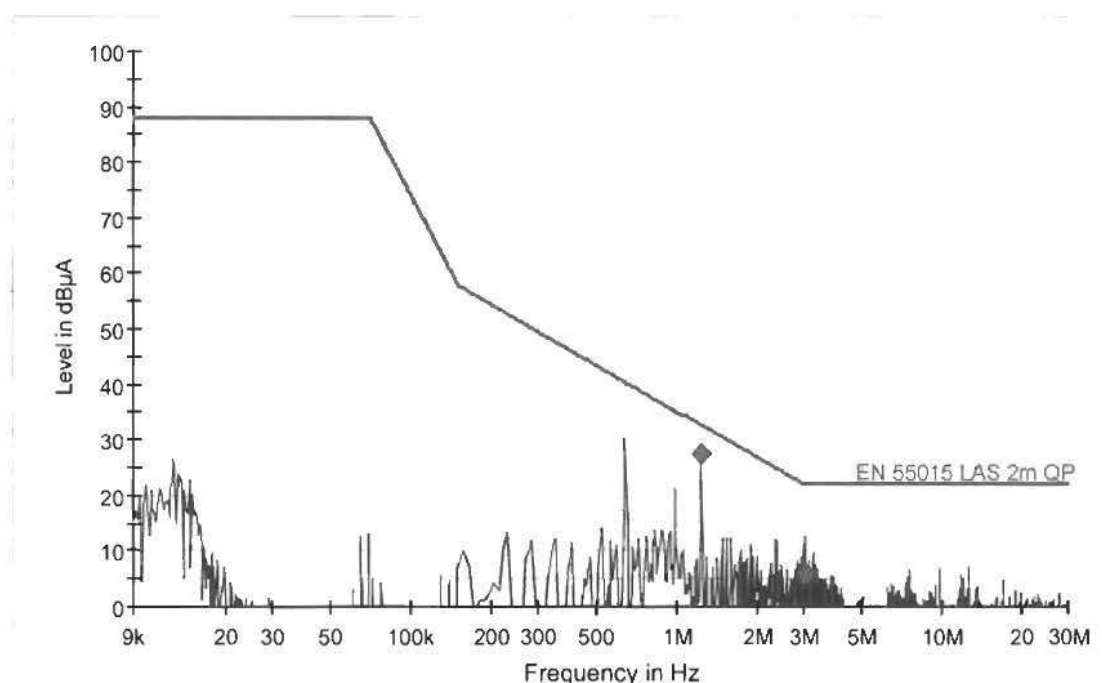

Final Result 1

Frequency (MHz)	QuasiPeak (dBμA)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBμA)
1.230000	27.6	1000.00	9.000	0.9	5.1	32.7
3.030000	5.9	1000.00	9.000	0.8	16.1	22.0

2.5.2016

9:29:02

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222 5L021 031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=25W
Operator Name: Pařízek
Comment: Axis z

EFS with Scans EZU KRUK2M2

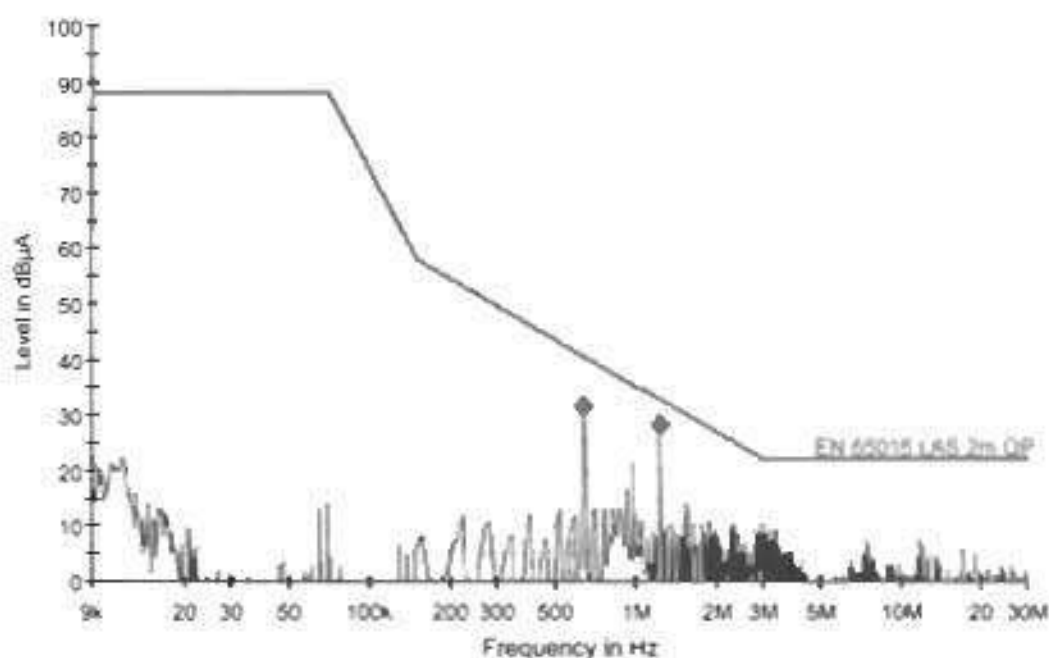

Final Result 1

Frequency (MHz)	QuasiPeak (dBµA)	Mess. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBµA)
0.638000	31.5	1000.00	9.000	1.0	9.1	40.6
1.230000	28.4	1000.00	9.000	0.9	4.3	32.7

2.5.2016

9:32:13




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222 5L111.031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=100W
Operator Name: Pařízek
Comment: Axis x

EFS with Scans EZU KRUH2M2

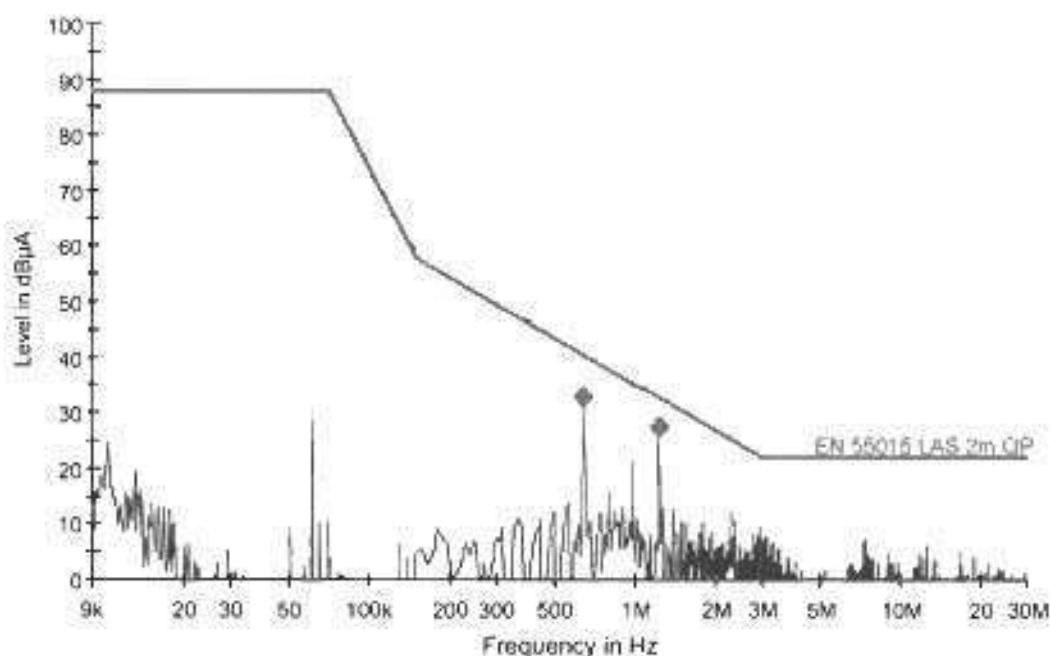

Final Result 1

Frequency (MHz)	QuasiPeak (dBµA)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBµA)
0.638000	32.9	1000.00	9.000	1.0	7.7	40.6
1.230000	27.5	1000.00	9.000	0.9	5.2	32.7

2.5.2016

9:37:44




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222 5L111 031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=100W
Operator Name: Parizek
Comment: Axis y

EFS with Scans EZU KRUH2M2

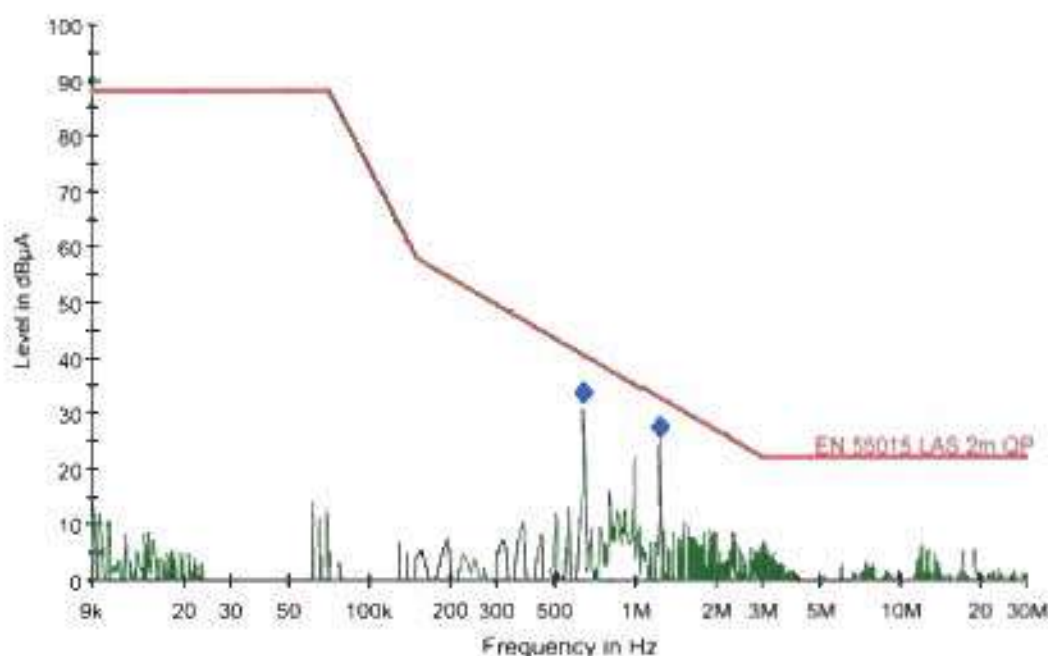

Final Result 1

Frequency (MHz)	QuasiPeak (dBμA)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBμA)
0.638000	33.6	1000.00	9.000	1.0	7.0	40.6
1.230000	27.5	1000.00	9.000	0.9	5.2	32.7

2.5.2016

9:42:15

Měřil - Measured by: Parizek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZU




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222 5L111 031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=100W
Operator Name: Patizek
Comment: Axis z

EFS with Scans EZU KRIJH2M2

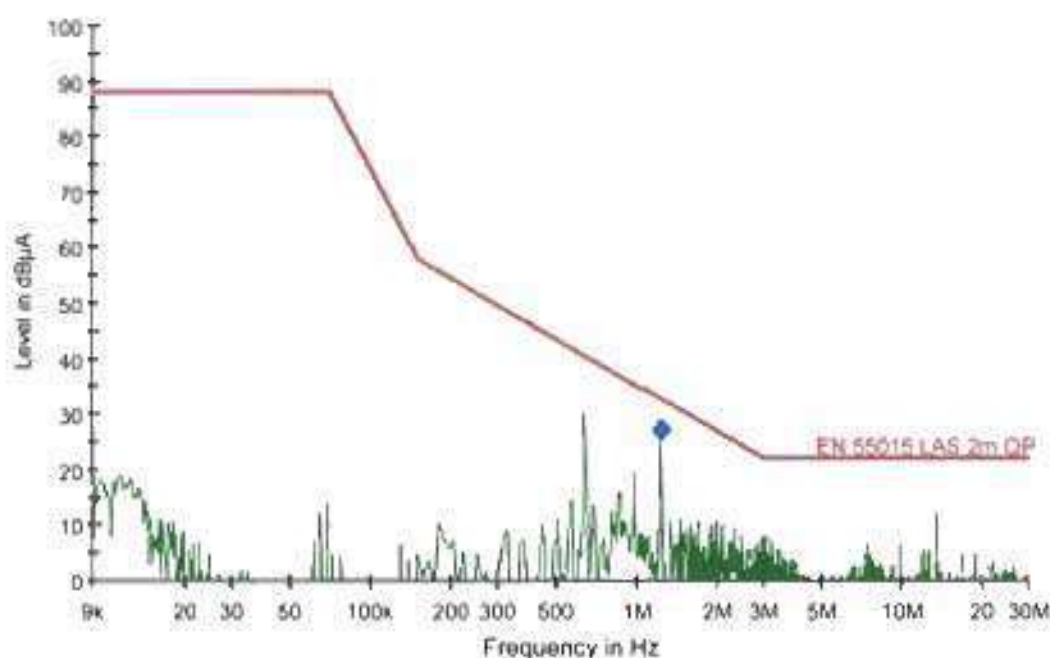

Final Result 1

Frequency (MHz)	QuasiPeak (dBµA)	Meas. Time (ms)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBµA)
1.230000	27.0	1000.00	9.000	0.9	5.7	32.7

2.5.2016

9:46:45

Patizek



Měření rušivého vyzařování v pásmu 30 - 300 MHz
Measurement of interfering radiation in the 30 - 300 MHz band
Podle - According to: (ČSN) EN 55015 čl. - art. 4.4.2

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianty - Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:


230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 23°C Rel. vlhkost - Rel. humidity: 28%

Aplikované meze - Applied limits:

Pásmo - Band (MHz)	Meze dB(μV/m), kvazivrcholová Limits dB(μV/m), quasi-peak
30 - 300	*) 30 (d=10m)
230 - 300	*) 37 (d=10m)

Uspořádání při měření - Measuring arrangement:

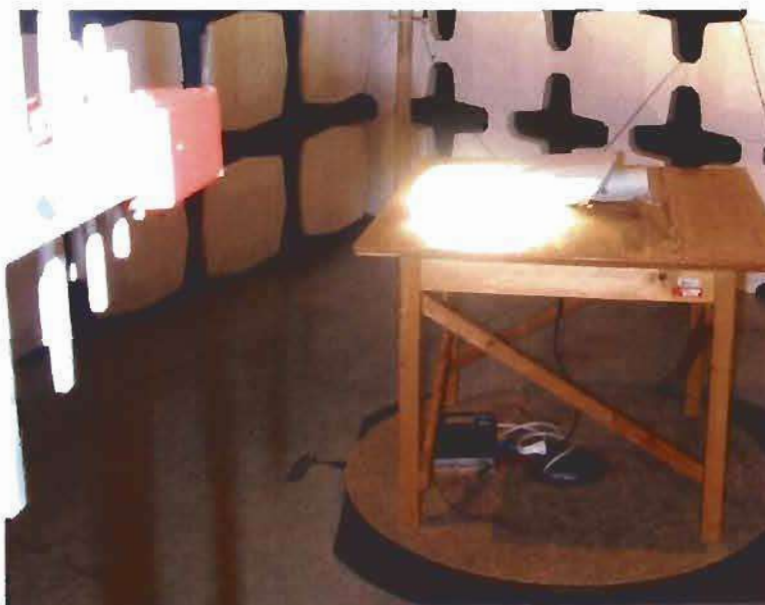

Poznámky - Notes:

Naměřené hodnoty viz následující stránky - For measured values see next pages

*) Limity a hodnoty přepočteny na měřicí vzdálenost 3m - Limits and values converted to 3 m measuring distance

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name:	URBINO LED
Type	130222.5L021.031
Test Description	EN 55015
Operating Conditions	230V, 50Hz, P=25W
Operator Name:	Parizek
Comment:	H polarization

EFS EZU Luminaire

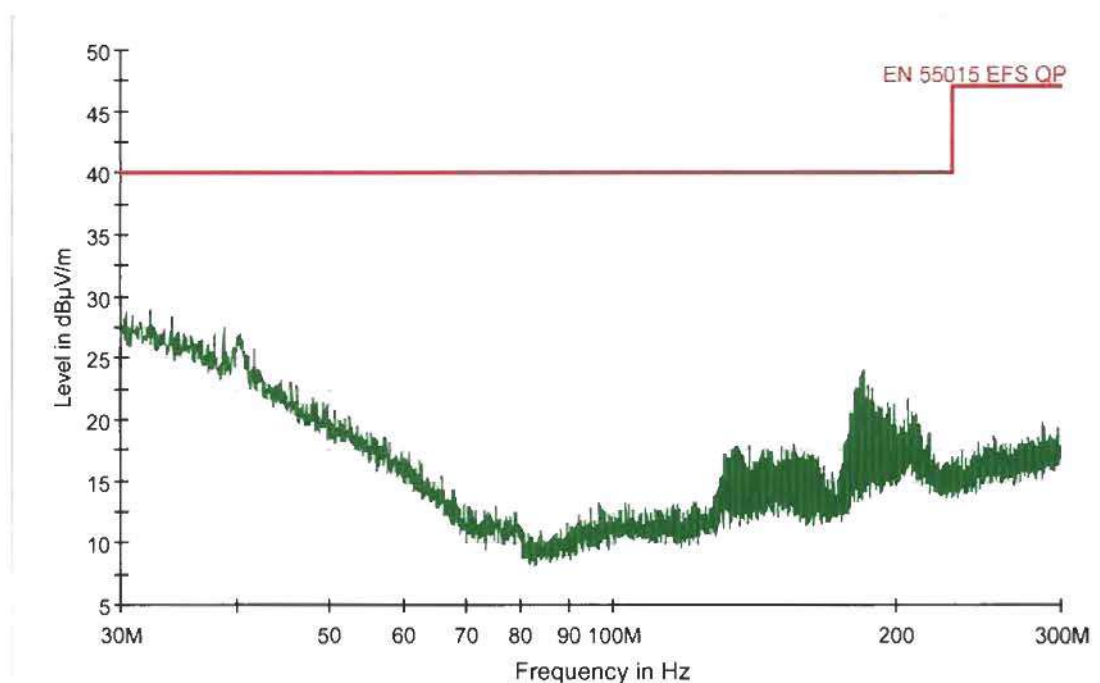

2.5.2016

9:05:06

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222 5L021.031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=25W
Operator Name: Panžek
Comment: V polarization

EFS EZU Luminaire

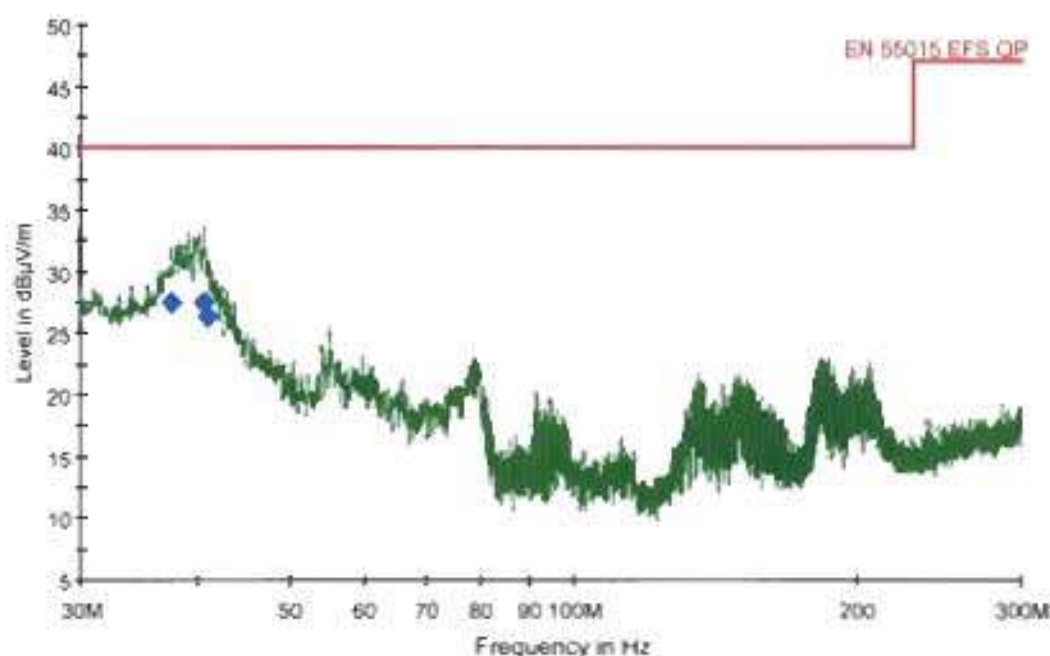

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
37.440000	27.5	116.0	V	189.0	23.8	12.5	40.0
40.500000	27.6	150.0	V	188.0	22.4	12.4	40.0
40.920000	26.4	115.0	V	90.0	22.2	13.6	40.0

2.5.2016

8:51:09

Měřil - Measured by: Panžek

Datum - Date: 2.5.2016

Místo měření - Measured at: EZU




EMI Measurement

Common Information

EUT Name:	URBINO LED
Type	130222.5L111.031
Test Description	EN 55015
Operating Conditions	230V, 50Hz, P=100W
Operator Name:	Pařízek
Comment:	H polarization

EFS EZU Luminaire

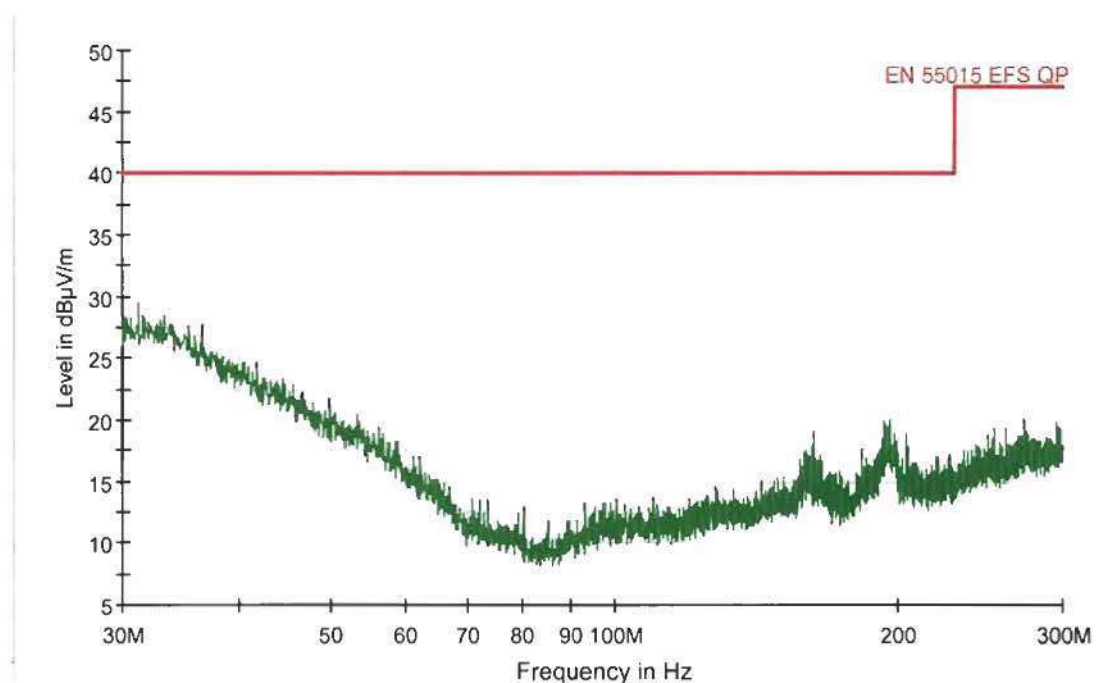

2.5.2016

8:25:35

Měřil - Measured by: Pařízek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZÚ




EMI Measurement

Common Information

EUT Name: URBINO LED
Type: 130222 5L111.031
Test Description: EN 55015
Operating Conditions: 230V, 50Hz, P=100W
Operator Name: Panžek
Comment: V polarization

EFS EZU Luminaire

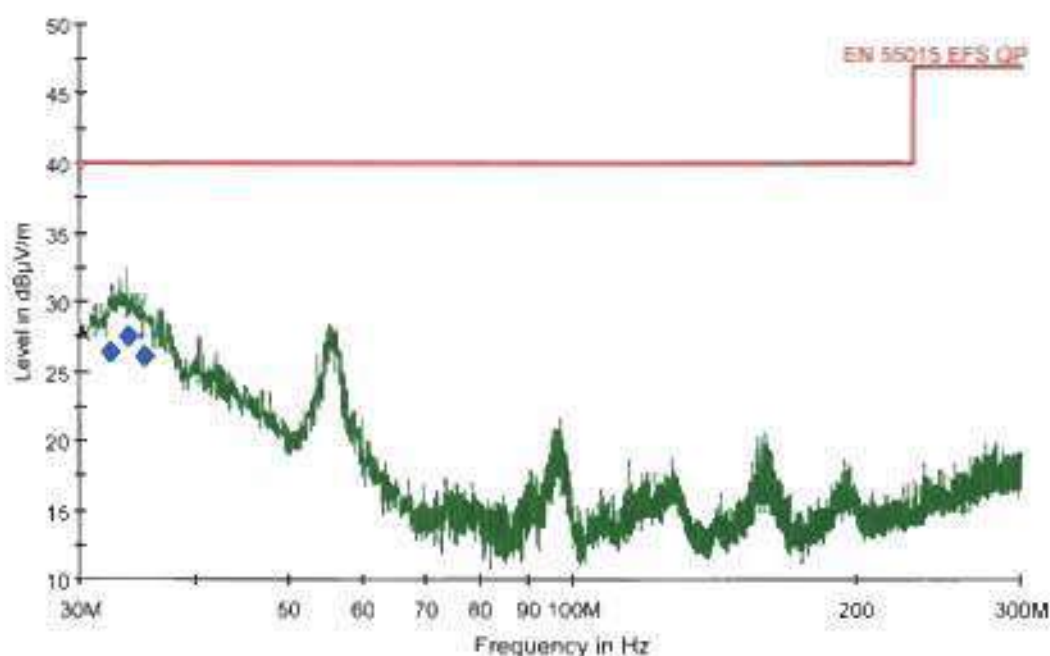

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
32.280000	26.4	115.0	V	90.0	26.4	13.6	40.0
33.780000	27.6	115.0	V	115.0	25.9	12.4	40.0
35.040000	26.1	110.0	V	197.0	25.2	13.9	40.0

2.5.2016

8.34.10

Měřil - Measured by: Panžek

Datum - Date: 2.5. 2016

Místo měření - Measured at: EZU



Elektromagnetická kompatibilita (EMC) - Meze -
Meze pro emise harmonického proudu
Electromagnetic compatibility (EMC) - Limits -
Limits for harmonic current emission
Podle - According to: (ČSN) EN 61000-3-2 čl. 7.3 - art. 7.3


Výrobek - Product: Fixed general purpose luminaires, road and street lighting
Typ - Type: URBINO LED IP66
Varianty - Variants: I30222.5L021.031, I30222.5L051.031, I30222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 22°C Rel. vlhkost - Rel. humidity: 30%

Uspořádání při měření - Measuring arrangement:

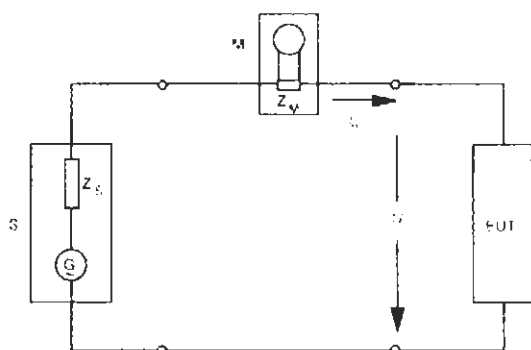

S napájecí zdroj - source
EUT zkoušené zařízení - tested equipment
M analyzátor harmonických - harmonic analyser
Z_M měřicí bočník - measuring shunt
Z_S vnitřní impedance napájecího zdroje - internal impedance of source
I_n n-té harmonické proudy ve fázovém/středním vodiči - nth harmonic component of current in the phase/neutral line

Aplikované meze - Applied limits:

Rád harmonické - Order of harmonics	Limit (%I _I) P > 25W	Limit (%I _I) P ≤ 25W
2	2	--
3	30.λ	86
5	10	61
7	7	--
9	5	--
n 11 - 39 (jen liché - only odd)	3	--

λ = účinník - power factor

Poznámky - Notes:

Zařízení třídy C - Equipment class C

Naměřené hodnoty viz následující stránky - For measured values see next pages

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 29.4. 2016

Místo měření - Measured at: EZÚ

**Test Report ISMDPA**

Report title:	601205-01/02
Company Name:	EZU
Date of test:	7:33 29.Apr 2016
Measurement file name:	Harmonics_3_2_Ed4.rsd
Tester:	Pařízek
Standard used:	EN/IEC 61000-3-2 Ed.4 Quasi-stationary Equipment class C
Observation time:	10s
Windows width:	10 periods - (EN/IEC 61000-4-7 Edition 2002 + A1:2008)
Customer:	NAREX
E. U. T.:	URBINO LED 130222.5L021.031
Temperature :	22
Humidity :	30
Comment:	230 V, 50 Hz, P=33W
Measurement smoothed data:	Fund. Current: 0.144A Power Factor: 0.945

Test Result	
E. U. T.:	PASS
Power Source:	PASS

29.Apr 2016

(Date)

Pařízek

(Sign)

**E. U. T. Result****Check harmonics 2..40 [exception odd 21..39]:****Harmonic(s) > 150%:**

Order (n): None

Harmonic(s) with average > 100%:

Order (n): None

Check odd harmonics 21..39:**All Partial Odd Harmonics below partial limits.****Harmonic(s) > 150%:**

Order (n): None

Harmonic(s) with average > 150%:

Order (n): None

Power Source Result**First dataset out of limit:**

DS (time): None

Harmonic(s) out of limit:

Order (n): None

**Average harmonic current results**

Hn	I _{eff} [A]	I _{eff} [%]	Limit [%]	Result
1	144.211E-3	99.967		
2	575.446E-6	0.399		PASS
3	18.680E-3	12.949	28.36	PASS
4	470.560E-6	0.326		PASS
5	7.109E-3	4.928	10.00	PASS
6	480.496E-6	0.333		PASS
7	4.370E-3	3.029		PASS
8	441.514E-6	0.306		PASS
9	2.894E-3	2.006		PASS
10	436.638E-6	0.303		PASS
11	1.784E-3	1.237		PASS
12	406.854E-6	0.282		PASS
13	744.416E-6	0.516		PASS
14	395.683E-6	0.274		PASS
15	411.544E-6	0.285		PASS
16	412.329E-6	0.286		PASS
17	548.328E-6	0.380		PASS
18	403.445E-6	0.280		PASS
19	744.938E-6	0.516		PASS
20	455.536E-6	0.316		PASS
21	747.293E-6	0.518		PASS
22	431.778E-6	0.299		PASS
23	601.700E-6	0.417		PASS
24	431.307E-6	0.299		PASS
25	590.051E-6	0.409		PASS
26	417.861E-6	0.290		PASS
27	462.597E-6	0.321		PASS
28	386.157E-6	0.268		PASS
29	395.828E-6	0.274		PASS
30	396.636E-6	0.275		PASS
31	386.496E-6	0.268		PASS
32	401.925E-6	0.279		PASS
33	433.972E-6	0.301		PASS
34	385.419E-6	0.267		PASS
35	457.373E-6	0.317		PASS
36	386.779E-6	0.268		PASS
37	446.058E-6	0.309		PASS
38	365.642E-6	0.253		PASS
39	503.804E-6	0.349		PASS
40	372.236E-6	0.258		PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.

**Test Report ISMDPA**

Report title:	601205-01/02
Company Name:	EZU
Date of test:	7:59 29.Apr 2016
Measurement file name:	Harmonics_3_2_Ed4.rsd
Tester:	Pařízek
Standard used:	EN/IEC 61000-3-2 Ed.4 Quasi-stationary Equipment class C
Observation time:	10s
Windows width:	10 periods - (EN/IEC 61000-4-7 Edition 2002 + A1:2008)
Customer:	LUG
E. U. T.:	URBINO LED 130222.5L111.031
Temperature :	22
Humidity :	30
Comment:	230 V, 50 Hz, P=117W
Measurement smoothed data:	Fund. Current: 0.509A Power Factor: 0.983

Test Result	
E. U. T.:	PASS
Power Source:	PASS

29.Apr 2016

(Date)

Pařízek

(Sign)

**E. U. T. Result****Check harmonics 2..40 [exception odd 21..39]:**

Harmonic(s) > 150%:		
Order (n):	None	
Harmonic(s) with average > 100%:		
Order (n):	None	

Check odd harmonics 21..39:

All Partial Odd Harmonics below partial limits.		
Harmonic(s) > 150%:		
Order (n):	None	
Harmonic(s) with average > 150%:		
Order (n):	None	

Power Source Result

First dataset out of limit:		
DS (time):	None	
Harmonic(s) out of limit:		
Order (n):	None	

**Average harmonic current results**

Hn	I _{eff} [A]	I _{eff} [%]	Limit [%]	Result
1	509.057E-3	99.949		
2	993.964E-6	0.195		PASS
3	40.048E-3	7.863	29.49	PASS
4	1.410E-3	0.277		PASS
5	17.901E-3	3.515	10.00	PASS
6	965.849E-6	0.190		PASS
7	12.428E-3	2.440	7.00	PASS
8	909.569E-6	0.179		PASS
9	9.779E-3	1.920	5.00	PASS
10	882.364E-6	0.173		PASS
11	7.073E-3	1.389	3.00	PASS
12	879.482E-6	0.173		PASS
13	4.446E-3	0.873		PASS
14	971.053E-6	0.191		PASS
15	2.833E-3	0.556		PASS
16	1.012E-3	0.199		PASS
17	1.938E-3	0.381		PASS
18	990.428E-6	0.194		PASS
19	1.444E-3	0.283		PASS
20	1.065E-3	0.209		PASS
21	1.072E-3	0.210		PASS
22	1.111E-3	0.218		PASS
23	1.064E-3	0.209		PASS
24	1.056E-3	0.207		PASS
25	1.096E-3	0.215		PASS
26	1.062E-3	0.209		PASS
27	1.167E-3	0.229		PASS
28	1.047E-3	0.206		PASS
29	1.153E-3	0.226		PASS
30	1.067E-3	0.210		PASS
31	1.298E-3	0.255		PASS
32	1.042E-3	0.205		PASS
33	1.141E-3	0.224		PASS
34	976.366E-6	0.192		PASS
35	1.081E-3	0.212		PASS
36	981.026E-6	0.193		PASS
37	1.018E-3	0.200		PASS
38	954.208E-6	0.187		PASS
39	968.726E-6	0.190		PASS
40	882.122E-6	0.173		PASS

Harmonic currents less than 0.6% of the input current measured under the test conditions, or less than 5 mA, whichever is greater, are disregarded.



2. Odolnost - Immunity

(ČSN) EN 61547 *Zařízení pro všeobecné osvětlovací účely - EMC - požadavky odolnosti*
Equipment for general lighting purposes - EMC - immunity requirements

Výrobek - Product: LED svítidlo - LED luminaire

Typ - Type: UQ3A/600/700ND/IP54

Požadavky při zkouškách - Requirements at tests:

Kmenová norma - Generic standard	Úroveň - Level	Povolená chyba - Allowed error *1)	Poznámka - Note
(ČSN) EN61000-4-2	±4kV / ±8 kV	B	Vyhovuje - Pass
(ČSN) EN61000-4-3	3V/m 80 - 1000 MHz	A	Vyhovuje - Pass
(ČSN) EN61000-4-4	±1kV	B	Vyhovuje - Pass
(ČSN) EN61000-4-5	±1kV / ±2kV	C	Vyhovuje - Pass
(ČSN) EN61000-4-6	3 V 0,15 - 80 MHz	A	Vyhovuje - Pass
(ČSN) EN61000-4-8	3 A/m	A	*2) Vyhovuje - Pass
(ČSN) EN61000-4-11	200 ms / 70%U _T 10 ms / 0% U _T	C B	Vyhovuje - Pass

Poznámky - Notes:

Testovány reprezentativní typy - Tested representative types: 130222.5L021.031, 130222.5L111.031

Výsledky zkoušek uvedených v protokolu se týkají zařízení s elektronickými předřadníky - The results of the tests specified in the protocol relating to device with electronic ballasts:

Varianta - Variant: 130222.5L021.031 (25W):

OSRAM OPTOTRONIC OT 50/120-277/800 2DIMLT2 P

Varianty - Variants: 130222.5L051.031, 130222.5L111.031 (50W, 100W):

OSRAM OPTOTRONIC OT 100/120-277/800 2DIMLT2 P

*1) Funkční kritéria A, B, C dle (ČSN) EN 61547, čl.4.2 -
Performance criteria according (ČSN) EN 61547, art. 4.2

*2) Zařízení neobsahují prvky citlivé na magnetické pole -
Devices do not contain parts sensitive to the magnetic field

Výsledek - Test result: Vyhovuje - Pass



Zkouška odolnosti proti elektrostatickým výbojům
Test of electric discharge resistance
Podle - According to: (ČSN) EN 61000-4-2

Výrobek - Product: Fixed general purpose luminaires, road and street lighting
Typ - Type: URBINO LED IP66
Varianty - Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 24°C Rel. vlhkost - Rel. humidity: 29%

Požadované kritérium - Allowed criterion: B

Počet zkušebních výbojů: 10/10 kontaktních/vzduchových výbojů do každého testovaného místa v obou polaritách, mimo to nepřímé kontaktní výboje do vodorovné a svislé vazební desky

Number of testing discharges: 10/10 contact/air discharge to every test-places in each polarity, besides indirect contact discharges into a horizontal and vertical coupling plane

Testovaná místa: Kontaktní výboj do kovových částí a do vodorovné a svislé vazební desky.

Vzduchový výboj do skleněného krytu

Tested points: Contact discharge into the metal parts and to the horizontal and vertical coupling plane. Air discharge to the glass cover

Zkušební napětí - Testing voltage [kV]: ± 4 - kontaktní výboj - contact / ± 8 - vzduchový výboj - air

Splněné kritérium - Achieved criterion: A

Zkušební uspořádání - Measuring arrangement:



Poznámky - Notes:  kontakt – contact,  vzduch. výboj - air

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek
Hec.

Datum - Date: 28.4. 2016

Místo měření - Measured at: EZÚ



Zkouška odolnosti proti vf elektromagnetickým polím
Immunity test - radiated electromagnetic field requirements
Podle - According to: (ČSN) EN 61000-4-3

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianty - Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 23°C Rel. vlhkost - Rel. humidity: 29%

Aplikované meze - Applied limits:


Kmitočtový rozsah - Scan spectrum: 80 - 1000 MHz

Intenzita pole - Intensity of field: 3 V/m (80% AM, 1kHz)

Požadované kritérium - Allowed criterion: A

Splněné kritérium - Achieved criterion: A

Uspořádání při měření - Measuring arrangement:

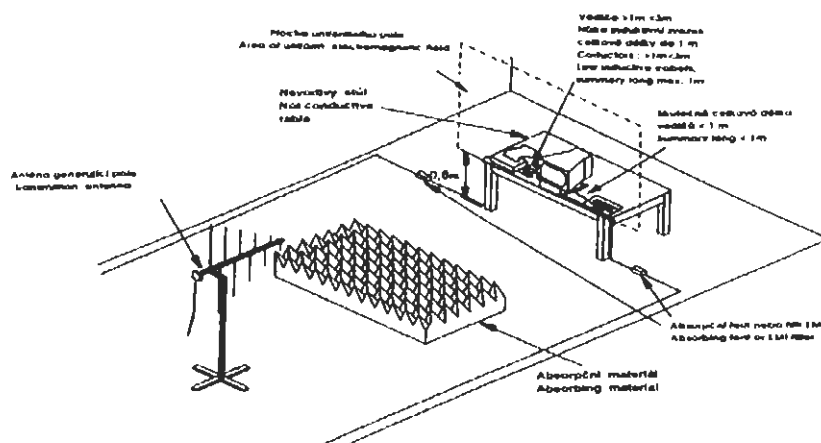

Poznámky - Notes:

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 3.5. 2016

Místo měření - Measured at: EZÚ



Zkouška rychlými přechodovými jevy
Test by quick transient burst
Podle - According to: (ČSN) EN 61000-4-4

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianty - Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation


Teplota - Temperature: 24°C Rel. vlhkost - Rel. humidity: 29%

Požadované kritérium - Allowed criterion: B

Aplikované zkušební napětí: - Testing voltage applied:

Aplikované napětí - Applied voltage	Zkušební úroveň - Testing level	Splněné kritérium - Performance criterion	Poznámka - Remark
L,N,L+N	±1kV	A	Vazební sítě do napájení - Coupling networks to power supply
L+PE	±1kV	A	
N+PE	±1kV	A	
L+N+PE	±1kV	A	

Zkušební uspořádání - Measuring arrangement:

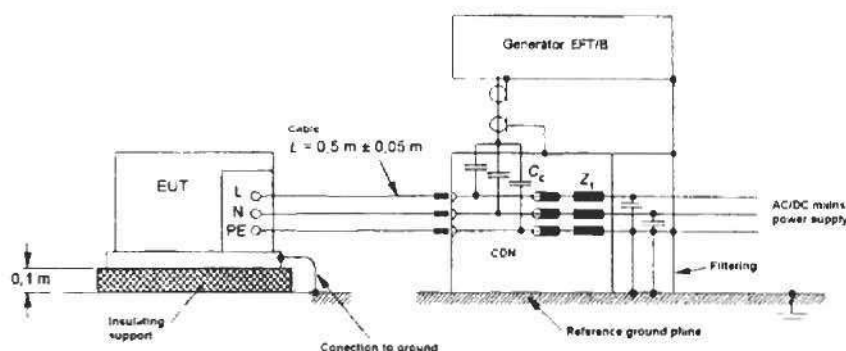

Poznámky - Notes:

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 28.4. 2016

Místo měření - Measured at: EZÚ



Zkouška rázovou vlnou
Surge immunity test
Podle - According to: (ČSN) EN 61000-4-5

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianty – Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation


Teplota - Temperature: 24°C Rel. vlhkost - Rel. humidity: 29%

Požadované kritérium - Allowed criterion: C

Aplikované zkušební napětí:

Aplikované napětí - Applied voltage	Zkušební úroveň - Testing level	Splněné kritérium - Performance criterion	Poznámka - Remark
L-N	±1kV	B	90°, 270°
L-PE, N-PE, L+N-PE	±2kV	B	90°, 270°

Uspořádání při měření - Measuring arrangement:

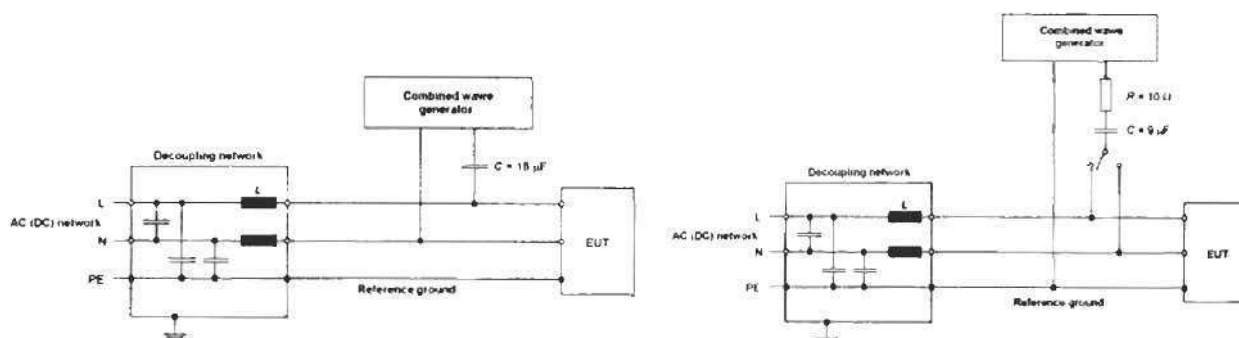

Poznámky - Notes:

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 28.4. 2016

Místo měření - Measured at: EZÚ



Zkouška odolnosti proti vf polím šířeným vedením
Immunity test - conducted disturbances induced by radio-frequency fields
Podle - According to: (ČSN) EN 61000-4-6

Výrobek - Product: Fixed general purpose luminaires, road and street lighting
Typ - Type: URBINO LED IP66
Varianty – Variants: 130222.5L021.031, 130222.5L051.031, 130222.5L111.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 24°C Rel. vlhkost - Rel. humidity: 29%


Požadované kritérium - Allowed criterion: A

Aplikované zkušební napětí:

Frekvenční pásmo - Frequency band	Zkušební napětí - Testing voltage level	Poznámka - Note
150kHz - 80MHz	3V (mod. 80% AM / 1 kHz)	Vazebním obvodem do napájení - Applied by coupling network to mains

Splněné kritérium - Achieved criterion: A

Uspořádání při měření - Measuring arrangement:

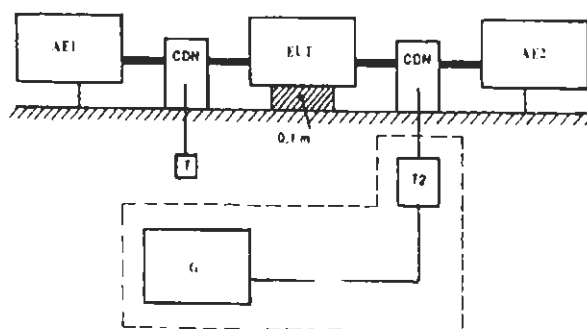

AE1, AE2 Přidružené zařízení - Associated Equipment
CDN Vazební/oddělovací síť - Coupling/decoupling network

G VF generátor - RF generator

T2 Útlumový člen - Attenuator

T Přizpůsobovací člen 50Ω - Matching circuit 50Ω

EUT Zkoušené zařízení - Equipment under test

Poznámky - Notes:

Výsledek-Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Datum - Date: 28.4. 2016

Místo měření - Measured at: EZÚ



Krátkodobé poklesy napětí, krátká přerušení a pomalé změny napětí
Voltage dips, short interruptions and voltage variations
Podle - According to: (ČSN) EN 61000-4-11

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianty - Variants: 130222.5L021.031, 130222.5L051.031, 130222.5LI11.031

Provozní podmínky - Operating conditions:

230V, 50Hz, minimálně 15 minut v provozu - minimally 15 minutes in operation

Teplota - Temperature: 24°C Rel. vlhkost - Rel. humidity: 29%

Požadované kritérium - Allowed criterion: C, B

Požadavky při zkouškách - Tests requirements:

Zkušební úroveň - Test level [%] Ut	Doba trvání - Duration [ms]	Požadované kritérium - Allowed criterion	Splněné kritérium - Achieved criterion
0	10	B	B
70	200	C	B

Poznámky - Notes:

Výsledek - Test result: Vyhovuje - Pass

Měřil - Measured by: Pařízek

Pařízek

Datum - Date: 28.4. 2016

Místo měření - Measured at: EZÚ

**Zkušební zařízení - Measuring equipment used:**

☒ Měřicí přijímač- Test receiver RaS	ESIB26	110097	01.2017
☐ Harmonic analyser SEAWARD	ORB	97-5947	09.2016
☒ Harmonic analyzer EM TEST	DPA503N	110272	08.2017
☒ Continuous wave simulator EM Test	CWS500N1	110233	03.2017
☐ Combination Wave Simulator EM Test	VCS 500N	110182	08.2017
☐ Combined 3-Phase CDN EM Test	CNI503	110181	08.2017
☒ EM Test	PFS 500	98-6040	10.2017
☒ Ultra Compact Simulator EM Test	UCS 500N	110235	01.2017
☒ ESD generator	ESD30N	110196	03.2017
☒ Artificial mains EMCO	3825/2	95-5852	06.2016
☐ Artificial mains Narda	PMM L3-32	110250	10.2016
☒ Antenna Frankonia	BTA-M	00-6321	10.2017

Pomocná zařízení - Auxiliary equipment:

☒ Field probe Narda	EP603	110273	10.2016
☐ Amplifier BONN ELEKTRONIK	BLWA0810-100	96-5871	
☐ Amplifier BONN ELEKTRONIK	BSA0115-50	98-6038	
☒ Amplifier PRÁNA	AP32 LT225	07-110145	
☐ Amplifier MILMEGA	AS0822-100	98-6038	
☐ Amplifier MILMEGA	AS0204-125	110144	
☐ Amplifier MILMEGA	AS1860-100	110219	
☒ Signal generator RaS	SMF100A	110167	11.2016
☐ MPEG2 Measurement generator	DVG	110120	
☐ TV Test Transmitter	SFL-T	110121	
☐ Tester mag. pole - Exposure Level Tester Narda	ELT-40	110130	09.2016
☐ Antenna Van den Hoofden	VDH-01	000WX30108	
☐ Antenna Double Ridged R&S	HF907	110177	08.2016
☐ Counter	PM6613	20200	
☐ Probe RFT	TK12	700044	
☐ Coupling/dec. EM TEST	CDN M2N	552097	10.2016
☒ Coupling/dec. EM TEST	CDN M3N	110233/1	10.2016
☐ Coupling/dec. EM TEST	CDN M5N	552097	06.2018
☐ Coupling. SCHAFFNER	T440		
☐ Capacitive coupling clamp	Haefely		
☐ Coupling filter Haefely	FP 16 / 3-1		
☐ Current probe	P MP-120		
☐ Current probe	AM503	79-4221	
☐ 8-Wire network Schwarzbeck	NTFM8158	110270	08.2017
☐ Elektromag. kleště- Electromag. injection clamp	EM-101	110233	10.2016
☐ Ferrite clamp 1-1000 MHz	EZ-24	10003	
☒ Anechoic chamber - Euroshield Oy	RFMSD-F/A	EZÚ	06.2016
☒ Notebook Dell	Dell D531	551492	
☒ Notebook Dell	Dell D531	551171	
☒ Notebook Dell	Dell E6520	552020	

Kabely - Cables:

- ☐ K1
- ☒ K22, ESH3-Z2
- ☐ K14, K15a, K16
- ☐ KB01, KB02, KB04
- ☐ K7, K10, ESH3-Z2
- ☒ KB12
- ☐ K23
- ☒ K24

EZU přípravy - EZU equipments:

- ☐ PR-01 - Coupling resistance 40 Ω
- ☐ PR-02 - Coupling capacitor 0,5 μ F
- ☒ Regulating transformer - ZPA RA20
- ☐ PR-21 - Stabilized power supply DF 3010
- ☐ PR-15 - Variable resistor 2,35 Ω /16A
- ☐ PR-57 - Isolation transformer 0 - 2kV
- ☐ P13 - Oddělovací přípravek - Separating preparation
- ☒ PR52 - VCP



Fotodokumentace - Photo-documentation

Výrobek - Product: Fixed general purpose luminaires, road and street lighting

Typ - Type: URBINO LED IP66

Varianta - Variant: 130222.5L021.031



Celkový pohled - Overview



Zdroj s předřadníkem - Source and LED controller



Výrobní štítek - Name plate



Varianța – Variant: 130222.51051.031



Celkový pohled - Overview



Zdroj s předřadníkem - Source and LED controller



Výrobní štítek - Name plate



Varianta – Variant: 130222.5L111.031



Celkový pohled – Overview



Výrobní štítek - Name plate

Handwritten signature



ELECTROTECHNICAL TESTING INSTITUTE
Pod Lisem 129
171 02 Praha 8 - Troja

No. of pages: 1
No. of annexes/No. of an. pages: 1/37

No. of the Test Report: 601205-01/01

Issued: 13. 6. 2016



TEST REPORT

Name of product: Luminaires for road and street lighting
Type of product: URBINO LED IP66
Ratings: 220-240 V, 50/60 Hz, 28, 37, 55, 84, 110 W, IP 66, class I
Serial number: ---
Manufacturer: LUG Light Factory Sp. z o.o.,
ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Production site: LUG Light Factory Sp. z o.o.,
ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Ordering firm: LUG Light Factory Sp. z o.o.,
ul. Gorzowska 11, 65-127 Zielona Góra, Poland
Number of tested samples: 1
Samples submitted on: ---
Location of testing: EZÚ
Tested from through
Other data: ---
The product was tested according to: IEC 60598-1:2014,
IEC 60598-2-3:2002,
EN 60598-1:2015,
EN 60598-2-3:2003+A1:2011,

Compiled by: Pavel Vodrážka



Approved by: Lukáš Burda
Testing laboratory
technical manager

Test results stated in the test report apply only to the tested subject and unless specified otherwise in the test report, the tests were performed using the method and under the conditions determined in the test regulations, technical norm, instructions for use and information provided by the manufacturer on the tested subject and using accessories required by the manufacturer.
Without written consent, this report must not be reproduced in any other way than as a whole.



Test Report issued under the responsibility of:



TEST REPORT
IEC 60598-2-3
Luminaires
Part 2: Particular requirements
Section 3: Luminaires for road and street lighting

Report Number..... : 601205-01/01

Date of issue : 13.06.02016

Total number of pages 37

Name of Testing Laboratory Elektrotechnický zkušební ústav s.p.
preparing the Report : Pod Lisem 129, 171 02 Praha 71 - Troja, Czech Republic

Applicant's name : LUG LIGHT FACTORY SP. Z O. O

Address : 65-127 Zielona Góra ul. Gorzowska 11; Polska

Test specification:

Standard : IEC 60598-2-3:2002 (Third Edition) + A1:2011 used in conjunction with IEC 60598-1:2014 (Eighth Edition)
EN 60598-2-3:2003 (Second Edition) +A1:2011 used in conjunction with EN 60598-1:2015

Test procedure : CB Scheme + ENEC

Non-standard test method : N/A

Test Report Form No. : IEC60598_2_3J

Test Report Form(s) Originator.... : Intertek Semko AB

Master TRF : 2014-09

Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	Luminaires for road and street lighting	
Trade Mark		
Manufacturer	LUG LIGHT FACTORY SP. Z O. O 65-127 Zielona Góra ul. Gorzowska 11; Polska	
Model/Type reference	URBINO LED IP66	
Ratings	220-240 V, 50/60 Hz, LED module 28, 37, 55, 84, 110 W, IP66,	
☐ CB Testing Laboratory:	Elektrotechnický zkušební ústav s.p	
Testing location/ address	Pod Lisem 129, 171 02 Praha 71-Troja, Czech Republic	
☐ Associated CB Testing Laboratory:		
Testing location/ address	---	
Tested by (name, function, signature)	Pavel Vodrážka	
Approved by (name, function, signature) ...:	Lukáš Burda	
☐ Testing procedure: TMP/CTF Stage 1:		
Testing location/ address	---	
Tested by (name, function, signature)		
Approved by (name, function, signature) ...:		
☐ Testing procedure: WMT/CTF Stage 2:		
Testing location/ address	---	
Tested by (name + signature)		
Witnessed by (name, function, signature) ..:		
Approved by (name, function, signature) ...:		
☐ Testing procedure: SMT/CTF Stage 3 or 4:		
Testing location/ address	---	
Tested by (name, function, signature)		
Witnessed by (name, function, signature) ..:		
Approved by (name, function, signature) ...:		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):

Annex 1: components (one page)

Annex 2: temperature measurements, thermal tests of Section 12 (two pages)

Annex 5: photo (for pages)

Annex 6: instruction (one page)

Summary of testing:**Tests performed (name of test and test clause):**

All required tests.

Testing location:

same address as on page 2.

Summary of compliance with National Differences:**List of countries addressed**

☐ The product fulfils the requirements of _____ (insert standard number and edition and delete the text in parenthesis, leave it blank or delete the whole sentence, if not applicable)

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Variants:**

Annex 4, Page 34

Test item particulars	
Classification of installation and use : Luminaires for road and street lighting	
Supply Connection : Terminal block	
..... :	
Possible test case verdicts:	
- test case does not apply to the test object : -- (Not applicable)	
- test object does meet the requirement : P (Pass)	
- test object does not meet the requirement : F (Fail)	
Testing	
Date of receipt of test item : 25.04.2016	
Date (s) of performance of tests : 16.5.2016+13.6.2016	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a ☒ comma / ☐ point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2-13:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : --	
General product information: Protection class: class I. Degree of protection: IP 66 Mounting position: column Supply connection: terminal block Used light source: LED module Tested luminaire: URBINO LED 130222.5L111.031	



IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

3.2 (0)	GENERAL TEST REQUIREMENTS		
3.2 (0.1)	Information for luminaire design considered	Standard Yes ☒ No ☐	—
3.2 (0.3)	More sections applicable	Yes ☐ No ☒	—

3.4 (2)	CLASSIFICATION		
3.4 (2.2)	Type of protection	Class I	—
3.4 (2.3)	Degree of protection	IP66	—
3.4 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes ☒ No ☐	—
3.4 (2.5)	Luminaire for normal use	Yes ☒ No ☐	—
	Luminaire for rough service	Yes ☐ No ☒	—
3.4 (-)	Modes of installation of road or street lighting		—
	a) on a pipe	Yes ☒ No ☐	—
	b) on a mast arm	Yes ☒ No ☐	—
	c) on a post top	Yes ☐ No ☐	—
	d) on span or suspension wires	Yes ☒ No ☒	—
	e) on a wall	Yes ☒ No ☐	—

3.5 (3)	MARKING		
3.5 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
3.5 (3.3)	Additional information		P
	Language of instructions		P
3.5 (3.3.1)	Combination luminaires		---
3.5 (3.3.2)	Nominal frequency in Hz		P
3.5 (3.3.3)	Operating temperature		---
3.5 (3.3.4)	Symbol or warning notice		---
3.5 (3.3.5)	Wiring diagram		P
3.5 (3.3.6)	Special conditions		---
3.5 (3.3.7)	Metal halide lamp luminaire – warning		---
3.5 (3.3.8)	Limitation for semi-luminaires		---
3.5 (3.3.9)	Power factor and supply current		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.5 (3.3.10)	Suitability for use indoors		---
3.5 (3.3.11)	Luminaires with remote control		---
3.5 (3.3.12)	Clip-mounted luminaire – warning		---
3.5 (3.3.13)	Specifications of protective shields		---
3.5 (3.3.14)	Symbol for nature of supply		---
3.5 (3.3.15)	Rated current of socket outlet		---
3.5 (3.3.16)	Rough service luminaire		---
3.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		---
3.5 (3.3.18)	Non-ordinary luminaires with PVC cable		---
3.5 (3.3.19)	Protective conductor current in instruction if applicable		---
3.5 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		---
3.5 (3.3.21)	Non-replaceable and non-user replaceable light sources information provided		---
	Cautionary symbol		---
3.5 (3.3.22)	Controllable luminaires, classification of insulation provided		---
3.5 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P
3.5 (-)	Additional information in instruction leaflet		
	a) Design attitude		P
	b) Weight		P
	c) Overall dimensions		P
	d) Maximum projected area if applicable		P
	e) Cross-sectional area of wires if applicable		P
	f) Suitability for indoors use		---
	g) Dimensions of the compartment		---
	h) Torque setting to be applied to bolts or screws		P
	i) Maximum mounting height		P
3.6 (4)	CONSTRUCTION		
3.6 (4.2)	Components replaceable without difficulty		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6 (4.3)	Wireways smooth and free from sharp edges		P
3.6 (4.4)	Lampholders		
3.6 (4.4.1)	Integral lampholder		---
3.6 (4.4.2)	Wiring connection		---
3.6 (4.4.3)	Lampholder for end-to-end mounting		---
3.6 (4.4.4)	Positioning		---
	- pressure test (N)		---
	After test the lampholder comply with relevant standard sheets and show no damage		---
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		---
	- bending test (N)		---
	After test the lampholder have not moved from its position and show no permanent deformation		---
3.6 (4.4.5)	Peak pulse voltage		---
3.6 (4.4.6)	Centre contact		---
3.6 (4.4.7)	Parts in rough service luminaires resistant to tracking		---
3.6 (4.4.8)	Lamp connectors		---
3.6 (4.4.9)	Caps and bases correctly used		---
3.6 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		---
3.6 (4.5)	Starter holders		
	Starter holder in luminaires other than class II		---
	Starter holder class II construction		---
3.6 (4.6)	Terminal blocks		
	Tails		---
	Unsecured blocks		---
3.6 (4.7)	Terminals and supply connections		
3.6 (4.7.1)	Contact to metal parts	terminal block with an insulating pad	P
3.6 (4.7.2)	Test 8 mm live conductor		P
	Test 8 mm earth conductor		P
3.6 (4.7.3)	Terminals for supply conductors		P
3.6 (4.7.3.1)	Welded method and material		
	- stranded or solid conductor		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- spot welding		---
	- welding between wires		---
	- Type Z attachment		---
	- mechanical test according to 15.8.2		---
	- electrical test according to 15.9		---
	- heat test according to 15.9.2.3 and 15.9.2.4		---
3.6 (4.7.4)	Terminals other than supply connection		---
3.6 (4.7.5)	Heat-resistant wiring/sleeves		---
3.6 (4.7.6)	Multi-pole plug		---
	- test at 30 N		---
3.6 (4.8)	Switches		
	- adequate rating		---
	- adequate fixing		---
	- polarized supply		---
	- compliance with IEC 61058-1 for electronic switches		---
3.6 (4.9)	Insulating lining and sleeves		
3.6 (4.9.1)	Retainment		---
	Method of fixing		---
3.6 (4.9.2)	Insulated linings and sleeves:		
	Resistant to a temperature > 20 °C to the wire temperature or		---
	a) & c) Insulation resistance and electric strength		---
	b) Ageing test. Temperature (°C)		---
3.6 (4.10)	Double or reinforced insulation		
3.6 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		---
	Safe installation fixed luminaires		---
	Capacitors and switches		---
	Interference suppression capacitors according to IEC 60384-14		---
3.6 (4.10.2)	Assembly gaps:		
	- not coincidental		---
	- no straight access with test probe		---
3.6 (4.10.3)	Retainment of insulation:		

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- fixed		---
	- unable to be replaced; luminaire inoperative		---
	- sleeves retained in position		---
	- lining in lampholder		---
3.6 (4.11)	Electrical connections and current-carrying parts		
3.6 (4.11.1)	Contact pressure		P
3.6 (4.11.2)	Screws:		
	- self-tapping screws		---
	- thread-cutting screws		---
3.6 (4.11.3)	Screw locking:		
	- spring washer		P
	- rivets		---
3.6 (4.11.4)	Material of current-carrying parts		P
3.6 (4.11.5)	No contact to wood or mounting surface		P
3.6 (4.11.6)	Electro-mechanical contact systems		---
3.6 (4.12)	Screws and connections (mechanical) and glands		
3.6 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		---
	Torque test: torque (Nm); part.....:	cover M4: 1,2 Nm	P
	Torque test: torque (Nm); part.....:		---
	Torque test: torque (Nm); part.....:		---
3.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		---
3.6 (4.12.4)	Locked connections:		
	- fixed arms; torque (Nm).....:		---
	- lampholder; torque (Nm)		---
	- push-button switches; torque 0,8 Nm.....:		---
3.6 (4.12.5)	Screwed glands; force (Nm)	3,25	P
3.6 (4.13)	Mechanical strength		
3.6 (4.13.1)	Impact tests:		
	- fragile parts; energy (Nm).....:	Optical part: 0,5	P
	- other parts; energy (Nm)	Body: 0,7	P
	1) live parts		P
	2) linings		---
	3) protection		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	4) covers		P
3.6 (4.13.3)	Straight test finger		P
3.6 (4.13.4)	Rough service luminaires		
	- IP54 or higher		---
	a) fixed		---
	b) hand-held		---
	c) delivered with a stand		---
	d) for temporary installations and suitable for mounting on a stand		---
3.6 (4.13.6)	Tumbling barrel		---
3.6 (4.14)	Suspensions, fixings and means of adjusting		
3.6 (4.14.1)	Mechanical load:		
	A) four times the weight		---
	B) torque 2,5 Nm		---
	C) bracket arm; bending moment (Nm)		---
	D) load track-mounted luminaires		---
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		---
	Metal rod. diameter (mm)		---
	Fixed luminaire or independent control gear without fixing devices		---
3.6 (4.14.2)	Load to flexible cables		
	Mass (kg)		---
	Stress in conductors (N/mm ²)		---
	Mass (kg) of semi-luminaire		---
	Bending moment (Nm) of semi-luminaire		---
3.6 (4.14.3)	Adjusting devices:		
	- flexing test; number of cycles		---
	- strands broken.....		---
	- electric strength test afterwards		---
3.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		---
3.6 (4.14.5)	Guide pulleys		---
3.6 (4.14.6)	Strain on socket-outlets		---
3.6 (4.15)	Flammable materials		

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- glow-wire test 650°C	See Test Table 3.15 (13.3.2)	---
	- spacing ≥ 30 mm		---
	- screen withstanding test of 13.3.1		---
	- screen dimensions		---
	- no fiercely burning material		---
	- thermal protection		---
	- electronic circuits exempted		---
3.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		
	a) construction		---
	b) temperature sensing control		---
	c) surface temperature		---
3.6 (4.16)	Luminaires for mounting on normally flammable surfaces		
	No lamp control gear	(compliance with Section 12)	---
3.6 (4.16.1)	Lamp control gear spacing:		
	- spacing 35 mm		P
	- spacing 10 mm		---
3.6 (4.16.2)	Thermal protection:		
	- in lamp control gear		P
	- external		---
	- fixed position		---
	- temperature marked lamp control gear	T120	P
3.6 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	---
3.6 (4.17)	Drain holes		
	Clearance at least 5 mm		---
3.6 (4.18)	Resistance to corrosion		
3.6 (4.18.1)	- rust-resistance		---
3.6 (4.18.2)	- season cracking in copper		---
3.6 (4.18.3)	- corrosion of aluminium		---
3.6 (4.19)	Igniters compatible with ballast		---
3.6 (4.20)	Rough service vibration		---
3.6 (4.21)	Protective shield		
3.6 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		---
	Shield of glass if tungsten halogen lamps		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6 (4.21.2)	Particles from a shattering lamp not impair safety		---
3.6 (4.21.3)	No direct path		---
3.6 (4.21.4)	Impact test on shield		---
	Glow-wire test on lamp compartment.....:	See Test Table 3.15 (13.3.2)	---
3.6 (4.22)	Attachments to lamps not cause overheating or damage		---
3.6 (4.23)	Semi-luminaires comply Class II		---
3.6 (4.24)	Photobiological hazards		
3.6 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		---
3.6 (4.24.2)	Retinal blue light hazard		
	Luminaires with E_{thr} :		---
	a) Fixed luminaires		---
	- distance x m, borderline between RG1 and RG2....:		---
	- marking and instruction according 3.2.23		---
	b) Portable and handheld luminaires		---
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		---
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		---
3.6 (4.25)	Mechanical hazard		
	No sharp point or edges		P
3.6 (4.26)	Short-circuit protection		
3.6 (4.26.1)	Adequate means of uninsulated accessible SELV parts		---
3.6 (4.26.2)	Short-circuit test with test chain according 4.26.3		
	Test chain not melt through		---
	Test sample not exceed values of Table 12.1 and 12.2		---
3.6 (4.27)	Terminal blocks with integrated screwless earthing contacts		
	Test according Annex V		---
	Pull test of terminal fixing (20 N)		---
	After test, resistance < 0,05 Ω		---
	Pull test of mechanical connection (50 N)		---
	After test, resistance < 0,05 Ω		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Voltage drop test, resistance < 0,05 Ω		---
3.6 (4.28)	Fixing of thermal sensing control		
	Not plug-in or easily replaceable type		---
	Reliably kept in position		---
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		---
	Not outside the luminaire enclosure		---
	Test of adhesive fixing:		
	Max. temperature on adhesive material (°C).....:		---
	100 cycles between t min and t max		---
	Temperature sensing control still in position		---
3.6 (4.29)	Luminaires with non-replaceable light source		
	Not possible to replace light source		---
	Live part not accessible after parts have been opened by hand or tools		---
3.6 (4.30)	Luminaires with non-user replaceable light source		
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		
	Minimum two fixing means		---
3.6 (4.31)	Insulation between circuits		
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		---
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		---
3.6 (4.31.1)	SELV circuits		
	Used SELV source		---
	Voltage $\leq$ ELV		---
	Insulating of SELV circuits from LV supply		---
	Insulating of SELV circuits from other non SELV circuits		---
	Insulating of SELV circuits from FELV		---
	Insulating of SELV circuits from other SELV circuits		---
	SELV circuits insulated from accessible parts according Table X.1		---
	Plugs not able to enter socket-outlets of other voltage systems		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Socket outlets does not admit plugs of other voltage systems		---
	Plugs and socket-outlets does not have protective conductor contact		---
3.6 (4.31.2)	FELV circuits		
	Used FELV source		---
	Voltage $\leq$ ELV		---
	Insulating of FELV circuits from LV supply		---
	FELV circuits insulated from accessible parts according Table X.1		---
	Plugs not able to enter socket-outlets of other voltage systems		---
	Socket outlets does not admit plugs of other voltage systems		---
	Socket-outlets does not have protective conductor contact		---
3.6 (4.31.3)	Other circuits		
	Other circuits insulated from accessible parts according Table X.1		---
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		---
	- conductive parts are connected together		---
	- test according 7.2.3 of above		---
	- conductive part not cause an electric shock in case of an insulation fault		---
	- equipotential bonding in master/slave applications		---
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		---
	- slave luminaire constructed as class I		---
3.6 (4.32)	Overvoltage protective devices		
	Comply with IEC 61643-11		---
	External to controlgear and connected to earth:		
	- only in fixed luminaires		---
	- only connected to protective earth		---
3.6.1 (-)	At least IP X3 or X5 respectively. IP :	IP66	P
	Column-integrated luminaires:		
	- parts below 2,5 m. IP :		---
	- parts above 2,5 m. IP :	min. 6 m, max. 10 m $\uparrow$: IP66	P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6.2 (-)	Suspension on span wires		---
3.6.3 (-)	Means for attaching the luminaire or external parts to its support appropriate to the weight		---
3.6.3.1 (-)	Static load test		
	- drag coefficient	1,2	P
	- loaded area (m ²)	0,039	P
	- used load (N)	77,5	P
	- measured deformation (cm/m)		P
	- no rotation		P
3.6.4 (-)	Adjustable lampholders		---
3.6.5 (-)	Luminaires installed above 5 m, glass covers shall be:		
	a) glass that fractures into small pieces (test according to 3.6.5.1), or		P
	b) glass having a high impact shock resistance (test according to 3.6.5.2), or		---
	c) protected by any means to retain glass fragments		---
	For tunnel luminaires 3.6.5.1 apply		---
	Method of protection declared by the manufacturer		P
3.6.5.1 (-)	Protection by the use of glass that fractures into small pieces		
	- number of particles is more than 40	51	P
3.6.5.2 (-)	Protection by the use of high impact resistant glass		
3.6.5.2.1 (-)	Glass covers have high mechanical strength		---
	Test according IEC 62262 with test apparatus according IEC 60068-2-75 with impact energy of 5J on preconditioned sample		---
3.6.5.2.2 (-)	Glass covers not break into large pieces		---
	- test according 3.6.5.1, number of particles is more than 20		P
3.6.6 (-)	Connection compartment of column-integrated luminaire		
	- provides adequate space		---
	- means for attachment		---
	- means for attachment of metal corrosion-resistant		---
3.6.7 (-)	Compliance with ISO standard or other		---
3.6.8 (-)	Doors of column-integrated luminaires:		
	- corrosion-resistant		---
	- opening only possible for an authorized person		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- impact test 5 Nm		---
	- sample show no damage		---
3.6.9 (-)	Column-integrated luminaire:		
	- dimension of the cable entry slot (mm)		---
	- cable path from the slot to the connection compartment (mm)		---
	- cable path free from obstruction that might cause abrasion of the cable		---

3.7 (11)	CREEPAGE DISTANCES AND CLEARANCES		
3.7 (11.2)	Creepage distances and clearances	See Table 3.7 (11.2)	
	Working voltage (V)	230	—
	Rated pulse voltage (kV)		—
	Voltage form	Sinusoidal ☒ Non-sinusoidal ☐	—
	PTI	< 600 ☒ ≥ 600 ☐	—
	Impulse withstand category (Normal category II) (Category III Annex U)	Category II ☒ Category III ☐	—

3.8 (7)	PROVISION FOR EARTHING		
3.8 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 Ω	0,011	P
	Self-tapping screws used		---
	Thread-forming screws		---
	Thread-forming screw used in a grove		---
	Earth makes contact first		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		---
	Protective earthing of the luminaire not via built-in control gear		---
3.8 (7.2.2 + 7.2.3)	Earth continuity in joints, etc.		---
3.8 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		---
3.8 (7.2.5)	Earth terminal integral part of connector socket		---
3.8 (7.2.6)	Earth terminal adjacent to mains terminals		P
3.8 (7.2.7)	Electrolytic corrosion of the earth terminal		---
3.8 (7.2.8)	Material of earth terminal		P
	Contact surface bare metal		P
3.8 (7.2.10)	Class II luminaire for looping-in		---
	Double or reinforced insulation to functional earth		---
3.8 (7.2.11)	Earthing core coloured green-yellow		---
	Length of earth conductor		---
3.8.1 (-)	Attachment prevented from rotation		P

3.9 (14)	SCREW TERMINALS		
	Separately approved; component list	(see Annex 1)	---
	Part of the luminaire	(see Annex 3)	---

3.9 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		
	Separately approved; component list	(see Annex 1)	P
	Part of the luminaire	(see Annex 4)	---

3.10 (5)	EXTERNAL AND INTERNAL WIRING		
3.10 (5.2)	Supply connection and external wiring		
3.10 (5.2.1)	Means of connection	Terminal block	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment		---
3.10 (5.2.2)	Type of cable		---
	Nominal cross-sectional area (mm ²)		---
	Cables equal to IEC 60227 or IEC 60245		---
3.10 (5.2.3)	Type of attachment, X, Y or Z		---
3.10 (5.2.5)	Type Z not connected to screws		---
3.10 (5.2.6)	Cable entries:		
	- suitable for introduction		P
	- adequate degree of protection		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.10 (5.2.7)	Cable entries through rigid material have rounded edges		---
3.10 (5.2.8)	Insulating bushings:		
	- suitably fixed		---
	- material in bushings		---
	- material not likely to deteriorate		---
	- tubes or guards made of insulating material		P
3.10 (5.2.9)	Locking of screwed bushings		---
3.10 (5.2.10)	Cord anchorage:		
	- covering protected from abrasion		---
	- clear how to be effective		---
	- no mechanical or thermal stress		---
	- no tying of cables into knots etc.		---
	- insulating material or lining		---
3.10 (5.2.10.1)	Cord anchorage for type X attachment:		
	a) at least one part fixed		---
	b) types of cable		---
	c) no damaging of the cable		---
	d) whole cable can be mounted		---
	e) no touching of clamping screws		---
	f) metal screw not directly on cable		---
	g) replacement without special tool		---
	Glands not used as anchorage		---
	Labyrinth type anchorages		---
3.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		---
3.10 (5.2.10.3)	Tests:		
	- impossible to push cable; unsafe		---
	- pull test: 25 times; pull (N).....:		---
	- torque test: torque (Nm)		---
	- displacement ≤ 2 mm		---
	- no movement of conductors		---
	- no damage of cable or cord		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- function independent of electrical connection		---
3.10 (5.2.11)	External wiring passing into luminaire		P
3.10 (5.2.12)	Looping-in terminals		---
3.10 (5.2.13)	Wire ends not tinned		---
	Wire ends tinned: no cold flow		---
3.10 (5.2.14)	Mains plug same protection		---
	Class III luminaire plug		---
	No unsafe compatibility		---
3.10 (5.2.16)	Appliance inlets (IEC 60320)		---
	Installation couplers (IEC 61535)		---
	Other appliance inlet or connector according relevant IEC standard		---
3.10 (5.2.17)	No standardized interconnecting cables properly assembled		---
3.10 (5.2.18)	Used plug in accordance with		
	- IEC 60083		---
	- other standard		---
3.10 (5.3)	Internal wiring		
3.10 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		
	- not delivered/ mounting instruction		---
	- factory assembled		P
	- socket outlet loaded (A).....:		---
	- temperatures:	(see Annex 2)	---
	Green-yellow for earth only		---
3.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		
	Cross-sectional area (mm ²).....:	0,5	P
	Insulation thickness		P
	Extra insulation added where necessary		---
3.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Adequate cross-sectional area and insulation thickness		---
3.10 (5.3.1.3)	Double or reinforced insulation for class II		P
3.10 (5.3.1.4)	Conductors without insulation		---
3.10 (5.3.1.5)	SELV current-carrying parts		---
3.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		P
3.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		---
	Joints, raising/lowering devices		---
	Telescopic tubes etc.		---
	No twisting over 360°		---
3.10 (5.3.3)	Insulating bushings:		
	- suitable fixed		---
	- material in bushings		---
	- material not likely to deteriorate		---
	- cables with protective sheath		---
3.10 (5.3.4)	Joints and junctions effectively insulated		---
3.10 (5.3.5)	Strain on internal wiring		---
3.10 (5.3.6)	Wire carriers		---
3.10 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		---
3.10.1 (-)	Cord anchorage if applicable		---
	- pull test: 25 times; pull (N)..... :		---
	- torque test: torque (Nm)..... :		---

3.11 (8)	PROTECTION AGAINST ELECTRIC SHOCK		
3.11 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		---
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		---
	Basic insulation only accessible under lamp or starter replacement		---
	Protection in any position		P
	Double-ended tungsten filament lamp		---
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		---
	Relevant warning according to 3.2.18 fitted to the luminaire		---
3.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		---
3.11 (8.2.3.a)	Class II luminaire:		
	- basic insulated metal parts not accessible during starter or lamp replacement		---
	- basic insulation not accessible other than during starter or lamp replacement		---
	- glass protective shields not used as supplementary insulation		---
3.11 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		---
3.11 (8.2.3.c)	SELV circuits with exposed current carrying parts:		
	Ordinary luminaire:		
	- touch current		---
	- no-load voltage		---
	Other than ordinary luminaire:		
	- nominal voltage		---
3.11 (8.2.4)	Portable luminaire have protection independent of supporting surface		---
3.11 (8.2.5)	Compliance with the standard test finger or relevant probe		---
3.11 (8.2.6)	Covers reliably secured		P
3.11 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$		---
	Portable plug connected luminaire with capacitor		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Other plug connected luminaire with capacitor		---
	Discharge device on or within capacitor		---
	Discharge device mounted separately		---

3.12 (12)	ENDURANCE TEST AND THERMAL TEST		
3.12.2 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 3.13		---
3.12 (12.3)	Endurance test:		
	- mounting-position	On pipe	---
	- test temperature (°C)	35	---
	- total duration (h)	168	---
	- supply voltage: Un factor; calculated voltage (V)	230	---
	- lamp used	LED module ML1500302	---
3.12 (12.3.2)	After endurance test:		
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		---
	- marking legible		P
	- no cracks, deformation etc.		P
3.12 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
3.12 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	---
3.12 (12.6)	Thermal test (failed lamp control gear condition):		
3.12 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		---
	- case of abnormal conditions		---
	- electronic lamp control gear		---
	- measured winding temperature (°C): at 1,1 Un		---
	- measured mounting surface temperature (°C) at 1,1 Un		---
	- calculated mounting surface temperature (°C)		---
	- track-mounted luminaires		---
3.12 (12.6.2)	Temperature sensing control		
	- case of abnormal conditions		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- thermal link		---
	- manual reset cut-out		---
	- auto reset cut-out		---
	- measured mounting surface temperature (°C).....:		---
	- track-mounted luminaires		---
3.12 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		
3.12 (12.7.1)	Luminaire without temperature sensing control		---
3.12 (12.7.1.1)	Luminaire with fluorescent lamp $\leq 70W$		---
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		
	- case of abnormal conditions.....:		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		---
	- Test with standard test finger after the test		---
	Test according to Annex W:		
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test.....:	See Table 3.15 (13.2.1)	---
3.12 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp $> 70W$, transformer $> 10 VA$		
	- case of abnormal conditions.....:		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un.....:		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test.....:	See Table 3.15 (13.2.1)	---
3.12 (12.7.1.3)	Luminaire with short circuit proof transformers $\leq 10 VA$		---
	- case of abnormal conditions.....:		—

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- Components retained in place after the test		---
	- Test with standard test finger after the test		---
3.12 (12.7.2)	Luminaire with temperature sensing control		
	- thermal link	Yes ☐ No ☐	---
	- manual reset cut-out	Yes ☐ No ☐	---
	- auto reset cut-out	Yes ☐ No ☐	---
	- case of abnormal conditions		---
	- highest measured temperature of fixing point/ exposed part (°C):		---
	Ball-pressure test	See Table 3.15 (13.2.1)	---
3.12.1 (-)	Temperature reduction if for outdoor use only		---
3.12.2 (-)	(See above)		---
3.12.3 (-)	Glass covers used within the thermal limits declared by the glass manufacturer		---

3.13 (9)	RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE		
3.13.1 (-)	If IP > IP 20 the order of tests as specified in clause 3.12		
3.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		---
	- classification according to IP	IP66	---
	- mounting position during test	On pipe	---
	- fixing screws tightened; torque (Nm)	M8: 20 Nm	---
	- tests according to clauses	9.2.2, 9.2.7	---
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		---
	b) no talcum in dust-tight luminaire	IP6X	P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		---
	d) i) For luminaires without drain holes – no water entry		---
	d) ii) For luminaires with drain holes – no hazardous water entry		---
	e) no water in watertight luminaire	IPX6	P
	f) no contact with live parts (IP 2X)		---
	f) no entry into enclosure (IP 3X and IP 4X)		---
	f) no contact with live parts (IP3X and IP4X)		---

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	g) no trace of water on part of lamp requiring protection from splashing water		---
	h) no damage of protective shield or glass envelope		P
3.13 (9.3)	Humidity test 48 h		P

3.14 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		
3.14 (10.2.1)	Insulation resistance test		---
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		---
	Insulation resistance (MΩ).....		---
	SELV		
	- between current-carrying parts of different polarity :		---
	- between current-carrying parts and mounting surface	>110	P
	- between current-carrying parts and metal parts of the luminaire	>110	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		---
	- Insulation bushings as described in Section 5		---
	Other than SELV		
	- between live parts of different polarity		---
	- between live parts and mounting surface.....	>550	P
	- between live parts and metal parts	>550	P
	- between live parts of different polarity through action of a switch		---
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		---
	- Insulation bushings as described in Section 5		
3.14 (10.2.2)	Electric strength test		P
	Dummy lamp		---
	Luminaires with ignitors after 24 h test		---
	Luminaires with manual ignitors		---
	Test voltage (V)		---
	SELV		

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- between current-carrying parts of different polarity :		---
	- between current-carrying parts and mounting surface	500	P
	- between current-carrying parts and metal parts of the luminaire	500	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		---
	- Insulation bushings as described in Section 5		---
	Other than SELV		
	- between live parts of different polarity		---
	- between live parts and mounting surface	1460	P
	- between live parts and metal parts	1460	P
	- between live parts of different polarity through action of a switch		---
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		---
	- Insulation bushings as described in Section 5		---
3.14 (10.3)	Touch current (mA)	< 0,004 mA	P
	Protective conductor current (mA)	0,005 mA	P

3.15 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		
3.15 (13.2.1)	Ball-pressure test	See Test Table 3.15 (13.2.1)	---
3.15 (13.3.1)	Needle-flame test (10 s)	See Test Table 3.15 (13.3.1)	---
3.15 (13.3.2)	Glow-wire test (650°C)	See Test Table 3.15 (13.3.2)	---
3.15 (13.4)	Proof tracking test (IEC 60112)	See Test Table 3.15 (13.4)	---