



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

Jinko Solar Import and Export Co., Ltd. or its affiliates (hereinafter referred to as "Jinko") generally provide the Warranties set forth herein to the original purchaser and its successors and permitted assigns (hereinafter referred to as "Customer") with respect to any solar photovoltaic module (hereinafter referred to as "Module") set forth herein sold by Jinko under purchase agreements signed on or after 19th September, 2025 subject to the terms and conditions herein (hereinafter referred to as "Limited Warranty"). Jinko and Customer may hereinafter be referred to each as a "Party" and collectively as the "Parties" .

This Limited Warranty is only applicable to Modules sold and/or delivered to European countries.

Types of Modules covered by this Limited Warranty						
Series	Module Type	Limited Product Warranty Period (Years)	Limited Power Warranty Period (Years)	First Year Degradation Rate	Annual Degradation Rate	Pmin At The End Of Power Warranty Period
Tiger Neo	JKMxxxN-54HL4M-BDV	15	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-48HL4M-BDV	15	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-51QL6-BDV	15	30	1.00%	0.35%	88.85%
Tiger Neo	JKMxxxN-54HL4R-BDB	25	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-66HL5-BDV	12	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-54HL4R-BDV	15	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-66HL4M-BDV	12	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-66HL4M-BDX	12	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-66QL6-BDV	12	30	1.00%	0.35%	88.85%
Tiger Neo	JKMxxxN-78HL4-BDV	12	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-72HL4-BDV	12	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-72HL4-BDV-U	12	30	1.00%	0.40%	87.40%
Tiger Neo	JKMxxxN-72HL4-BDX	12	30	1.00%	0.40%	87.40%
Tiger Pro	JKMxxM-72HL4-TV	12	30	2.00%	0.45%	84.95%
Tiger Pro	JKMxxxM-72HL4-BDVP	12	30	2.00%	0.45%	84.95%
Tiger P-type	JKMxxxM-7RL3-TV	12	30	2.00%	0.45%	84.95%

Table 1. Types of Modules covered by this Limited Warranty



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

1. LIMITED WARRANTY

1.1 Definitions and Table Description

Actual Power Output.

Actual Power Output means the power output of the Module, expressed in Watts, measured at STC at a given point in time in a year after the Warranty Start Date, corrected for any measurement error, as per IEC 61215.

Annual Degradation Rate.

For each year after the first year following the Warranty Start Date until the end of the applicable Limited Power Warranty Period, Jinko warrants that the Degradation Rate of Modules shall not exceed the applicable Annual Degradation Rate set forth at Table 1 applicable for each Module Type.

Degradation Rate.

Degradation Rate means any positive amount calculated in accordance with the following formula, expressed as a percent:

$$\text{Degradation Rate} = (\text{Nominal Power Output} - \text{Actual Power Output}) / \text{Nominal Power Output} \times 100\%$$

First Year Degradation Rate.

In the first year following the Warranty Start Date, the applicable maximum Degradation Rate of Modules set forth at Table 1.

Nominal Power Output.

Nominal Power Output means the original manufactured nameplate specification of power in the Module (Maximum Power, P_{max}), expressed in Watts, and measured at STC, excluding any specified positive tolerance.

Standard Test Conditions (STC).

① Air mass 1.5, ② Irradiance 1000W/m², ③ Cell Temperature 25°C

Warranty Start Date.

Jinko provides the Limited Warranty set forth herein commencing upon the earlier of one of the following dates:

- A. The date which is one hundred and eighty (180) days following the Module manufacture date, as indicated by the serial number[digit no. 7-11 (YYMDD)] starting from the left side of the serial number, with the letter corresponding to the month as indicated in the table below for such Module.

letter	A	B	C	D	E	F	G	H	J	K	L	M
month	1	2	3	4	5	6	7	8	9	10	11	12

- B. Delivery date of a Module to the original purchaser thereof.



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

P_{1st year,%}

P_{1st year,%} represents the warranted Actual Power Output of Modules at the end of the first year following the Warranty Start Date.

$$P_{1st\ year,\%} = 100\% * (1 - \text{First Year Degradation Rate})$$

P_{N year, %}

P_{N year, %} represents the warranted Actual Power Output of Modules at the end of a year (N) after the first year following the Warranty Start Date until the end of the applicable Limited Power Warranty Period as specified at Table 1.

$$P_{N\ year,\%} = 100\% * (1 - (\text{First Year Degradation Rate} + \text{Annual Degradation Rate} * (N-1))),$$

With N, 2 ≤ N ≤ Limited Power Warranty Period

1.2 Limited Product Warranty

Beginning on the Warranty Start Date and for the Limited Product Warranty Period, Jinko warrants that the Module and its respective DC connectors and cables (hereinafter referred to as the "Products") will be free from material defects in workmanship which impair the performance of the Products. Material defects shall not include changes in appearance or normal wear and tear of the Products.

1.3 Limited Power Warranty

Beginning on Warranty Start Date and for the first year following the Warranty Start Date, Jinko warrants that the Degradation Rate of Modules shall not exceed the applicable First Year Degradation Rate; for each year after the first year, the Degradation Rate of Modules shall not exceed the applicable Annual Degradation Rate, as set forth at Table 1.

2. Warranty Claim and Remedies

2.1 Warranty Claim

- a) Customer shall bear the burden of establishing a breach of the Limited Product Warranty or Limited Power Warranty (collectively, "Warranties"), and if Customer believes that there has been a breach of the Warranties, Customer shall promptly and no later than thirty (30) days via the after-sales online platform at <https://cs.jinkosolar.com> after knowledge thereof, provide notice to Jinko setting forth the following evidentiary documents or information related to the claim:
 - 1) Identifying information of the claimant;
 - 2) A detailed description of the claim;
 - 3) Supporting materials including photos of affected modules or testing reports;
 - 4) Serial number, types, and numbers of affected module;
 - 5) Evidence of purchase of the affected Module and Warranty Start Date;
 - 6) Initial installation location;
 - 7) Other supplementary information required by Jinko; and



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

8) Upon request by Jinko, the actual Module(s) allegedly causing the breach.

In the event that Customer fails to notify Jinko and provide the relevant information of (1)-(8) as described above, Jinko is entitled to refuse to process the relevant claim without any liability.

- b) Jinko will review and evaluate alleged claims after receipt of the claim and full information as stipulated herein. If Jinko at its sole discretion considers it necessary, Jinko can request the Modules be shipped to the Independent Testing Lab for testing. In the event Customer returns the Modules without written consent from Jinko, the risks (including but not limited to damage and loss of the Modules) and expenses related to the Modules shall be borne by Customer.
- c) Notwithstanding anything to the contrary herein, Jinko shall be entitled, in Jinko' s sole discretion upon written notice to Customer, to require that any breach of the Warranties alleged by Customer be reviewed by TÜV Rheinland, TÜ V SUD or other neutral third party testing laboratory selected by Jinko and approved by Customer, such approval not to be unreasonably withheld or delayed ("Independent Testing Lab"). The power measurement tolerance of any testing equipment utilized by any Independent Testing Lab in performing tests required by this Section 2.1 (c)] shall be disclosed in writing to both Parties prior to performance of any such tests and shall be reflected in any final test results provided by the Independent Testing Lab. The determination by an Independent Testing Lab as to whether a breach has occurred shall be final and conclusive with respect to the matters covered by such determination. In all measurements of Actual Power Output, the effect of test uncertainty needs to be considered as per IEC 61215.
- d) Jinko shall first bear reasonable testing costs incurred by the Independent Testing Lab pursuant to Section 2.1(c) hereto, including but not limited to shipping, testing services, and insurance. However, Customer shall promptly upon receipt of notice indemnify Jinko for all such costs on a dollar-for-dollar basis in the event that the Independent Testing Lab is unable to confirm a breach of the Warranties or, if no Independent Testing Lab was utilized, Customer is otherwise unable to establish a breach of the Warranties.
- e) Notwithstanding anything to the contrary in this Limited Warranty, Jinko shall not be liable to the successors and permitted assigns of the Limited Warranty for the portion of warranty benefits that arising from the similar root cause and has already been processed and/or enjoyed prior to the transfer of this Limited Warranty. For the avoidance of doubt, the benefits of the successors and permitted assigns of the Limited Warranty shall exclude the portion claimed by the previous Customer.

2.2 Remedies for Claims

- a) Remedies Option

In the event that the Module(s) breaches the Warranties, then Jinko shall, at its sole discretion, provide one of the following remedies:



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

- 1) Repair the defective Modules. In such case, Jinko shall prepare the repair project plan and carry out the repair project for the affected modules; or
- 2) Replace the defective Modules. In such case, the replacement modules' Actual Power Output shall be no less than the Theoretical Minimum Residual Warranty Power Output of the replaced Module(s)
Theoretical Minimum Residual Warranty Power Output= Nominal Power Output * (1 - (First Year Degradation Rate + Annual Degradation Rate * (N-1)))
Note: year N, $0 \leq N \leq$ Limited Power Warranty Period; or
- 3) Refund the **Residual Value** of the defective modules or refund the **Value Equivalent of the Output Gap** (Gap between the Theoretical Minimum Residual Warranty Power Output and the Actual Power Output of the defective Module(s))

Residual Value = Current Price (price-per-watt) * Nominal Power Output * (Left-over Limited Power Warranty Period / Limited Power Warranty Period)

Value Equivalent of Output Gap = Current Price (price-per-watt) * (Theoretical Minimum Residual Warranty Power Output – Actual Power Output)

The Current Price (price-per-watt) is determined by Jinko; or

- 4) Provide additional Module(s) to compensate for the power output loss for any Module which causes a breach of the Warranties.

b) Remedies Description

Unless otherwise agreed in writing, additional, repaired or replacement Modules shall be delivered to the same destination and on the same INCOTERMS 2020 delivery basis that the original Module causing breach of the Warranties was delivered under the purchase agreement to which this Limited Warranty applies. Replaced Modules received by Jinko pursuant to Section 2.2 shall be the sole property of Jinko. Jinko shall be solely responsible for all shipping costs incurred performing its additional supply, repair or replacement obligations under this Section 2.2(b). For avoidance of doubt, it is expressly stated here that any costs incurred due to dismantling, repacking, installation or re-installation the Module(s) and other related expenses shall be borne by the Customer. Additional or replacement Modules shall be of the same type and physical form as the original Module, electrically compatible with the original Module, and have an electrical output of not less than the warranted power output of the original Module at the time of supply or replacement, based on the warranted degradation rates set forth at Section 1 hereto. Notwithstanding the foregoing, if Jinko no longer supplies Modules meeting the foregoing criteria, then additional or replacement Modules provided under this Section 2.2(b) shall be those Modules then supplied by Jinko most substantially meeting the foregoing criteria. Jinko' s performance of any repair, replacement or additional supply pursuant to this Section 2.2(b) shall not extend the term of any Warranties.

Unless otherwise agreed upon in the underlying purchase agreement, Customer shall dispose of out-of-use Module (s) in accordance with applicable regulations on electronic waste treatment and disposal at its own cost and the same shall not be reworked, re-sold or re-used



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

in any way. If Jinko determines to retrieve such Modules, the ownership of same is deemed to belong to Jinko, and Jinko shall bear the transportation costs related with delivery of the Module(s) from their original place to the destination location designated by Jinko.

c) Exclusions

This Limited Warranty is subject to the exclusions set forth in this Section 2.2(c). The Warranties shall not apply to any Module or Products which have been:

- 1) Altered, repaired or modified without the prior written consent of Jinko or otherwise inconsistent with Jinko's written instructions; or
- 2) Used in a manner inconsistent with the version of Jinko Installation Manual available at <https://jinkosolar.eu> on the date the Module is manufactured; or
- 3) Removed and re-installed at any location other than the physical location in which it was originally installed following purchase by Customer or receipt from Jinko as a replacement Module; or
- 4) Subject to misuse, abuse, neglect, or accident except as may be caused by Jinko in the course of storage, transportation, handling, installation, application, use or service; or
- 5) Subject to power surges, lightning, floods, fires, natural disasters and other force majeure or module damage due to war, tampering, vandalism, accidental breakage, or other events beyond Jinko's control, resulting in material damages to the Module; or
- 6) Installed on mobile platforms (other than single or dual-axis trackers) or in a marine environment; or
- 7) Subject to direct contact with corrosive agents or salt water, pest damage, or malfunctioning PV system components; or
- 8) Exposure to voltage in excess to the maximum system voltage or power surges; or
- 9) Use of the Products in such a manner as to infringe Jinko's or any third party's intellectual property rights (including but not limited to patents, trademarks, etc.).

The Warranties shall not apply to any Module (and/or Product if applicable) for which the labels thereon indicating type or serial number have been altered, removed or made illegible. The Warranties shall not apply to any Module and Product for which full and final payment has not been received by Jinko or for Modules which are purchased through unauthorized sales channels or for Modules which are not genuine and are found to be counterfeit.

The Warranties only apply to Modules (and/or Products, if applicable) that remain within the original sales region where the Modules were delivered under the original purchase agreement between Jinko and Customer. The Warranties shall not apply to any Module (and/or Product, if applicable) that has been relocated outside of the original sales region.

3. LIMITS OF LIABILITY

NOTWITHSTANDING ANYTHING TO THE CONTRARY IN THIS LIMITED WARRANTY, EXCEPT AS EXPRESSLY PROVIDED HEREIN, JINKO MAKES NO WARRANTIES, GUARANTEES OR CONDITIONS, EXPRESS OR IMPLIED, ARISING FROM OR RELATING TO THE MODULES AND JINKO DISCLAIMS ANY WARRANTY OR GUARANTEE IMPLIED BY LAW, INCLUDING IMPLIED WARRANTIES OF



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

PERFORMANCE, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IMPLIED WARRANTIES OF CUSTOM OR USAGE, ARISING FROM OR RELATING TO THE MODULES. THE REMEDIES FOR BREACH OF THIS WARRANTY ARE CUSTOMER' S SOLE AND EXCLUSIVE REMEDIES ARISING FROM OR RELATING TO ANY BREACH OF THE WARRANTIES. IN NO EVENT SHALL JINKO BE RESPONSIBLE PURSUANT TO THIS WARRANTY FOR ANY PERFORMANCE ANALYSIS, INSPECTION, DIAGNOSIS, REMOVAL, CUSTOMS, IMPORT DUTIES, EXPORT DUTIES, TAXES, REINSTALLATION COSTS, SPECIAL, INDIRECT, INCIDENTAL, PUNITIVE, EXEMPLARY OR CONSEQUENTIAL DAMAGES OF ANY NATURE WHATSOEVER, INCLUDING LOSSES OR DAMAGES CAUSED BY REASON OF LOSS OF USE, LOSS OF PROFITS OR REVENUE, INTEREST CHARGES (EXCEPT AS EXPRESSLY PROVIDED HEREIN), LOSS OF BONDING CAPACITY, COST OF CAPITAL OR CLAIMS OF CUSTOMER DAMAGES, WHETHER LIABILITY ARISES AS A RESULT OF BREACH OF CONTRACT, TORT LIABILITY (INCLUDING NEGLIGENCE), STRICT LIABILITY, BY OPERATION OF LAW OR IN ANY OTHER MANNER. EXCEPT AS SET OUT IN THIS LIMITED WARRANTY, JINKO SHALL HAVE NO RESPONSIBILITY OR LIABILITY WHATSOEVER FOR DAMAGE OR INJURY TO PERSONS OR PROPERTY, OR FOR OTHER LOSS OR INJURY RESULTING FROM ANY CAUSE WHATSOEVER ARISING OUT OF OR RELATED TO THIS LIMITED WARRANTY.

4. ASSIGNMENT

Notwithstanding anything to the contrary herein, this Limited Warranty is for the sole and exclusive benefit of Customer and there are no third party beneficiaries hereof; provided, however, subject to written notice to Jinko and Jinko' s receipt of full and final payment for the Modules, this entire Limited Warranty may be assigned in whole but not in part to any person or entity. Any permitted assignee of this Limited Warranty shall execute such agreements as may reasonably be requested by Jinko to confirm the applicability of any term hereof as a condition to assignment.

5. LAW AND FORUM

Any dispute related to or arising out of this Limited Warranty, including without limitation any question regarding its existence, validity, breach, or termination, shall be referred to and finally resolved pursuant to the governing law clauses and dispute resolution procedures under the purchase agreement between the original purchaser and Jinko. As a condition to any obligation of Jinko hereunder, Jinko may require any Customer seeking to enforce this Limited Warranty to execute such additional agreements as may reasonably be required to enforce the terms of this Section 5.

6. MERGER CLAUSE

This Limited Warranty sets forth the entire agreement and understanding of the Parties relating to the subject matter herein and supersedes all prior or contemporaneous discussions, understandings and agreements, whether oral or written, between them relating to the subject matter hereof.



LIMITED WARRANTY

REV.EN20250919-LINEAR-BIFACIAL MODULE FOR EU

7. SEVERABILITY

If one or more provisions of this Limited Warranty are held to be unenforceable under applicable law, the Parties agree to renegotiate such provision in good faith. In the event that the Parties cannot reach a mutually agreeable and enforceable replacement for such provision, then (a) such provision shall be excluded from this Limited Warranty, (b) the balance of this Limited Warranty shall be interpreted as if such provision were so excluded and (c) the balance of this Limited Warranty shall be enforceable in accordance with its terms.

8. MISCELLANEOUS

The terms of this Limited Warranty are conditioned upon their incorporation in a contractual agreement between Jinko and Customer, and when incorporated to such contractual agreement, this Limited Warranty shall be subject to the terms thereof and subject to modification when incorporated therein. Jinko reserves the right to modify or update this Limited Warranty at any time, with or without notice.

Should Customer have any concerns or questions regarding this Limited Warranties, the Products, or the services provided by Jinko, please contact our aftersales department via email cs.eu@jinkosolar.com or cs.italy@jinkosolar.com.

[END OF LIMITED WARRANTY]



Product Service

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

Holder of Attestation: Jinko Solar Co., Ltd.

No.1, Yingbin Road, Economic Development Zone
334100 Shangrao City, Jiangxi
PEOPLE'S REPUBLIC OF CHINA

Name of Object:

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono Crystalline Silicon Photovoltaic (PV) Modules

This Attestation of Conformity is issued on a voluntary basis according to the Directive 2014/30/EU relating to electromagnetic compatibility. It confirms that the listed apparatus complies with the principal protection requirements of the directive and is based on the technical specifications applicable at the time of issuance. It refers only to the particular sample submitted for conformity assessment. For details see: www.tuvsud.com/ps-cert

Test report no.: 4840922243911

Date, 2025-11-14

(Ming Gu)

Page 1 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



Product Service

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

Model(s):

JKMxxxM-72L-BDV,
JKMxxxM-72-BDV,
(xxx=375-405, in steps of 5, 72 cells)

JKMxxxM-72HL-BDV,
JKMxxxM-72H-BDV,
(xxx=390-410, in steps of 5, 144 cells)

JKMxxxM-60L-BDV,
JKMxxxM-60-BDV,
(xxx=310-335, in steps of 5, 60 cells)

JKMxxxM-60HL-BDV,
JKMxxxM-60H-BDV,
(xxx=325-340, in steps of 5, 120 cells)

JKMxxxM-72L-BDVP,
JKMxxxM-72-BDVP,
(xxx=370-410, in steps of 5, 72 cells)

JKMxxxM-72HL-BDVP,
JKMxxxM-72H-BDVP,
(xxx=375-430, in steps of 5, 144 cells)

JKMxxxM-60L-BDVP,
JKMxxxM-60- BDVP,
(xxx=305-340, in steps of 5, 60 cells)

JKMxxxM-60HL-BDVP,
JKMxxxM-60H-BDVP,
(xxx=310-355, in steps of 5, 120 cells)

JKMxxxN-72H-MBB-BDV,
(xxx=390-415, in steps of 5, 144 cells)

JKMxxxN-60H-MBB-BDV,
(xxx=330-345, in steps of 5, 120 cells)

JKMxxxM-72H-MBB-BDVP,
(xxx=380-415, in steps of 5, 144 cells)

JKMxxxM-60H-MBB-BDVP,
(xxx=315-345, in steps of 5, 120 cells)

JKSN3-DDCA-xxx,
(xxx=405-435, in steps of 5, 156 cells)

JKSN3-CDCA-xxx,

Page 2 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



Product Service

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

(xxx=345-365, in steps of 5, 132 cells)

JKSM3-DDCA-xxx,
(xxx=405-430, in steps of 5, 156 cells)

JKSM3-CDCA-xxx,
(xxx=345-360, in steps of 5, 132 cells)

JKMxxxM-78H-BDVP,
(xxx=415-455, in steps of 5, 156 cells)

JKMxxxM-66H-BDVP,
(xxx=350-385, in steps of 5, 132 cells)

JKMxxxN-78H-BDV,
(xxx=415-460, in steps of 5, 156 cells)

JKMxxxN-66H-BDV,
(xxx=350-385, in steps of 5, 132 cells)

JKMxxxM-7RL3-BDVP,
JKMxxxM-7RL3- BDVP-J,
(xxx=440-465, in steps of 5, 156 cells)

JKMxxxM-6RL3- BDVP,
JKMxxxM-6RL3- BDVP-J,
(xxx=375-390, in steps of 5, 132 cells)

JKMxxxN-7RL3-BDV,
JKMxxxN-7RL3-BDV-J
(xxx=440-490, in steps of 5, 156 cells)

JKMxxxN-6RL3-BDV,
(xxx=375-410, in steps of 5, 132 cells)

JKMxxxM-78HL3-BDVP,
JKMxxxM-78HL3-MBB-BDVP,
(xxx=450-480, in steps of 5, 156 cells)

JKMxxxM-66HL3-BDVP,
JKMxxxM-66HL3-MBB-BDVP,
(xxx=380-405, in steps of 5, 132 cells)

JKMxxxM-72HLM-BDVP,
(xxx=415-460, in steps of 5, 144 cells)

JKMxxxM-60HLM-BDVP,
(xxx=345-380, in steps of 5, 120 cells)

Page 3 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

JKMxxxM-78HL4-BDVP,
(xxx=570-595, in steps of 5, 132 cells)

JKMxxxM-72HL4-BDVP,
JKMxxxM-72HL4-BDVP-J,
(xxx=500-575, in steps of 5, 144 cells)

JKMxxxM-66HL4-BDVP,
(xxx=460-500, in steps of 5, 132 cells)

JKMxxxM-60HL4-BDVP,
(xxx=420-455, in steps of 5, 120 cells)

JKMxxxM-54HL4-BDVP,
(xxx=375-410, in steps of 5, 108 cells)

JKMxxxM-7RL4-BDVP,
JKMxxxM-7RL4-BDVP-J,
(xxx=535-595, in steps of 5, 156 cells)

JKMxxxM-7TL4-BDVP,
JKMxxxM-7TL4-BDVP-J,
(xxx=500-565, in steps of 5, 144 cells)

JKMxxxM-6RL4-BDVP,
(xxx=460-500, in steps of 5, 132 cells)

JKMxxxM-6TL4-BDVP,
(xxx=420-455, in steps of 5, 120 cells)

JKMxxxM-5RL4-BDVP,
(xxx=375-410, in steps of 5, 108 cells)

JKMxxxN-78HL4-BDV,
JKMxxxN-78HL4-BDV-J
JKMxxxN-78HL4R-BDV
JKMxxxN-78HL4-BDV-IN
JKMxxxN-78HL4-BDV-IN1
(xxx=570-665, in steps of 5, 156 cells)

JKMxxxN-72HL4-BDV,
JKMxxxN-72HL4-BDV-J,
JKMxxxN-72HL4-BDV-U
JKMxxxN-72HL4R-BDV
JKMxxxN-72HL4-BDX
JKMxxxN-72HL4-BDV-IN
JKMxxxN-72HL4-BDV-IN1
(xxx=480-610, in steps of 5, 144 cells)

Page 4 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

JKMxxxN-66HL4-BDV,
(xxx=440-520, in steps of 5, 132 cells)

JKMxxxN-60HL4-BDV,
JKMxxxN-60HL4R-BDV
(xxx=400-505, in steps of 5, 120 cells)

JKMxxxN-54HL4-BDV,
JKMxxxN-54HL4R-BDV
JKMxxxN-54HL4R-BDB
(xxx=360-460, in steps of 5, 108 cells)

JKBSxxxN-48HL4-BDV,
(xxx=330-380, in steps of 5, 96 cells)

JKBSxxxN-22.5HL4-BDV,
(xxx=155-180, in steps of 5, 45 cells)

JKMxxxN-7RL4-BDV,
JKMxxxN-7RL4-BDV-J,
(xxx=535-595, in steps of 5, 156 cells)

JKMxxxN-7TL4-BDV,
JKMxxxN-7TL4R-BDV
JKMxxxN-7TL4-BDV-J,
(xxx=495-590, in steps of 5, 144 cells)

JKMxxxN-6RL4-BDV,
(xxx=455-500, in steps of 5, 132 cells)

JKMxxxN-6TL4-BDV,
(xxx=415-455, in steps of 5, 120 cells)

JKMxxxN-5RL4-BDV,
(xxx=375-410, in steps of 5, 108 cells)

JKMxxxM-72H-DV,
(xxx=390-415, in steps of 5, 144 cells)

JKMxxxM-60H-DV,
(xxx=325-345, in steps of 5, 120 cells)

JKMxxxM-72-DV,
(xxx=385-405, in steps of 5, 72 cells)

JKxxxM-66R5-BGV,
(xxx=630-665, in steps of 5, 132 cells)

JKxxxM-66H5-BGV,

Page 5 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

(xxx=635-670, in steps of 5, 132 cells)

JKBSxxxM-48HL4-BDVP
(xxx=335-375, in steps of 5, 96 cells)

JKBSxxxM-22.5HL4-BDVP
(xxx=160-175, in steps of 5, 45 cells)

JKMxxxN-60HL4-MDV,
JKMxxxN-60HL4R-MDV
(xxx=450-505, in steps of 5, 120 cells)

JKMxxxN-54HL4-MDV
JKMxxxN-54HL4R-MDV
(xxx=405-450, in steps of 5, 108 cells)

JKxxxN-66H5-BGV
JKMxxxN-66HL5-BDV
JKMxxxN-66HL5-BDV-IN
JKMxxxN-66HL5-BDV-S
JKMxxxN-66HL5-BDV-S1
(xxx=685-745, in steps of 5, 132 cells)

JKMxxxM-60HL4-MDVP
(xxx=450-465, in steps of 5, 120 cells)

JKMxxxM-54HL4-MDVP
(xxx=405-415, in steps of 5, 108 cells)

JKMxxxM-5RL4-MDVP
(xxx=405-415, in steps of 5, 108 cells)

JKMxxxN-5RL4-MDV
(xxx=420-430, in steps of 5, 108 cells)

JKMxxxN-66HL4M-BDV
JKMxxxN-66HL4M-BDX
JKMxxxN-66HL4M-BDV-IN
JKMxxxN-66HL4M-BDV-S
JKMxxxN-66HL4M-BDV-S1
(xxx=590-655, in steps of 5, 132 cells)

JKMxxxN-72HL4U-BDV
(xxx=590-610, in steps of 5, 144 cells)

JKBSxxxN-48HL4-BDVW
(xxx=370-395, in steps of 5, 96 cells)

Page 6 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



Product Service

Attestation of Conformity

No. E8A 118443 0008 Rev. 10

JKMxxxN-54HL4R-DB
(xxx=435-455, in steps of 5, 108 cells)

JKMxxxN-54HL4M-BDV
(xxx=495-535, in steps of 5, 108 cells)

JKMxxxN-48HL4M-BDV
(xxx=440-475, in steps of 5, 96 cells)

JKMxxxN-48HL4M-DB
(xxx=440-480, in steps of 5, 96 cells)

JKMxxxN-48HL4M-DV
(xxx=440-480, in steps of 5, 96 cells)

JKMxxxN-66QL6-BDV
(xxx=630-670, in steps of 5, 264 cells)

JKMxxxN-51QL6-DV
(xxx=480-515, in steps of 5, 204 cells)

JKMxxxN-51QL6-DB
(xxx=475-510, in steps of 5, 204 cells)

JKMxxxN-51QL6-BDV
(xxx=475-510, in steps of 5, 204 cells)

JKMxxxN-48QL6-DV
(xxx=450-480, in steps of 5, 192 cells)

JKMxxxN-48QL6-DB
(xxx=450-475, in steps of 5, 192 cells)

JKMxxxN-48QL6-BDV
(xxx=460-485, in steps of 5, 192 cells)

Description of Object:

Maximum Power (Pmax): 745W
 Maximum System Voltage: 1500V DC
 Protection Class: II

Tested according to:

EN IEC 61000-6-3:2021
 EN IEC 61000-6-1:2019

Page 7 of 7

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



Product Service

Attestation of Conformity

No. N8A 118443 0002 Rev. 20

Holder of Attestation: **Jinko Solar Co., Ltd.**

No.1, Yingbin Road, Economic Development Zone
334100 Shangrao City, Jiangxi
PEOPLE'S REPUBLIC OF CHINA

Product:

Crystalline Silicon Terrestrial Photovoltaic (PV) Modules

Mono-Crystalline Silicon Photovoltaic Module

This Attestation of Conformity is issued on a voluntary basis according to the Low Voltage Directive 2014/35/EU relating to electrical equipment designed for use within certain voltage limits. It confirms that the listed equipment complies with the principal protection requirements of the directive and is based on the technical specifications applicable at the time of issuance. It refers only to the particular sample submitted for conformity assessment. For details see: www.tuvsud.com/ps-cert

Test report no.: 704062217002-30

Date, 2025-10-07

(Zhulin Zhang)

Page 1 of 4

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.

Attestation of Conformity

No. N8A 118443 0002 Rev. 20

Model(s):

JKxxxxM-66R5-BGV (xxx=630-665, in steps of 5, 132 cells)
 JKxxxxM-66H5-BGV (xxx=635-670, in steps of 5, 132 cells)
 JKMxxxxN-78HL4-BDV, JKMxxxxN-78HL4R-BDV,
 JKMxxxxN-78HL4-BDV-J, JKMxxxxN-78HL4-BDV-IN,
 JKMxxxxN-78HL4-BDV-IN1 (xxx=570-665, in steps of 5, 156 cells)
 JKMxxxxN-72HL4-BDV, JKMxxxxN-72HL4-BDV-J,
 JKMxxxxN-72HL4-BDV-U, JKMxxxxN-72HL4R-BDV,
 JKMxxxxN-72HL4-BDX, JKMxxxxN-72HL4-BDV-IN,
 JKMxxxxN-72HL4-BDV-IN1 (xxx=480-610, in steps of 5, 144 cells)
 JKMxxxxN-66HL4-BDV (xxx=440-520, in steps of 5, 132 cells)
 JKMxxxxN-60HL4-BDV (xxx=400-505, in steps of 5, 120 cells)
 JKMxxxxN-60HL4R-BDV (xxx=400-505, in steps of 5, 120 cells)
 JKMxxxxN-54HL4-BDV (xxx=360-460, in steps of 5, 108 cells)
 JKMxxxxN-54HL4R-BDV (xxx=360-460, in steps of 5, 108 cells)
 JKMxxxxN-54HL4R-BDB (xxx=360-460, in steps of 5, 108 cells)
 JKMxxxxN-54HL4R-DB (xxx=435-455, in steps of 5, 108 cells)
 JKMxxxxN-7RL4-BDV, JKMxxxxN-7RL4-BDV-J
 (xxx=535-595, in steps of 5, 156 cells)
 JKMxxxxN-7TL4-BDV, JKMxxxxN-7TL4-BDV-J, JKMxxxxN-7TL4R-BDV
 (xxx=495-590, in steps of 5, 144 cells)
 JKMxxxxN-6RL4-BDV (xxx=455-500, in steps of 5, 132 cells)
 JKMxxxxN-6TL4-BDV (xxx=415-455, in steps of 5, 120 cells)
 JKMxxxxN-5RL4-BDV (xxx=375-410, in steps of 5, 108 cells)
 JKMxxxxM-72H-DV (xxx=390-415, in steps of 5, 144 cells)
 JKMxxxxM-60H-DV (xxx=325-345, in steps of 5, 120 cells)
 JKMxxxxM-7RL4-BDVP, JKMxxxxM-7RL4-BDVP-J
 (xxx=535-595, in steps of 5, 156 cells)
 JKMxxxxM-72HL4-BDVP, JKMxxxxM-72HL4-BDVP-J
 (xxx=500-575, in steps of 5, 144 cells)
 JKMxxxxM-66HL4-BDVP (xxx=460-500, in steps of 5, 132 cells)
 JKMxxxxM-60HL4-BDVP (xxx=420-455, in steps of 5, 120 cells)
 JKMxxxxM-54HL4-BDVP (xxx=375-410, in steps of 5, 108 cells)
 JKMxxxxM-7TL4-BDVP, JKMxxxxM-7TL4-BDVP-J
 (xxx=500-565, in steps of 5, 144 cells)
 JKMxxxxM-6RL4-BDVP (xxx=460-500, in steps of 5, 132 cells)
 JKMxxxxM-6TL4-BDVP (xxx=420-455, in steps of 5, 120 cells)
 JKMxxxxM-5RL4-BDVP (xxx=375-410, in steps of 5, 108 cells)
 JKMxxxxM-72HL-BDV (xxx=390-410, in steps of 5, 144 cells)
 JKMxxxxM-72H-BDV (xxx=390-410, in steps of 5, 144 cells)
 JKMxxxxM-60HL-BDV (xxx=325-340, in steps of 5, 120 cells)
 JKMxxxxM-60H-BDV (xxx=325-340, in steps of 5, 120 cells)
 JKMxxxxN-72H-MBB-BDV (xxx=390-415, in steps of 5, 144 cells)
 JKMxxxxN-60H-MBB-BDV (xxx=330-345, in steps of 5, 120 cells)
 JKMxxxxM-72HL-BDVP (xxx=375-430, in steps of 5, 144 cells)
 JKMxxxxM-72H-BDVP (xxx=375-430, in steps of 5, 144 cells)
 JKMxxxxM-60HL-BDVP (xxx=310-355, in steps of 5, 120 cells)
 JKMxxxxM-60H-BDVP (xxx=310-355, in steps of 5, 120 cells)
 JKMxxxxM-72H-MBB-BDVP (xxx=380-415, in steps of 5, 144 cells)
 JKMxxxxM-60H-MBB-BDVP (xxx=315-345, in steps of 5, 120 cells)
 JKSN3-DDCA-xxx (xxx=405-435, in steps of 5, 156 cells)
 JKSN3-CDCA-xxx (xxx=345-365, in steps of 5, 132 cells)
 JKSM3-DDCA-xxx (xxx=405-430, in steps of 5, 156 cells)
 JKSM3-CDCA-xxx (xxx=345-360, in steps of 5, 132 cells)
 JKMxxxxN-78H-BDV (xxx=415-460, in steps of 5, 156 cells)

Page 2 of 4

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.

Attestation of Conformity

No. N8A 118443 0002 Rev. 20

JKMxxxN-66H-BDV (xxx=350-385, in steps of 5, 132 cells)
 JKMxxxN-7RL3-BDV (xxx=440-490, in steps of 5, 156 cells)
 JKMxxxN-7RL3-BDV-J (xxx=440-490, in steps of 5, 156 cells)
 JKMxxxN-6RL3-BDV (xxx=375-410, in steps of 5, 132 cells)
 JKMxxxM-78H-BDVP (xxx=415-455, in steps of 5, 156 cells)
 JKMxxxM-66H-BDVP (xxx=350-385, in steps of 5, 132 cells)
 JKMxxxM-7RL3-BDVP, JKMxxxM-7RL3- BDVP-J
 (xxx=440-465, in steps of 5, 156 cells)
 JKMxxxM-6RL3- BDVP, JKMxxxM-6RL3- BDVP-J
 (xxx=375-390, in steps of 5, 132 cells)
 JKMxxxM-78HL3-BDVP, JKMxxxM-78HL3-MBB-BDVP
 (xxx=450-480, in steps of 5, 156 cells)
 JKMxxxM-66HL3-BDVP, JKMxxxM-66HL3-MBB-BDVP
 (xxx=380-405, in steps of 5, 132 cells)
 JKMxxxM-72HLM-BDVP (xxx=415-460, in steps of 5, 144 cells)
 JKMxxxM-60HLM-BDVP (xxx=345-380, in steps of 5, 120 cells)
 JKMxxxM-72L-BDV (xxx=375-405, in steps of 5, 72 cells)
 JKMxxxM-72-BDV (xxx=375-405, in steps of 5, 72 cells)
 JKMxxxM-60L-BDV (xxx=310-335, in steps of 5, 60 cells)
 JKMxxxM-60-BDV (xxx=310-335, in steps of 5, 60 cells)
 JKMxxxM-72L-BDVP (xxx=370-410, in steps of 5, 72 cells)
 JKMxxxM-72-BDVP (xxx=370-410, in steps of 5, 72 cells)
 JKMxxxM-60L-BDVP (xxx=305-340, in steps of 5, 60 cells)
 JKMxxxM-60-BDVP (xxx=305-340, in steps of 5, 60 cells)
 JKMxxxM-72-DV (xxx=385-405, in steps of 5, 72 cells)
 JKMxxxM-78HL4-BDVP (xxx=570-595, in steps of 5, 156 cells)
 JKBSxxxN-48HL4-BDV (xxx=330-380, in steps of 5, 96 cells)
 JKBSxxxN-22.5HL4-BDV (xxx=155-180, in steps of 5, 45 cells)
 JKBSxxxM-48HL4-BDVP (xxx=335-375, in steps of 5, 96 cells)
 JKBSxxxM-22.5HL4-BDVP (xxx=160-175, in steps of 5, 45 cells)
 JKMxxxN-60HL4-MDV (xxx=450-505, in steps of 5, 120 cells)
 JKMxxxN-60HL4R-MDV (xxx=450-505, in steps of 5, 120 cells)
 JKMxxxN-54HL4-MDV (xxx=405-450, in steps of 5, 108 cells)
 JKMxxxN-54HL4R-MDV (xxx=405-450, in steps of 5, 108 cells)
 JKxxxN-66H5-BGV (xxx=625-745, in steps of 5, 132 cells)
 JKMxxxN-66HL5-BDV, JKMxxxN-66HL5-BDV-IN
 (xxx=625-745, in steps of 5, 132 cells)
 JKMxxxM-60HL4-MDVP (xxx=450-465, in steps of 5, 120 cells)
 JKMxxxM-54HL4-MDVP (xxx=405-415, in steps of 5, 108 cells)
 JKMxxxM-5RL4-MDVP (xxx=405-415, in steps of 5, 108 cells)
 JKMxxxN-5RL4-MDV (xxx=420-430, in steps of 5, 108 cells)
 JKMxxxN-72HL4U-BDV (xxx=590-610, in steps of 5, 144 cells)
 JKMxxxN-66HL4M-BDV, JKMxxxN-66HL4M-BDX,
 JKxxxN-66HL4M-BDV-IN (xxx=590-655, in steps of 5, 132 cells)
 JKMxxxN-54HL4M-BDV (xxx=495-535, in steps of 5, 108 cells)
 JKMxxxN-48HL4M-BDV (xxx=440-475, in steps of 5, 96 cells)
 JKBSxxxN-48HL4-BDVW, (xxx=370-395, in steps of 5, 96 cells)
 JKMxxxN-48HL4M-DB (xxx=440-480, in steps of 5, 96 cells)
 JKMxxxN-48HL4M-DV (xxx=440-480, in steps of 5, 96 cells)
 JKMxxxN-66QL6-BDV (xxx=630-670, in steps of 5, 264 cells)
 JKMxxxN-51QL6-BDV (xxx=475-510, in steps of 5, 204 cells)
 JKMxxxN-51QL6-DV (xxx=480-515, in steps of 5, 204 cells)
 JKMxxxN-51QL6-DB (xxx=475-510, in steps of 5, 204 cells)
 JKMxxxN-48QL6-BDV (xxx=460-485, in steps of 5, 192 cells)

Page 3 of 4

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.



Product Service

Attestation of Conformity

No. N8A 118443 0002 Rev. 20

JKMxxxN-48QL6-DV (xxx=450-480, in steps of 5, 192 cells)

JKMxxxN-48QL6-DB (xxx=450-475, in steps of 5, 192 cells)

xxx is standing for rated output power at STC

Parameters:

Fire Safety Class: Class C according to UL790.

Safety Class: Class II

Max. System Voltage: 1500V DC

Construction: Framed or frameless, double glass with Junction box, cable and connector.

Tested according to:

EN IEC 61730-1:2018

EN IEC 61730-1:2018/AC:2018-06

EN IEC 61730-2:2018

EN IEC 61730-2:2018/AC:2018-06

Page 4 of 4

This Attestation does not replace the regulatory EU Declaration of Conformity (DoC) and does not allow for CE marking. After preparation of the necessary documentation and establishing compliance to requirements of all applicable directives, the manufacturer may sign a DoC and apply the CE marking. The DoC is issued under the sole responsibility of the manufacturer.

TiGER Neo

66HL4M-BDV

605-630 Watt

BIFACIAL MODULE WITH DUAL GLASS

N-type




N-Type Technology

N-Type modules with Tunnel Oxide Passivating Contacts (TOPCon) technology offer lower LID/LeTID degradation and better low light performance.



HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.

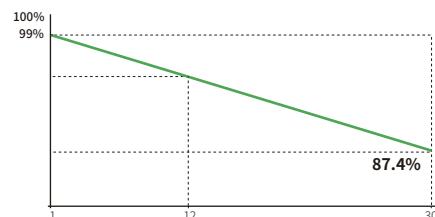

Dual-Sided Power Generation

Dual-sided power generation gain increases with backside exposure to light, significantly reducing LCOE.



Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Anti-PID Guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

12 Year
Product Warranty

30 Year
Linear Power Warranty

1%
First-year Degradation

0.40%
Annual Degradation Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



JKM605-630N-66HL4M-BDV-F5-EU

66HL4M-BDV 605-630 Watt

Mechanical Characteristics

Cell Type	N-type Mono-crystalline
No. of cells	132 (66×2)
Dimensions	2382×1134×30 mm
Weight	32.4 kg
Front Glass	2.0 mm, Anti-reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M / JK03M2 / Others*
Output Cables (Including Connector)	4.0 mm ² (+): 400 mm, (-): 200 mm or Customized Length

* MC4 and MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	2396×1110×1251 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallets, 72 pcs/stack, 720 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power - Pmax [Wp]	605	610	615	620	625	630
Maximum Power Voltage - Vmp [V]	40.31	40.46	40.60	40.74	40.88	41.02
Maximum Power Current - Imp [A]	15.01	15.08	15.15	15.22	15.29	15.36
Open-circuit Voltage - Voc [V]	48.48	48.68	48.88	49.08	49.28	49.48
Short-circuit Current - Isc [A]	15.90	15.96	16.02	16.08	16.14	16.20
Module Efficiency STC [%]	22.40	22.58	22.77	22.95	23.14	23.32
Power Sorting	0 ~ + 3 %					
Temperature Coefficient of Pmax	-0.29 %/°C					
Temperature Coefficient of Voc	-0.25 %/°C					
Temperature Coefficient of Isc	0.045 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)

Maximum Power - Pmax [Wp]	668	674	679	685	690	696
Maximum Power Voltage - Vmp [V]	40.29	40.46	40.59	40.75	40.88	41.04
Maximum Power Current - Imp [A]	16.58	16.66	16.73	16.81	16.88	16.95
Open-circuit Voltage - Voc [V]	48.46	48.66	48.86	49.06	49.26	49.46
Short-circuit Current - Isc [A]	17.56	17.64	17.70	17.77	17.83	17.90

BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25°C, AM=1.5

Application Conditions

Level T ₉₈ ≤ 70 °C	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35 A
Bifaciality Coefficients	φVoc: 98±5 %, φIsc: 80±5 %, φPmax: 80±5 %


*Short-term up to 85°C; higher operation requires IEC TS 63126 testing



© 2025 Jinko Solar Co., Ltd. All rights reserved.


Note: Please read the safety and installation manual before using the product. We reserve the right of final interpretation. The specifications in this datasheet are subject to change without notice.

Engineering Drawings

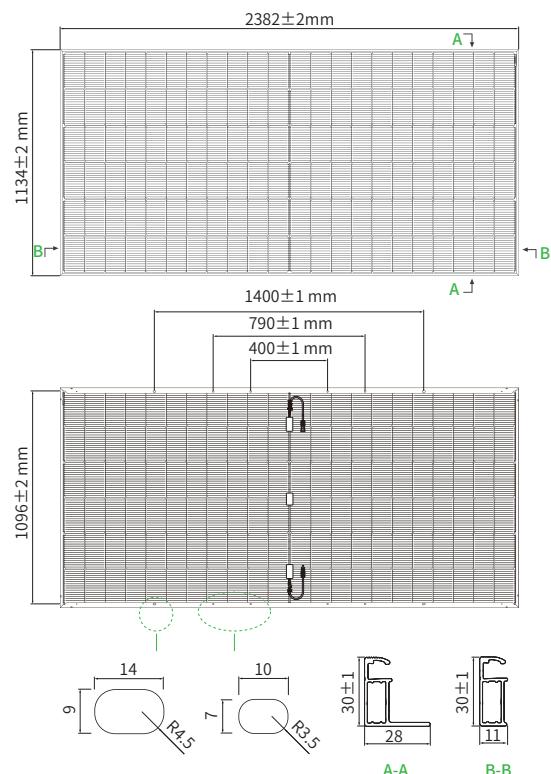

Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

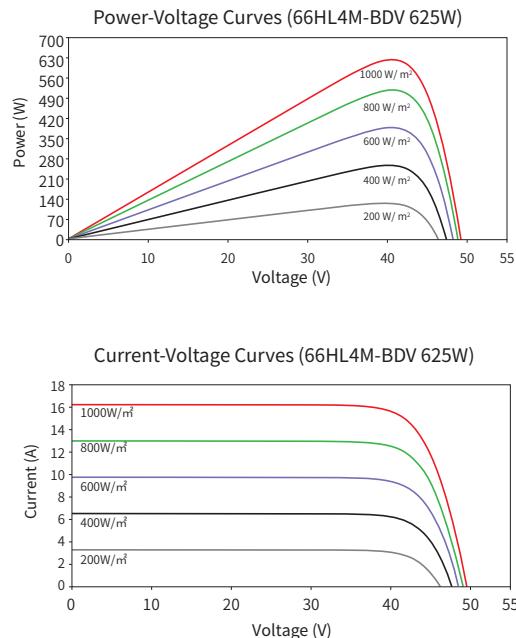

JKM605-630N-66HL4M-BDV-F5-EU

www.jinkosolar.com
www.jinkosolar.eu



晶科能源

www.jinkosolar.com


中国上海浦东新区杨高南路
428号2号楼16层
200127

16F, Building No. 2,
428# South Yang Gao Road,
Shanghai 200127, China

电话: (86) 21-6061 1799
传真: (86) 21-6876 1115

Tel: (86) 21-6061 1799
Fax: (86) 21-6876 1115

CE DECLARATION OF CONFORMITY

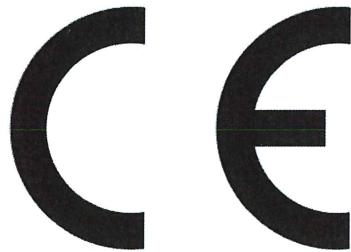

Business name of the manufacturer:

Jinko Solar Co., Ltd.

Full address of the manufacturer:

No.1 Yingbin Road, Economic Development Zone,
Shangrao City, 334100 Jiangxi, P. R. China

To whom it may concern

WE, Jinko Solar Co. Ltd., hereby declare under our sole responsibility that the product(s):

DESCRIPTION: Photovoltaic solar module

BRAND: JinkoSolar

SINGLE GLASS MODULES 1500VDC SYSTEM VOLTAGE-MODULE TYPE (S):

Tiger Neo

JKMxxxN-78HL4-V (xxx=570-650, in steps of 5, 156 cells)
JKMxxxN-72HL4-V (xxx=485-625, in steps of 5, 144 cells)
JKMxxxN-66HL4-V (xxx=445-525, in steps of 5, 132 cells)
JKMxxxN-60HL4-V (xxx=405-520, in steps of 5, 120 cells)
JKMxxxN-54HL4-V (xxx=365-460, in steps of 5, 108 cells)
JKMxxxN-78HL4-TV (xxx=570-645, in steps of 5, 156 cells)
JKMxxxN-72HL4-TV (xxx=480-605, in steps of 5, 144 cells)
JKMxxxN-66HL4-TV (xxx=440-525, in steps of 5, 132 cells)
JKMxxxN-60HL4-TV (xxx=400-480, in steps of 5, 120 cells)
JKMxxxN-54HL4-TV (xxx=360-430, in steps of 5, 108 cells)



晶科能源

www.jinkosolar.com

中国上海浦东新区杨高南路
428号2号楼16层
200127
16F, Building No. 2,
428# South Yang Gao Road,
Shanghai 200127, China

电话: (86) 21-6061 1799
传真: (86) 21-6876 1115
Tel: (86) 21-6061 1799
Fax: (86) 21-6876 1115

JKMxxxN-72HL4-B-V (xxx=510-535, in steps of 5, 144 cells)
JKMxxxN-66HL4-B-V (xxx=465-490, in steps of 5, 132 cells)
JKMxxxN-60HL4-B-V (xxx=425-445, in steps of 5, 120 cells)
JKMxxxN-54HL4-B-V (xxx=380-400, in steps of 5, 108 cells)

JKMxxxN-66HL4M-V (xxx=600-650, in steps of 5, 132 cells)
JKMxxxN-48HL4M-V (xxx=445-470, in steps of 5, 96 cells)

Tiger Neo R

JKMxxxN-78HL4R-V (xxx=570-650, in steps of 5, 156 cells)
JKMxxxN-72HL4R-V (xxx=485-625, in steps of 5, 144 cells)
JKMxxxN-60HL4R-V (xxx=405-520, in steps of 5, 120 cells)
JKMxxxN-54HL4R-V (xxx=365-460, in steps of 5, 108 cells)
JKMxxxN-78HL4R-TV (xxx=570-645, in steps of 5, 156 cells)
JKMxxxN-72HL4R-TV (xxx=480-605, in steps of 5, 144 cells)

SINGLE GLASS MODULES 1000VDC SYSTEM VOLTAGE-MODULE TYPE (S):

Tiger Neo

JKMxxxN-78HL4 (xxx=570-650, in steps of 5, 156 cells)
JKMxxxN-72HL4 (xxx=485-625, in steps of 5, 144 cells)
JKMxxxN-66HL4 (xxx=445-525, in steps of 5, 132 cells)
JKMxxxN-60HL4 (xxx=405-520, in steps of 5, 120 cells)
JKMxxxN-54HL4 (xxx=365-460, in steps of 5, 108 cells)
JKMxxxN-72HL4-B (xxx=510-535, in steps of 5, 144 cells)
JKMxxxN-66HL4-B (xxx=465-490, in steps of 5, 132 cells)
JKMxxxN-60HL4-B (xxx=425-470, in steps of 5, 120 cells)
JKMxxxN-54HL4-B (xxx=380-460, in steps of 5, 108 cells)

JKMxxxN-66HL4M (xxx=600-650, in steps of 5, 132 cells)

Tiger Neo R

JKMxxxN-78HL4R (xxx=570-650, in steps of 5, 156 cells)
JKMxxxN-72HL4R (xxx=485-625, in steps of 5, 144 cells)
JKMxxxN-60HL4R (xxx=405-520, in steps of 5, 120 cells)
JKMxxxN-54HL4R (xxx=365-460, in steps of 5, 108 cells)
JKMxxxN-54HL4R-B (xxx=380-460, in steps of 5, 108 cells)
JKMxxxN-78HL4R-TV (xxx=570-645, in steps of 5, 156 cells)



www.jinkosolar.com

中国上海浦东新区杨高南路
428号2号楼16层
200127

16F, Building No. 2,
428# South Yang Gao Road,
Shanghai 200127, China

电话: (86) 21-6061 1799
传真: (86) 21-6876 1115

Tel: (86) 21-6061 1799
Fax: (86) 21-6876 1115

DUAL GLASS MODULES 1500VDC SYSTEM VOLTAGE-MODULE TYPE (S):

Tiger Neo

JKMxxxN-78HL4-BDV (xxx=570-665, in steps of 5, 156 cells)

JKMxxxN-72HL4-BDV, JKMxxxN-72HL4-BDV-U, JKMxxxN-72HL4-BDX (xxx=480-610, in steps of 5, 144 cells)

JKMxxxN-66HL4-BDV (xxx=440-520, in steps of 5, 132 cells)

JKMxxxN-60HL4-BDV (xxx=400-505, in steps of 5, 120 cells)

JKMxxxN-54HL4-BDV (xxx=360-460, in steps of 5, 108 cells)

JKMxxxN-54HL4M-BDV (xxx=495-535, in steps of 5, 108 cells)

JKMxxxN-48HL4M-BDV (xxx=440-475, in steps of 5, 96 cells)

JKMxxxN-48HL4M-DB (xxx=440-480, in steps of 5, 96 cells)

JKMxxxN-48HL4M-DV (xxx=440-480, in steps of 5, 96 cells)

JKMxxxN-66HL4M-BDX (xxx=590-655, in steps of 5, 132 cells)

JKMxxxN-66HL4M-BDV (xxx=590-655, in steps of 5, 132 cells)

JKMxxxN-66HL5-BDV (xxx=625-745, in steps of 5, 132 cells)

JKMxxxN-66QL6-BDV (xxx=630-670, in steps of 5, 264 cells)

JKMxxxN-51QL6-BDV (xxx=480-515, in steps of 5, 204 cells)

JKMxxxN-51QL6-DV (xxx=480-515, in steps of 5, 204 cells)

JKMxxxN-51QL6-DB (xxx=475-510, in steps of 5, 204 cells)

JKMxxxN-48QL6-BDV (xxx=460-485, in steps of 5, 192 cells)

JKMxxxN-48QL6-DV (xxx=450-480, in steps of 5, 192 cells)

JKMxxxN-48QL6-DB (xxx=450-475, in steps of 5, 192 cells)

Tiger Neo R

JKMxxxN-78HL4R-BDV (xxx=570-665, in steps of 5, 156 cells)

JKMxxxN-72HL4R-BDV (xxx=480-610, in steps of 5, 144 cells)

JKMxxxN-60HL4R-BDV (xxx=400-505, in steps of 5, 120 cells)

JKMxxxN-54HL4R-BDV (xxx=360-460, in steps of 5, 108 cells)

JKMxxxN-54HL4R-DB (xxx=435-455, in steps of 5, 108 cells)

JKMxxxN-54HL4R-BDB (xxx=360-460, in steps of 5, 108 cells)



晶科能源
www.jinkosolar.com

中国上海浦东新区杨高南路
428号2号楼16层
200127
16F, Building No. 2,
428# South Yang Gao Road,
Shanghai 200127, China

电话: (86) 21-6061 1799
传真: (86) 21-6876 1115
Tel: (86) 21-6061 1799
Fax: (86) 21-6876 1115

MANUFACTURER: Jinko Solar Co. Ltd.

Are in conformity with the following standards:

THE LOW VOLTAGE EUROPEAN DIRECTIVE 2014/35/EU.

**THE ELECTROMAGNETIC COMPATIBILITY EUROPEAN DIRECTIVE 2014/30/EU.
(EN IEC 61000-6-3:2021 & EN IEC 61000-6-1:2019)**

IEC 61215-1: 2016 / :2021

EN IEC 61215-2:2021

IEC 61215-1-1: 2016 / :2021

EN IEC 61730-1:2018

IEC 61215-2: 2016 / :2021

EN IEC 61730-1:2018/AC:2018-06

IEC 61730-1: 2016 / :2023

EN IEC 61730-2:2018

IEC 61730-1: 2016 / :2023

EN IEC 61730-2:2018/AC:2018-06

EN IEC 61215-1:2021

EN IEC 61000-6-1:2019

EN IEC 61215-1-1:2021

EN IEC 61000-6-3:2021

CE MARK OF DATE: 2025

The institute TÜV SÜD Product Service GmbH, Ridlerstraße 65, 80339 München has certified the product(s). The technical documentation and full compliance with the standards listed above proves the conformity of the product with the requirements of the above-mentioned EC Council directive.

This document has been issued in English. In case of translation discrepancy of this document, the English version shall prevail.

Date of issue:

October 28th 2025

Place of issue

China

Title - Name -
Signature

P-Gen Miao



C E R T I F I C A T E

of Conformity



Registration No.: A3 50589865 0001

Report No.: CN23RKCG 001

Holder: Hangzhou Livoltek Power Co.,Ltd
1418-35 Moganshan Road,
Hangzhou,
310011 Zhejiang
P.R. China

Product: PV-Inverter
(ON-GRID SOLAR INVERTER)

Identification:

Type Designation:	GT3-xKD1
	: (x=4, 5, 6, 8, 10, 12, 15, 17, 20, 22, 25)
Firmware Version:	DSP Master : GT31LTK1ACA_Ver0.36
	: DSP Slave : GT31LTK1DCA_Ver2.02
	: ARM : GT31LTK1COA_Ver0.29
Serial No.	: Engineering samples
Remark(s)	: Refer to report CN23RKCG 001 for details.

Tested acc. to: EN 50549-1:2019

The certificate of conformity refers to the above mentioned product. This is to certify that the specimen is in conformity with the assessment requirement mentioned above. This certificate does not imply assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity.

Date 20.06.2023

Durch die DAkkS nach
DIN EN ISO/IEC 17065:2013
akkreditierte Zertifizierungsstelle.
Die Akkreditierung gilt nur für den in der
Urkundenanlage D-ZE-14169-01-02
aufgeführten Akkreditierungsumfang.

Certification Body

A handwritten signature in blue ink, appearing to read 'A. Chen'.

A. Chen

TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg

Certificate No.: A3 50589865 0001

Certificate Of Conformity

License Holder: Hangzhou Livoltek Power Co., Ltd.
1418-35 Moganshan Road, Hangzhou, 310011 Zhejiang, P.R. China

Type of product: ON-GRID SOLAR INVERTER

Model: GT3-xKD1(x=4, 5, 6, 8, 10, 12, 15, 17, 20, 22, 25)

Firmware version:
DSP Master : GT31LTK1ACA_Ver0.36
DSP Slave : GT31LTK1DCA_Ver2.02
ARM : GT31LTK1COA_Ver0.29

Standard: EN 50549-1 : 2019

Report No.: CN23RKCG 001

Date of issue: 2023.06.20

The verification of conformity refers to the above mentioned product. This is to verify that the specimen is in conformity with the assessment requirement mentioned above. This verification does not imply assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity.


A. Chen
Certifier



TÜV Rheinland LGA Products GmbH
Am Grauen Stein 29 · 51105 Köln · Germany

 **TÜVRheinland®**
Precisely Right.

C E R T I F I C A T E

of Conformity



Registration No.: AK 50589864 0001

Report No.: CN23RKCG 001

Holder: Hangzhou Livoltek Power Co.,Ltd
1418-35 Moganshan Road,
Hangzhou,
310011 Zhejiang
P.R. China

Product: PV-Inverter
(ON-GRID SOLAR INVERTER)

Identification:

Type Designation:	GT3-xKD1
	: (x=4, 5, 6, 8, 10, 12, 15, 17, 20, 22, 25)
Firmware Version:	DSP Master: GT31LTK1ACA_Ver0.36
	: DSP Slave: GT31LTK1DCA_Ver2.02
	: ARM: GT31LTK1COA_Ver0.29
Serial No.	: Engineering samples
Remark(s)	: Refer to report CN23RKCG 001 for details.

Tested acc. to: EN 50549-10:2022

The certificate of conformity refers to the above mentioned product. This is to certify that the specimen is in conformity with the assessment requirement mentioned above. This certificate does not imply assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity.

Certification Body

Date 20.06.2023

A handwritten signature in blue ink, appearing to read "A. Chen".



TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg