

Atlantic / Round

Classic water heater benefiting from all Atlantic know-how



+ PRODUCT

COMFORT

- Classic water heater benefiting from all Atlantic know-how
- French style design
- Flat chromed thermometer

QUALITY - DURABILITY

- Magnesium anode for strengthened tank protection
- Diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS

- IP 24 – full compliance with European standards for electrical safety and user protection
- Plug*
- Heating light indicator

SAVINGS

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

ELECTRIC WATER HEATER

30 TO 120 L (VERTICAL WALL-MOUNTED)

50 TO 100 L (HORIZONTAL WALL-MOUNTED)



- 1 External thermometer
- 2 Diamond-quality enamel (glass-lined inner tank)
- 3 Optimised stainless outlet pipe
- 4 Magnesium anode
- 5 Sheathed immersion heating element
- 6 Inlet diffuser
- 7 Heating light indicator
- 8 High-density polyurethane foam 0% CFC

TECHNICAL DATA


CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (kWh/24 h AT 65°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)
Vertical wall-mounted				
30	1200	230 (220/240)	0.63	1h19
50	1500	230 (220/240)	0.95	2h04
80	1500	230 (220/240)	1.40	3h28
100	1500	230 (220/240)	1.85	4h11
120	1500	230 (220/240)	2.15	5h17
Horizontal wall-mounted				
50	1500	230 (220/240)	1.15	1h48
80	1500	230 (220/240)	1.55	2h53
100	1500	230 (220/240)	1.95	3h58

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (Kg)	ERP ENERGY CLASS	PROFILE
	A	B	C	D	E	F	G				
Vertical wall-mounted											
30	448	433	248	451	158	300	239	72	11.5	C	S
50	612	433	382	451	158	300	239	72	15	C	M
80	859	433	592	451	158	300	239	72	21	C	L
100	1021	433	742	451	158	300	239	72	24	C	L
120	1184	433	917	451	158	300	239	72	29	C	L
Horizontal wall-mounted											
50	596	433	198	451	228	346	-	72	15	C	M
80	843	433	349	451	228	346	-	72	21	C	M
100	1005	433	497	451	228	346	-	72	24	C	L

CE ENE IP 24

INSTALLATION DIMENSIONS (mm)

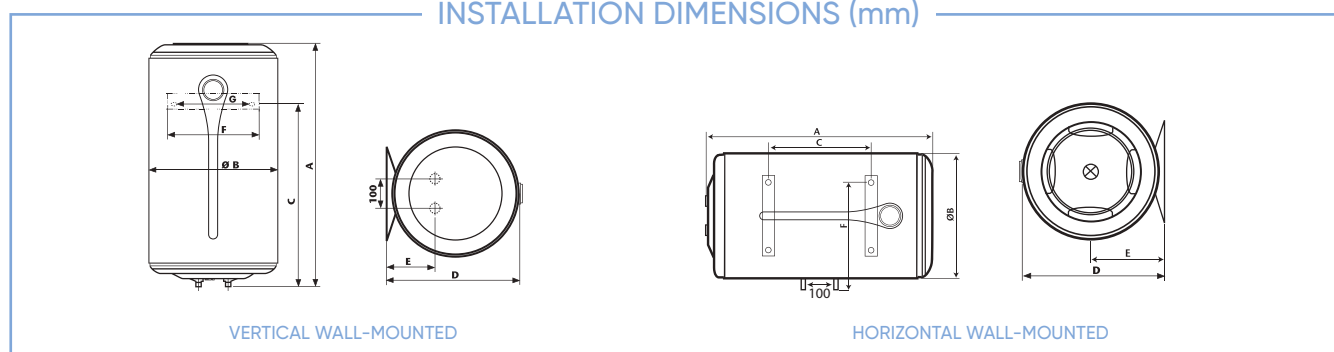

*Depending on models