


RubiconTM

Support Catheter

**Boston
Scientific**
Advancing science for lifeTM

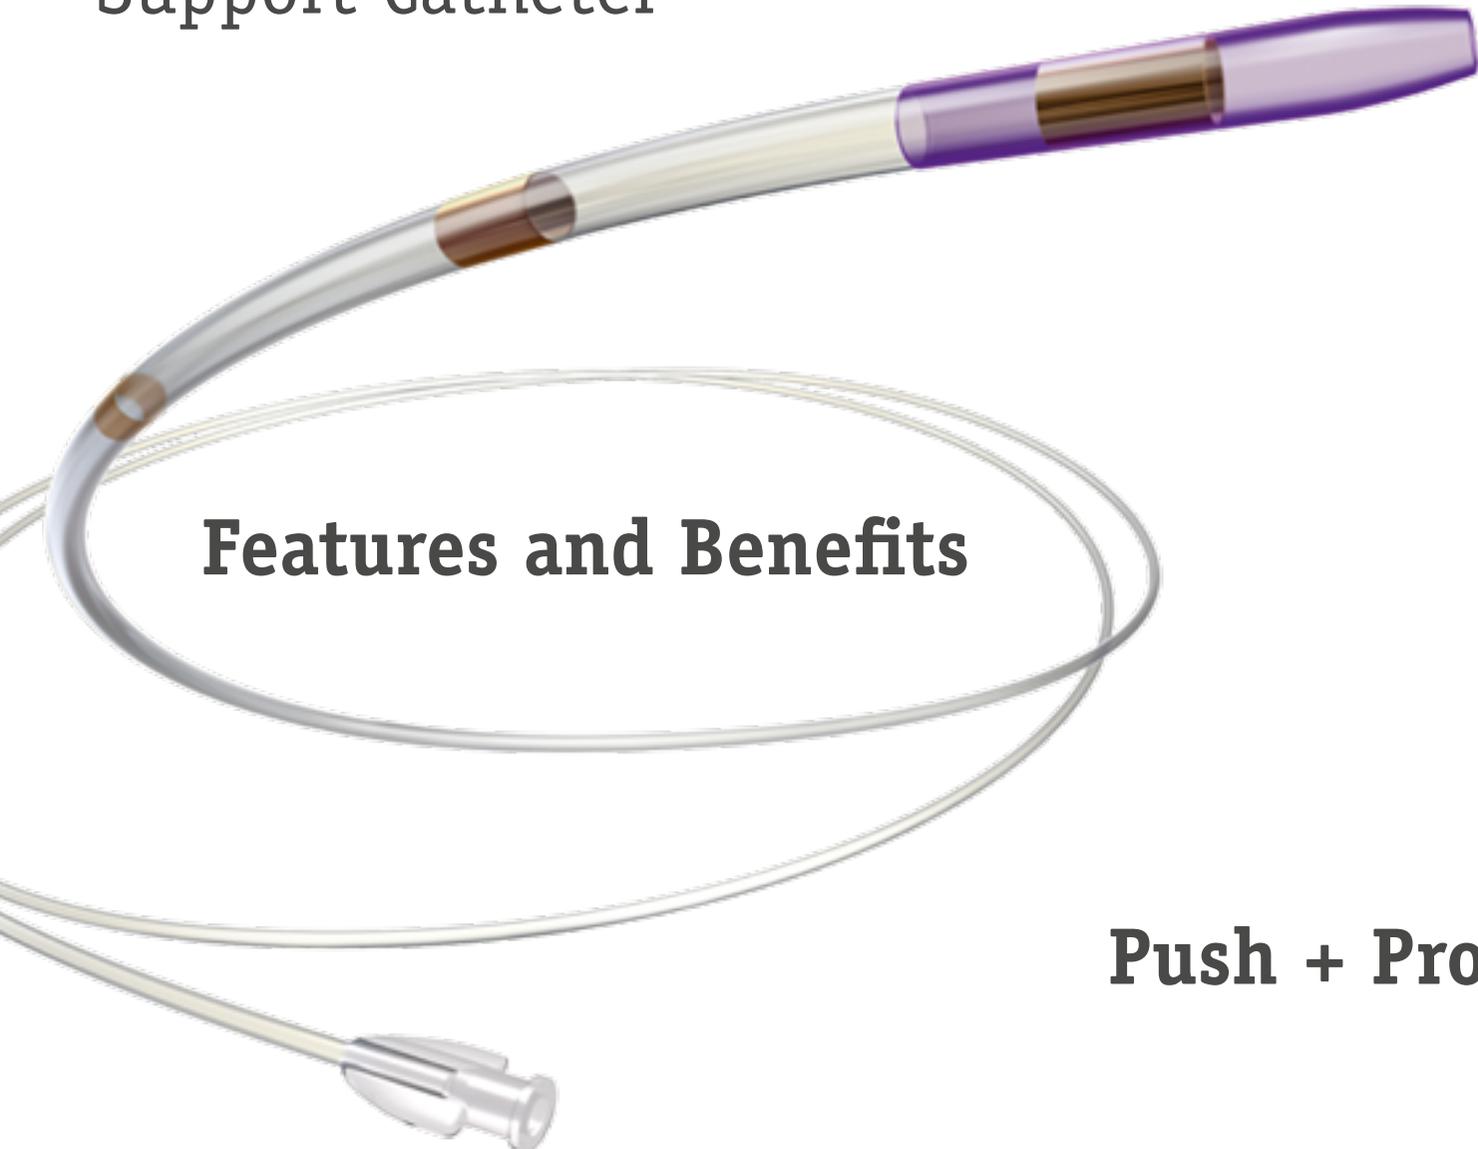


Features and Benefits

Push + Profile = Performance


Rubicon™ Support Catheter TIP

- Tapered purple tip designed for excellent visibility and ultra-smooth guidewire transition
- **RUBICON 35 SUPPORT CATHETER:** 0.037" (0.95 mm) lesion entry profile
- **RUBICON 18 SUPPORT CATHETER:** 0.022" (0.56 mm) lesion entry profile
- **RUBICON 14 SUPPORT CATHETER:** 0.018" (0.46 mm) lesion entry profile

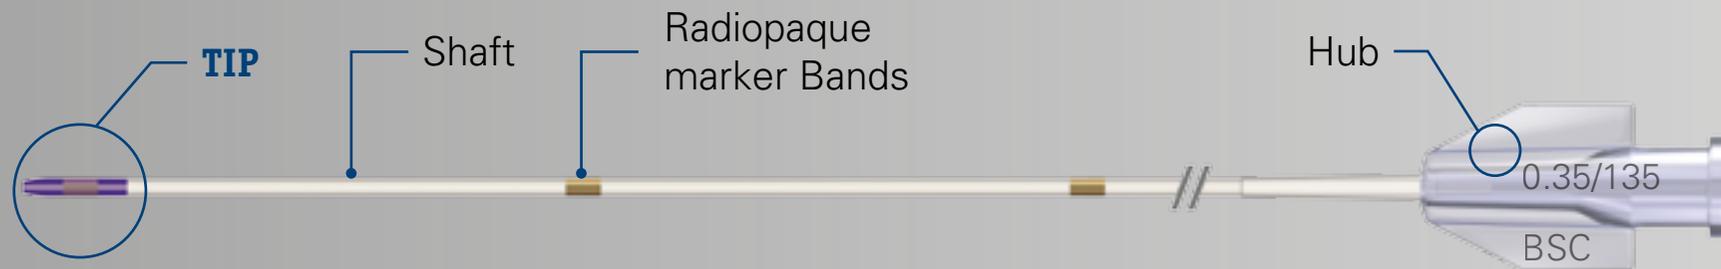

Rubicon™ Support Catheter SHAFT

- Bioslide™ hydrophilic coating on distal 40 cm designed to facilitate crossing complex lesions
- Full family offering
 - 0.035" (0.90 mm), 0.018" (0.46 mm), 0.014" (0.36 mm) diameters
 - 65 cm, 90 cm, 135 cm, 150 cm lengths

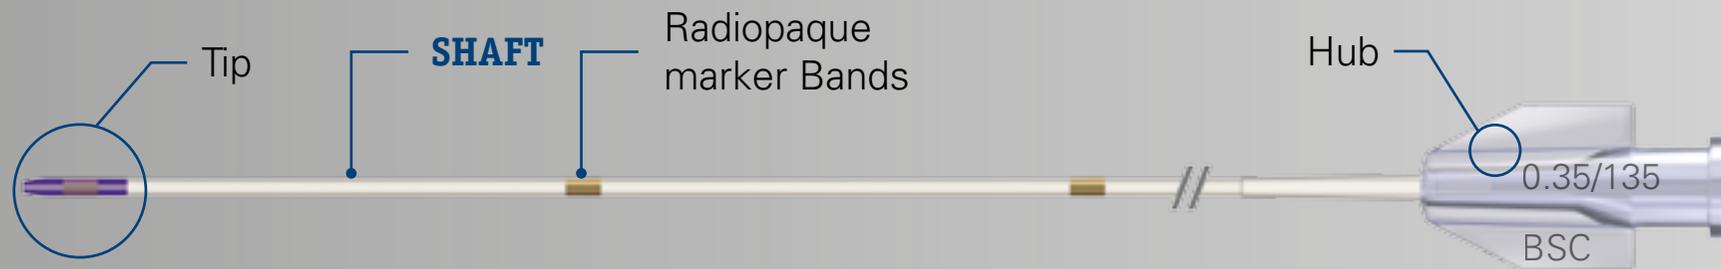

Rubicon™ Support Catheter RADIOPAQUE MARKER BANDS

- **Three radiopaque marker bands**


- 50 mm spacing on 0.035" (0.90 mm) catheters
- 15 mm spacing on 0.018" (0.46 mm) and 0.014" (0.36 mm) catheters



Rubicon™ Support Catheter HUB



- Clear shaft and hub to enable visualization of blood return
- Diameters and lengths clearly labeled and easy to identify

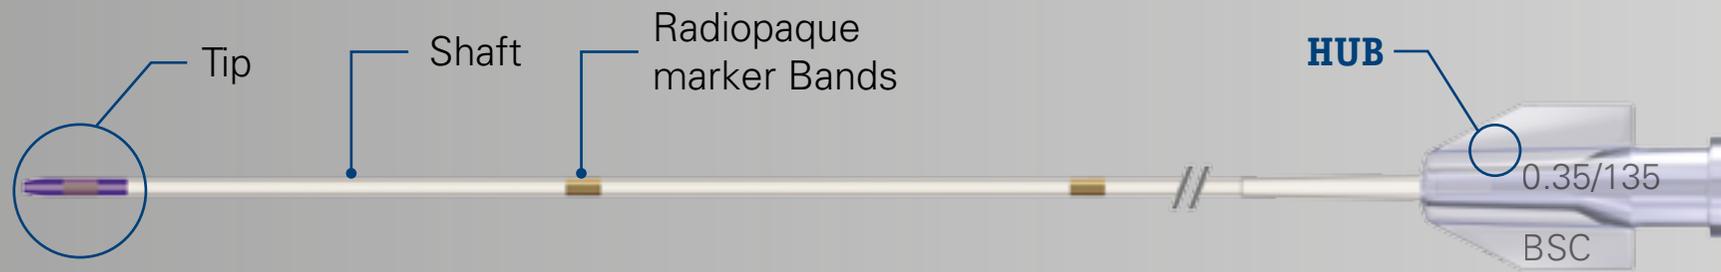

Rubicon™ Support Catheter

PRODUCT INFORMATION

Wire Compatibility	Catheter Length	Sheath Compatibility	UPN (5 per box)
0.035" (0.90 mm)	65 cm	5F (1.7 mm)	H749 39240035061
0.035" (0.90 mm)	90 cm	5F (1.7 mm)	H749 39240035091
0.035" (0.90 mm)	135 cm	5F (1.7 mm)	H749 39240035131
0.035" (0.90 mm)	150 cm	5F (1.7 mm)	H749 39240035151
0.018" (0.46 mm)	90 cm	4F (1.33 mm)	H749 39239018091
0.018" (0.46 mm)	135 cm	4F (1.33 mm)	H749 39239018131
0.018" (0.46 mm)	150 cm	4F (1.33 mm)	H749 39239018151
0.014" (0.36 mm)	135 cm	4F (1.33 mm)	H749 39212014131
0.014" (0.36 mm)	150 cm	4F (1.33 mm)	H749 39212014151

Rubicon is a registered trademark of Boston Scientific or its affiliates.
All other trademarks are the property of their respective owners.

CAUTION: the law restricts these devices to sale by or on the order of a physician. Indications, contraindications, warnings and instructions for use can be found in the product labeling supplied with each device. Information for the use only in countries