

WATER PUMPS



■ ANTRAC
ANT WP 50 30



■ ANTRAC
ANT WP 80 30



■ ANTRAC
ANT WP 80 30BD



■ ANTRAC
ANT WP 100 30



■ ANTRAC
ANT WP 100 30 E



MODEL		ANT WP 50 30	ANT WP 80 30	ANT WP 80 30BD	ANT WP 100 30	ANT WP 100 30E
Engine		ANT 247 Diesel	ANT 296 Diesel	ANT 296 Diesel	ANT 418 Diesel	ANT 418 Diesel
Max. Power	(kW)	3.8	4.4	4.4	7	7
Engine Rotation	(rpm)	3,600	3,600	3,600	3,600	3,600
Pump Inlet Diameter	(inch)	2	3	3	4	4
Pump Outlet Diameter	(inch)	2	3	3	4	4
Efficient Operating Range	Flow	(m³/h)	28	42	75	75
	Head	(m)	26	28	25	25
Fuel Tank	(l)	2.5	3.5	14	14	14
Suction Head	(m)	5-7	5-7	5-7	4.5	4.5
Full Load Hours		1.5	2.25	9	8	8
Net Weight / Gross Weight	(kg)	34/36	65/69	65/69	60/62	72/76
Dimensions	(mm)	530 x 445 x 550	565 x 460 x 550	565 x 460 x 735	680 x 520 x 660	680 x 520 x 660

Please contact us for alternative versions.

WATER PUMPS

WT40X



▶ WB30XT DRX



MODEL	WB20XT DRX	WB30XT DRX	WX10	WH15X	WH20X	WT30X	WT40X
Tip	DRX	DRX	D1	DRX	DE	DE	DE
POMPA							
Giriş-Çıkış Çapı (mm)	50 (2 inç)	80 (3 inç)	25 (1 inç)	40 (1,5 inç)	50 (2 inç)	80 (3 inç)	100 (4 inç)
Maks. Basma Yüksekliği (m)	32	23	35	50	50	27	26
Emiş Derinliği (m)	8	8	8	8	8	8	8
Maks. Debi (lt/dk)	620	1.100	140	400	500	1.200	1.600
MOTOR							
Model	GX 120T	GX 160 T2	GX 25	GX 120	GX 160	GX 240 T2	GX 340
TİP							
Silindir Hacmi (cm³)	118	163	25	118	163	242	337
Maks. Çıkış Gücü (BG@d/dk.)	4 @ 3.600	5.5 @ 3.600	1,5 @ 7.000	4 @ 3.600	5.5 @ 3.600	8 @ 3.600	11 @ 3.600
Yakıt Depo Kapasitesi (lt)	2	3,1	0,55	2	3,1	5,3	6,1
Yağ İkazı	-	-	-	-	-	-	-
Boyutlar (U x G x Y) (mm)	485 x 365 x 420	510 x 385 x 455	330 x 250 x 325	430 x 360 x 400	435 x 375 x 400	660 x 495 x 515	735 x 535 x 565
Boş Ağırlık (kg)	21	26	6,8	22	23,5	61	78

Long lasting and
high performance engines



**ANADOLU
MOTOR**

Always by your side

ANADOLU MOTOR
ÜRETİM VE PAZARLAMA A.Ş.
Şekerpınar Mah. Albayrak Sok.
No: 4 Çayirova 41420 Kocaeli, Turkey
Phone: (+90 262) 999 23 00
Fax : (+90 262) 658 18 26
export@anadolumotor.com
www.anadolumotor.com



WATER PUMPS




MODEL		AD 320	AD 510 BS	6 LD 400
Cylinders	(Number)	1	1	1
Displacement	(cm) ³	315	510	395
Bore	(mm)	78	85	86
Stroke	(mm)	66	90	68
Compression Ratio		17.5:1	17.5:1	18:1
Rotation	(rpm)	3,600	3,000	3,600
Rating N (DIN 70020)	(HP)	6.5	12	8.5
Max. Torque	(kgm)	13.8@2,800 (N power)	32.8@1,800	2@2,200 rpm
Fuel Tank Capacity	(l)	5	5.3	4.5
Specific Fuel Consumption	(gr/HPh)	220	190	220
Oil Consumption	(gr/h)	5	8	11.5
Oil Sump Capacity	(l)	0.30	1.75	1.2
Dry Weight	(kg)	33	65	45


MODEL		3 LD 510	4 LD 640	4 LD 820
Cylinders	(Number)	1	1	1
Displacement	(cm) ³	510	638	817
Bore	(mm)	85	95	102
Stroke	(mm)	90	90	100
Compression Ratio		17.5:1	17:1	17:1
Rotation	(rpm)	3,000	3,000	2,600 (3,000)
Rating N (DIN 70020)	(HP)	12	13	15 / (17)
Max. Torque	(kgm)	3.35@1,800 rpm	3.5@1,800 rpm	5@1,600 rpm
Fuel Tank Capacity	(l)	5.5	7.5	7.2
Specific Fuel Consumption	(gr/HPh)	190	190	190
Oil Consumption	(gr/h)	10	24	30
Oil Sump Capacity	(l)	1.75	2.6	2.6
Dry Weight	(kg)	60	98	100

MODEL			3 LD 510 LK-4	3 LD 510 LY-3	4 LD 640 LY-3	4 LD 820 LY-3	4 LD 820 LS-4
Engine			Antor 3LD 510 12 HP Diesel	Antor 3LD 510 12 HP Diesel	Antor 4LD 640 13 HP Diesel	Antor 4LD 820 17 HP Diesel	Antor 4LD 820 17 HP Diesel
Pump Type			Top Flapped Suction Sided, Centrifuge	Scroll Case, Centrifuge	Scroll Case, Centrifuge	Scroll Case, Centrifuge	Scroll Case, Centrifuge
Engine Rotation		(rpm)	3,000	3,000	3,000	2,600	2,600
Pump Inlet Diameter		(inch)	4"	4"	4"	4"	5"
Pump Outlet Diameter		(inch)	4"	3"	4"	4"	4"
Efficient Operating Range	Flow	ton/hour	10 - 85	20 - 55	20 - 60	20 - 80	20 - 175
	Head	(m)	32 - 10	65 - 25	75 - 25	65 - 25	40 - 5
Fuel Tank		(l)	5,3	5.3	7.2	7.2	7.2
Accouplement Type			Monoblock, Single Bearing	Single Bearing, Direct Monoblock, Coupled	Single Bearing, Direct Monoblock, Direct	Direct Direct, Monoblock	Monoblock, Single Bearing
Packing Gland Type		(inch)	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
Water Pump Weight		(kg)	140	125	160	165	175
Dimensions		(mm)	585 x 456 x 424	585 x 456 x 424	655 x 494 x 429	655 x 485 x 480	655 x 485 x 480

ANTOR DIESEL
AD 510 BS

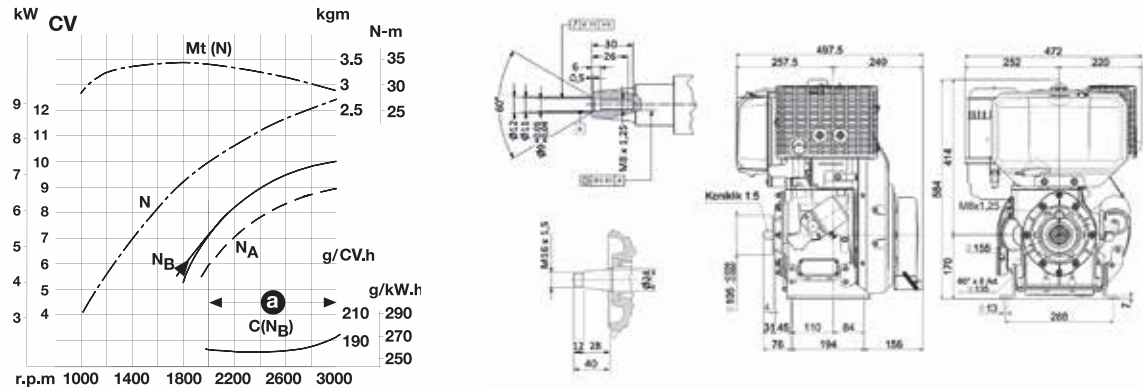

ANTOR DIESEL
4 LD 820

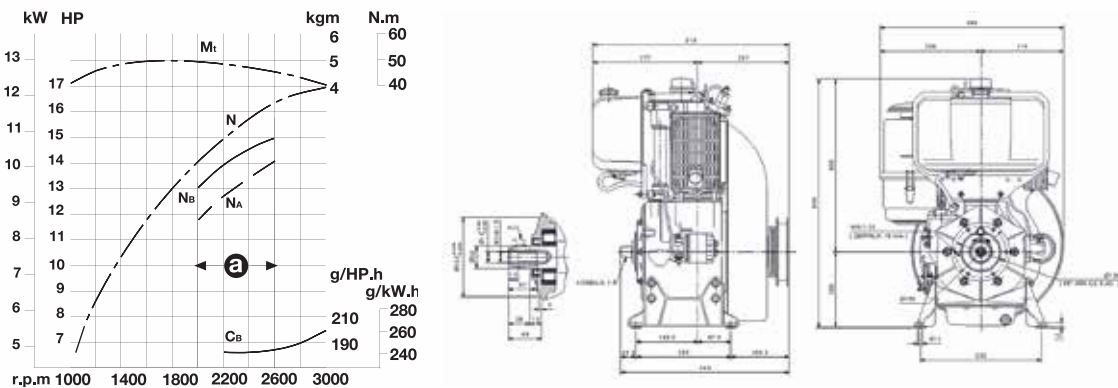

High performance and light weight; Four stroke air cooled; Direct injection on piston; Oil-bath air-cleaner or oil bath and cyclonic precleaner air-cleaner; Changeable oil filter element and fuel filter element; Gear pump forced feed; Extra fuel starting device; Automatic centrifugal governor; Hand or remote speed control; Rope, automatic recoil or electric starter; Re-borable cylinder. Conical power take off counterclockwise rotation on crankshaft. (PTOSIDE)

Please contact us for alternative versions.