

Anexa 21 Saltea antiescare grad II și III cu celule cilindrice, Model 28575, Gima**Nr. de inregistrare AMDM: DM000148046**

Specificarea tehnică deplină solicitată, Standarde de referință	Specificarea tehnică deplină oferita, Standarde de referință
<p>Saltea antiescare gradul II și III, cu celule cilindrice</p> <p>Descriere: Salteaua antiescare previne aparitia escarelor, daca pacientul are deja escare salteaua antiescare va ajuta la vindecarea acestuia impreuna cu tratamentul medicamentos si dieta de viata prescrisa de medic Parametrul, Specificația</p> <p>Saltea Dimensiuni aproximative: 195x90 (±5cm), înălțime minim 11cm Celule cilindrice gonflabile (formă tubulară): minim 16 Material impermeabil, rezistent la curățare și dezinfecție, da Celule cilindrice conectate în două grupe A și B da Greutatea maximă suportată minim 140 Kg</p> <p>Caracteristici compresor Compresor cu presiune alternanta, da Ciclul de umflare / dezumflare 10-15 minute Cârlige pentru fixare de marginea patului, da Nivel de zgomot redus, da Debitul de aer 4-9 litri/min Presiunea reglabila la ieșire, minim 50-100 mmHg Alimentare rețea electrică 220 V, 50 Hz da Termenul de garanție minim 2 ani echivalent la 24 luni Dovada înregistrării dispozitivului ofertat în Registrul de Stat al Dispozitivelor Medicale - Vor fi atribuite doar Dispozitivelor Medicale înregistrate în Registrul de Stat al Dispozitivelor Medicale.</p>	<p>Saltea antiescare gradul II și III, cu celule cilindrice</p> <p>Descriere: Salteaua antiescare previne aparitia escarelor, daca pacientul are deja escare salteaua antiescare va ajuta la vindecarea acestuia impreuna cu tratamentul medicamentos si dieta de viata prescrisa de medic - brosură Parametrul, Specificația</p> <p>Saltea Dimensiuni aproximative: 198x86 (±5cm), înălțime 12.8cm- brosură Celule cilindrice gonflabile (formă tubulară): 17+1 de rezerva, - brosură Material impermeabil, rezistent la curățare și dezinfecție, da- brosură Celule cilindrice conectate în două grupe A și B da, brosură Greutatea maximă suportată: 150 Kg, brosură</p> <p>Caracteristici compresor Compresor cu presiune alternanta, da, brosură Ciclul de umflare / dezumflare: 12 minute, brosură Cârlige pentru fixare de marginea patului, da Nivel de zgomot redus, da Debitul de aer: 7-8 litri/min, brosură Presiunea reglabila la ieșire, minim 55-120 mmHg, brosură Alimentare rețea electrică 220-240 V, 50 Hz, brosură Termenul de garanție minim 2 ani echivalent la 24 luni Dovada înregistrării dispozitivului ofertat în Registrul de Stat al Dispozitivelor Medicale , Nr de inregistrare AMDM: DM000148046</p>

KIT 5010E ALTERNATING PRESSURE MATTRESS + PUMP



Product Code	28575
Unit of sale	1 kit
Minimum order	1
Type	Medical device
Class	I

UK-REP	No
CH-REP	No

RDM (NSIS)	2472448
CND	V080701
EAN/UPC	8023279285758
PARAF	975386057

Description

KIT 5010E ALTERNATING PRESSURE MATTRESS + PUMP

MODERATE TO INTENSIVE CARE STAGE I, II, III

Valuable overlay system designed for prevention and treatment of patients at moderate to intensive risk of pressure ulcers. Pressure is periodically redistributed by inflating and deflating cells in order to mimic natural sleep movement patterns and avoid long term pressurization of tissue.

Manual in: GB, FR, IT, ES, PT, DE, PL, RO, SE, GR.

Ventilated low-air-loss cells wicks moisture away

Professional use

Nylon PU cover with button biocompatibility, vapor permeable & water resistant. Flame Retardant.

ALTERNATING FUNCTION

The pump inflates and deflates the cells with cyclicity, to change the contact position between the patient and the bed, to promote the blood circulation, to prevent and recover the bedsore, reducing the patient's pain and the nursing labor.

Technical Specifications


PUMP:

Size: 30x13.5x11 cm
Cycle time: 12 min
Operating voltage: 220-240 V, 50 Hz
Working pressure: 55-120 mmHg
Case material: Flame retardant ABS
Air output: 7-8 liter/min
TUV-CE IEC/EN60601-1; 60601-1-2

MATTRESS:

Total size: 198x86x12.8 cm
Alternating 1 in 2 (group A and B)
Cell height: 12.8 cm (5")
Cover material: Nylon PU with button
Thickness: 0.4 mm
Number of cells: 17+1 spare
Cells material: nylon PVC
Load: 150 kg

ANTI-DECUBITUS AIR MATTRESSES WITH PUMP - STAGE I AND II

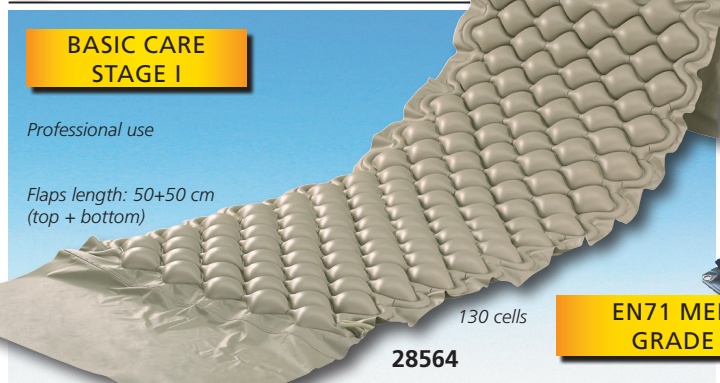

BASIC CARE STAGE I
Professional use
Flaps length: 50x50 cm (top + bottom)
130 cells
EN71 MEDICAL GRADE PVC
28564

ALTERNATING BUBBLE MATTRESS
Designed for the treatment and prevention of pressure sore stage I in short-term and domiciliary therapies. The PVC mattress is composed of 130 7 cm-high bubble cells, particularly comfortable. Fixable to bed by extra flaps on both top and bottom side. Cold-resistant -30 degrees.

PUMP SYSTEM
Special silent pump for an excellent pressure regulation by a knob on the front panel. It can be hung to any kind of hospital bed frame by means of two adjustable hooks. For use with bubble or alternating cell mattresses. **28565**

MODERATE CARE STAGE I, II
Professional use
Cells (20+1 spare) are fixed by means of pressure stud and can easily be replaced in case of breakage
28567

ALTERNATING INTERCHANGEABLE CELL-MATTRESS
Recommended for the prevention and treatment of pressure sore stage I and II in medium-term and domiciliary therapies. The 20.95 cm-high Nylon+PVC cells provide superior comfort.

GIMA code	MATTRESSES AND PUMP
28564	Bubble mattress
28565	Pump for 28564
28566	Kit bubble mattress+pump (28564+28565)
28567	Interchangeable cell mattress
28568	Pump for 28567
28569	Kit cell mattress+pump (28567+28568)
28570	Spare cell for 28567

Manual and box in 10 languages: GB, FR, IT, ES, DE, PT, PL, HU, GR, Arabic

TECHNICAL SPECIFICATIONS - PUMP

	28565	28568
Size:	25x12x10 cm	
Operating voltage:	110-220 V, 50-60 Hz	
Working pressure:	40-100 mmHg	40-110 mmHg
Air output:	6-7 liter/min	6-7 liter/min
Cycle time:	6 min	12 min
Case:	TUV-CE IEC/EN60601-1; 60601-1-2	

TECHNICAL SPECIFICATIONS - MATTRESS

	28564	28567
Total size:	200x90x7 cm	200x86x9.5 cm
Cell height:	7 cm (2.7")	9.5 cm (4")
Material:	PVC	Nylon+PVC
Thickness:	0.32 mm	0.32 mm
Load:	135 kg	140 kg

THERAPEUTIC ANTI-DECUBITUS MATTRESSES - STAGE III AND IV




MODERATE TO INTENSIVE CARE STAGE I, II, III
Ventilated low-air-loss cells wicks moisture away
Professional use
Nylon PU cover with button biocompatibility, vapor permeable & water resistant with CA117. Flame Retardant Level.
28575

• **28575 KIT 5010E ALTERNATING PRESSURE MATTRESS + PUMP**
Valuable overlay system designed for prevention and treatment of patients at moderate to intensive risk of pressure ulcers. Pressure is periodically redistributed by inflating and deflating cells in order to mimic natural sleep movement patterns and avoid long term pressurization of tissue. Manual in: GB, FR, IT, ES, PT, DE, PL, RO, SE, GR.
• **28576 CELL for 28575 - spare**

INTENSIVE CARE STAGE I, II, III, IV
Cotton lining with zipper
Professional use
CPR straps quickly deflate the mattress for emergencies
Low pressure alarm
Air pressure dial adjustment
28580-2

• **28580 KIT 8010 ALTERNATING PRESSURE MATTRESS + PUMP**
• **28582 KIT 8080 ALTERNATING PRESSURE MATTRESS + PUMP**
Advanced systems of alternating pressure mattresses. The multi-mode pump offers:
- **alternating mode:** the pressure is periodically redistributed by inflating and deflating cells in order to mimic natural sleep movement patterns and avoid long term pressurization of tissue.
- **constant static mode:** the pressure is about 2/3 lowered when compared to the same pressure level from alternating mode by means of immersion and envelopment. Visual alarms notify the caregiver of unusual situation, reducing the risk of human error. Suitable for the prevention and treatment of all stages of pressure ulcers. Manual in: GB, FR, IT, ES, PT, DE, PL, RO, SE, GR.
• **28581 CELL for 28580 - spare** • **28583 CELL for 28582 - spare**

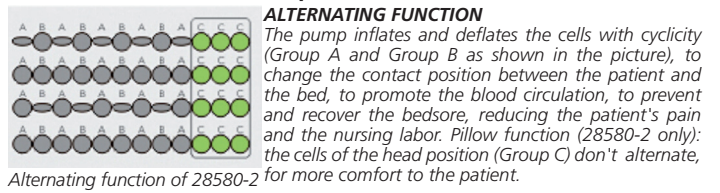

TECHNICAL SPECIFICATIONS - PUMPS (28575, 28580, 28582)

Size:	30x13.5x11 cm	Cycle time:	12 min
Operating voltage:	220-240 V, 50 Hz	Working pressure:	55-120 mmHg
Case material:	Flame retardant ABS	Air output:	7-8 liter/min
	TUV-CE IEC/EN60601-1; 60601-1-2		

PUMP 28580, 28582 only
Quick connector with transfer cap to transform mattress into a sealed static surface to facilitate patient transportation.

Quick connector

TECHNICAL SPECIFICATIONS - MATTRESS

	28575	28580	28582
Total size:	198x86x12.8 cm	200x86x21 cm	
Alternating	1 in 2 (group A and B)		
Cell height:	12.8 cm (5")	20 cm (8")	
Cover material:	Nylon PU with button	Nylon+PU with cotton lining	
Thickness:	0.4 mm	0.4 mm	0.25 mm
Number of cells:	17+1 spare	20+1 spare	
Cells material:	nylon PVC	nylon PVC	nylon TPU
Load:	150 kg	160 kg	200 kg