

RTECH-PHOTOMETRY LABORATORY

Testreport : Measurement of luminous intensity distribution related to the standard
NBN-EN 13032-1; NBN-EN 13032-4; CIE 121-1996; CIE S 025/E; IES LM-79-08 and procedures PT-P-01
and PT-P-02
rue de Mons, 3 B-4000 LIEGE - Tel : 04/224.71.40 - Fax : 04/224.25.90
Measurement for Schröder group.

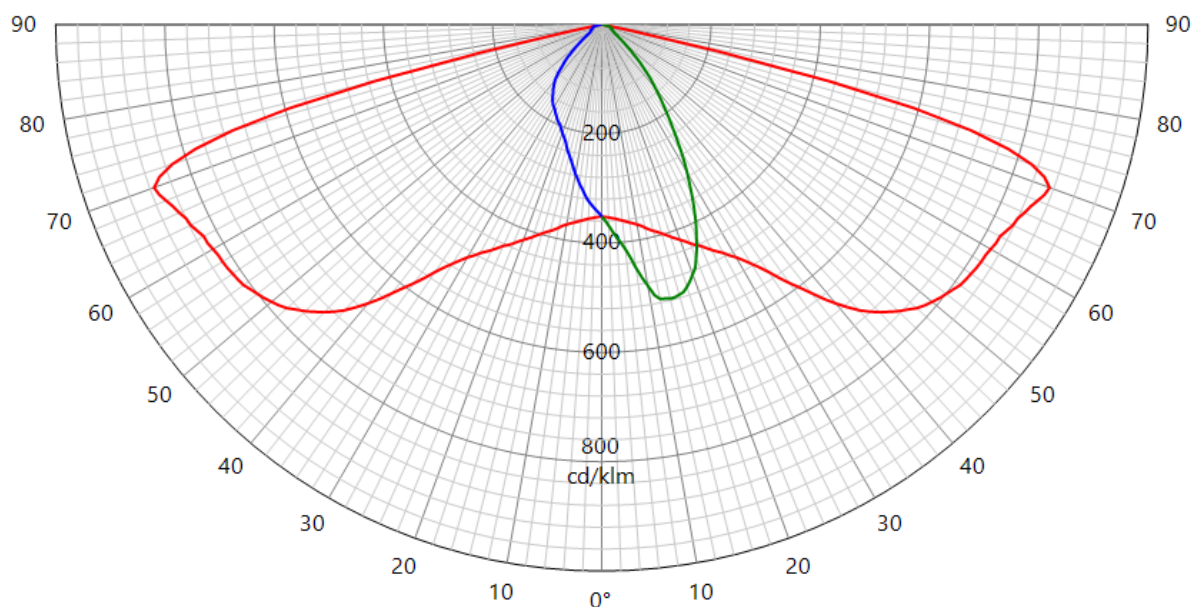
LED

Origin TUNGSRAM-Schröder Zrt. Hungary	Production TUNGSRAM-Schröder Zrt. Hungary	Luminaire VOLTANA 0	Inclination 0°	Request # FD39022
Type LED	BIN 40-70M-4-TB-RB	Source Trademark Samsung	Reference LH351C	# LEDs 6
Reflector 5205	Master -	Reflector DKI Led assembly Road lighting Injected 0.0°	No 5205	
Protector integrated lenses	Lens DKI 5205 PC	Laboratory observation VOLTANA 0 with 6 Samsung LH 351C Used flux for efficiency matrix calculation = 1157lm - CCT = 3859K - CRI = 72,26 (see sphere test report 2019/52 on appendix).		
Purpose DOC	Sample date 08-01-2019	Sample # 39R004		
Observation DOC Voltana 0 with lenses 5205 Flux coefficient multiplicator (only for efficiency matrix): From 350 to 500 mA : 1,379 From 350 to 700 mA : 1,846 From 350 to 1000mA: 2,450				
Notes The publication of this report in another form than the original one is not allowed without agreement of the laboratory. This report concerns type tests on one or a series of specimens.				

Asked by RCA	Measured by CLD	Approved by RLABO	Appendix 1	  226-TEST NBN EN ISO/IEC 17025 : 2005	42571
------------------------	---------------------------	-----------------------------	----------------------	---	--------------

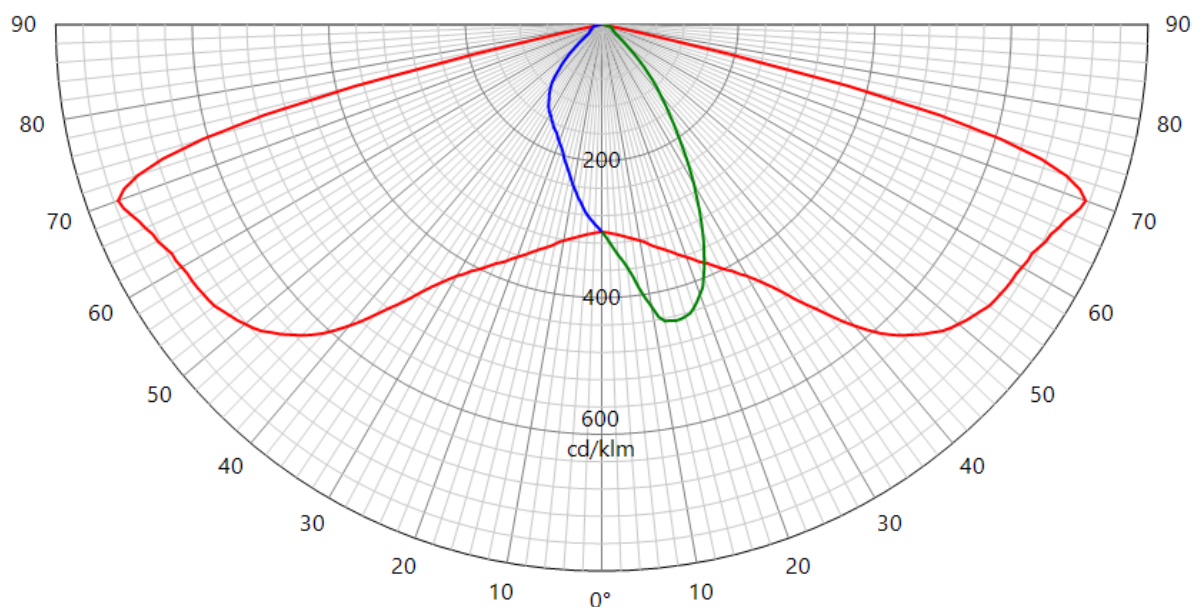
LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022		
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5205	
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5205
Matrices	425711	Φ 0-90° = 1036lm - 90-180° = 0lm							Absolute measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5205 PC								
Observation		Matrix in total flux @350 mA								
		Light losses due to thermal stabilisation : 1%								
		Electrical measurement on LED (#1) : Voltage = 16.83 V Current = 0.350 A Power = 5.88 W Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.037 A Power = 7.98 W PF = 0.936 Total luminaire power = 7.98 W : Lm/Watt = 129.80 lm/W								
		Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A								
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t° 24.9°		Measurement date 07-02-2019			
5 - 175	872	70	S							
90	517	14	D							
270	351	0	G							

**42571**

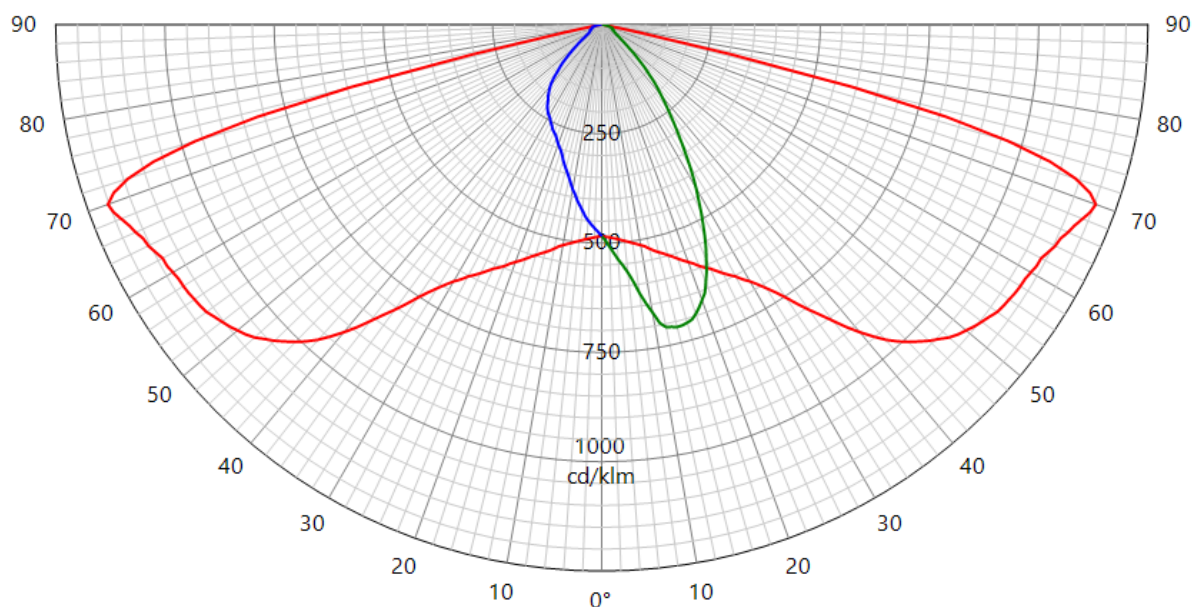
LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022		
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5205	
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5205
Matrices	425712	η 0-90° = 89.5% - 90-180° = 0.0%							Relative measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5205 PC								
Observation		Matrix in efficiency @350 mA								
		Light losses due to thermal stabilisation : 1%								
		Electrical measurement on LED (#1) : Voltage = 16.83 V Current = 0.350 A Power = 5.88 W								
		Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.037 A Power = 7.98 W PF = 0.936								
		Total luminaire power = 7.98 W								
Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A										
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°		Measurement date			
5 - 175	754	70	S							
90	447	14	D							
270	303	0	G							

**42571**

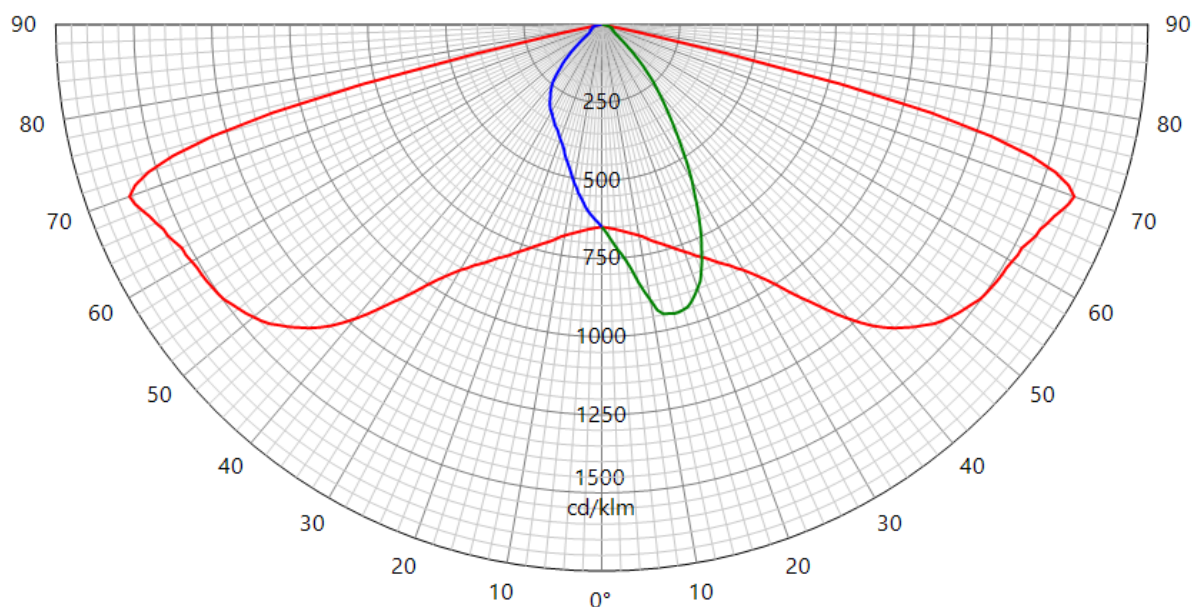
LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022			
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5205		
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5205	
Matrices	425713 Φ 0-90° = 1428lm - 90-180° = 0lm										Absolute measurement
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5205 PC									
Observation		Matrix in total flux @500 mA									
		Light losses due to thermal stabilisation : 1.7%									
		Electrical measurement on LED (#1) : Voltage = 17.15 V Current = 0.500 A Power = 8.58 W Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.050 A Power = 10.97 W PF = 0.962									
		Total luminaire power = 10.97 W : Lm/Watt = 130.21 lm/W									
Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A											
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t° 24.9°		Measurement date 11-02-2019				
5 - 175	1203	70	S								
90	713	14	D								
270	484	0	G								


42571

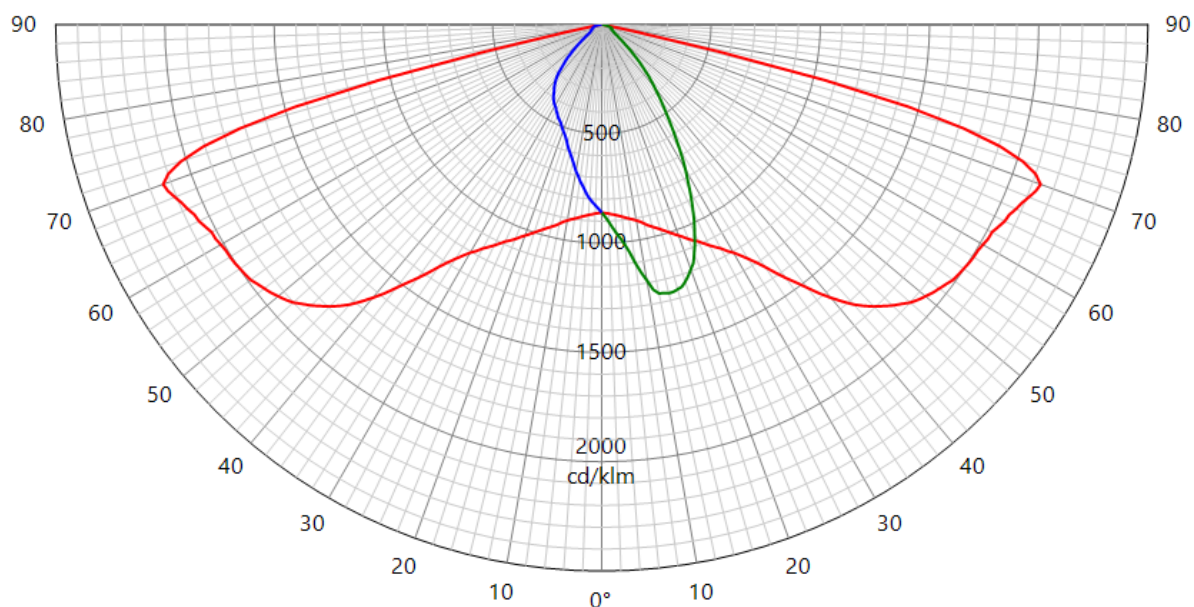
LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022		
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5205	
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5205
Matrices	425714	Φ 0-90° = 1912lm - 90-180° = 0lm							Absolute measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5205 PC								
Observation		Matrix in total flux @700 mA								
		Light losses due to thermal stabilisation : 2,6 %								
		Electrical measurement on LED (#1) :			Voltage = 17.51 V		Current = 0.700 A		Power = 12.27 W	
		Electrical measurement on driver (#1) :			Voltage = 230.00 V		Current = 0.067 A		Power = 15.15 W PF = 0.977	
		Total luminaire power = 15.15 W : Lm/Watt = 126.21 lm/W								
Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A										
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t°		Measurement date			
5 - 175	1610	70	S							
90	954	14	D							
270	648	0	G							

**42571**

LUMINOUS INTENSITY DIAGRAM

Origin TUNGSRAM-Schröder Zrt. Hungary		Production TUNGSRAM-Schröder Zrt. Hungary		Luminaire VOLTANA 0		Inclination 0°		Request # FD39022				
Source	Type LED	BIN 40-70M-4-TB-RB		Trademark Samsung		Reference LH351C		# LEDs 6	Reflector 5205			
Reflector	DKI Led assembly Road lighting Injected 0.0°								No	5205		
Matrices	425715 Φ 0-90° = 2538lm - 90-180° = 0lm										Absolute measurement	
Protector Refractor Lens		Protector integrated lenses Lens 6 x DKI 5205 PC										
Observation		Matrix in total flux @1000 mA										
		Light losses due to thermal stabilisation : 3,7 %										
		Electrical measurement on LED (#1) : Voltage = 17.96 V Current = 1.000 A Power = 17.96 W Electrical measurement on driver (#1) : Voltage = 230.00 V Current = 0.096 A Power = 21.80 W PF = 0.987 Total luminaire power = 21.80 W : Lm/Watt = 116.41 lm/W										
		Driver #1 : Philips Xitanium FP 22W 0.3-1.0A SNLDAE 230V S175 sXt S175 sxt PCB 00-71-626 A										
Plane	I Peak	Peak position	Index	I zero	Laboratory ambient t° 24.9°		Measurement date 11-02-2019					
5 - 175	2137	70	S									
90	1267	14	D									
270	860	0	G									

**42571**

CONFORMITY STATEMENT

Measurement fulfil Standards:

NBN-EN 13032-1
NBN-EN 13032-4
NBN-EN 17025:2005
CIE 121-1996
LM79-08
CIE S 025

Measurement quantities measured:

Light distribution in relative or absolute photometry
Led alone cold lumen package
Led CCT and CRI
Power consumption of the fitting
Lm/watt

Electrical measurement, if not specified:

Primary values are AC with 50Hz frequency
Secondary values on SSL are DC

CCT, CRI and chromaticity coordinates: are measured in Ulbricht sphere.
If specified Main test report refer to sphere extra test report.

Light distribution are measured on gonio. If not otherwise specified, measurement is done at 50 Hz

Number of hours operated prior to measurement: if not otherwise specified, 0 hours (no aging).

Stabilization time: If not otherwise specified, a minimal stabilization time of 0.5 hour is applied; and measurement will start when it exists no more variation above 0.5% in 15 minutes

Total operating time of the product including stabilization:
45 minutes have to be added by measurement.
Minimal operating time is 75 minutes

Luminous intensity distribution: available on electronic file with
.mat format (internal Schröder format)
.ldt format (European standard)
.IES format (American standard)

Statement of uncertainties (K=2, 95% of confidence level):
Uncertainties calculated based on a typical Schröder fitting and PCBA

Intensity measurement: +/- 3%

Angle: +/- 0.5°

Flux: +/- 2.5%

Electrical DC

Power: +/- 0.25%

Voltage: +/- 0.15%

Current: +/- 0.15%

Electrical AC

Power: +/- 0.15%

Voltage: +/- 0.3%

Current: +/- 0.3%

Temperature: +/- 0.65%

ISP2000	JETI	
CCT:	+/- 5%	+/-7.5%
CRI:	+/- 2%	+/-2.75%
x/y:	+/- 2%	+/-4.6%

lm/Watt: +/-3.5%

Measuring instruments in use:

Gonio 1

Type C with Moving mirror

Manufacturer: LMT Lichtmesstechnik GmbH Berlin, Helmholtzstrasse 9 10587 Berlin, Germany

Type: GO-DS 2000

Calibration: traceable to PTB (Physikalisch-Technische Bundesanstalt D-Braunschweig) and METAS (Federal Institute of Metrology, CH-Bern)

Photometric test distance: By default 10 meter, on request 30 meter.

Gonio 2

Type C

Manufacturer: Technoteam Bildverarbeitung, Werner-von-Siemens-Strasse 5 98693 Ilmenau, Germany

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Photometric test distance: Near Field

Sphere n°1

4p geometry

Manufacturer: LMT Lichtmesstechnik GmbH, Helmholtzstrasse 9 10587 Berlin, Germany

Type: UL2000 + U1000 V-Lambda photometer

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Sphere n°2

4p geometry

Manufacturer: Instrument Systems GmbH, Neumarkter Str. 83, 81673 Muenchen, Germany

Type ISP2000 + Spectroradiometer CAS120 and CAS140

Calibration: traceable to NIST

Colorimetric portable spectroradiometer

Manufacturer: JETI Technische Instrumente GmbH, Tatzendpromenade 2 07745 Jena

Type: SPECBOS 1201

Calibration: traceable to NIST

Multimeters

Manufacturer: Agilent

Type: 34401A

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Wattmeters

Manufacturer: Yokogawa

Type: WT210 and WT310

Calibration: traceable to BIPM (Bureau International des Poids et Mesures F-Sèvres)

Thermometers

Amarell Precision

Type: Liquid in glass N63833

Calibration: traceable to LBT (Laboratoire Belge de Thermométrie)