



## TIP LOAD SCALE

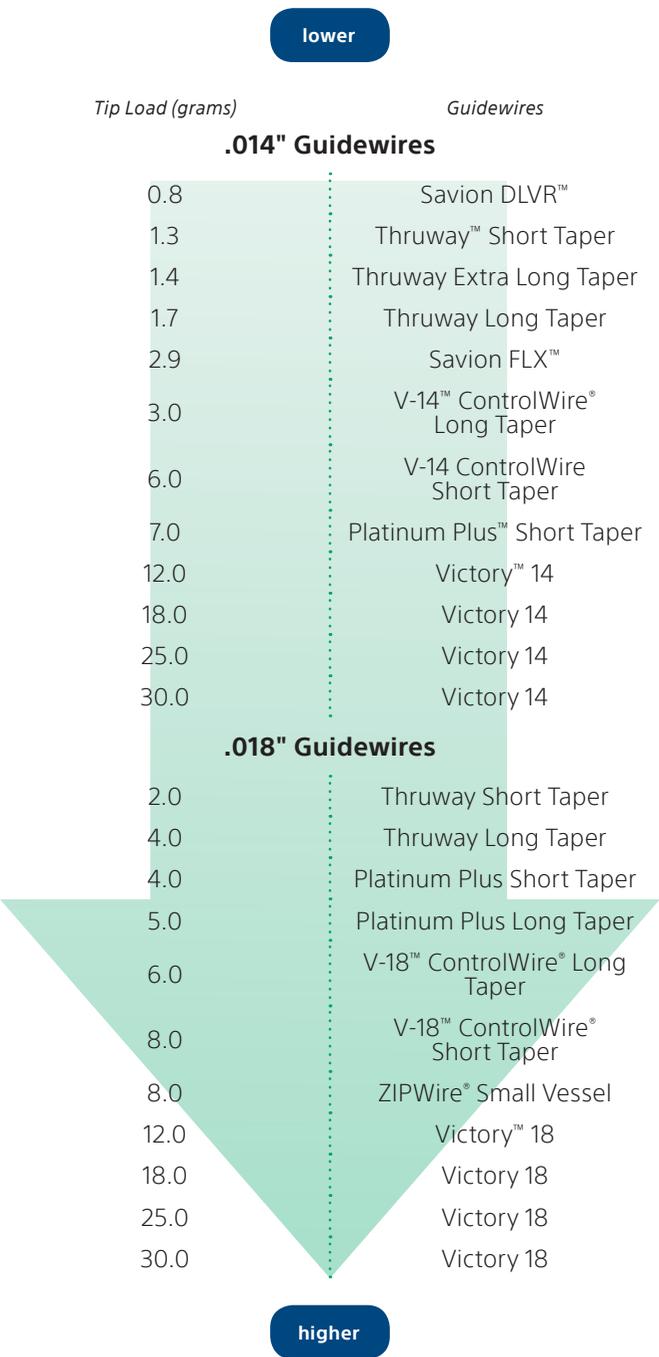

## RAIL SUPPORT SCALE

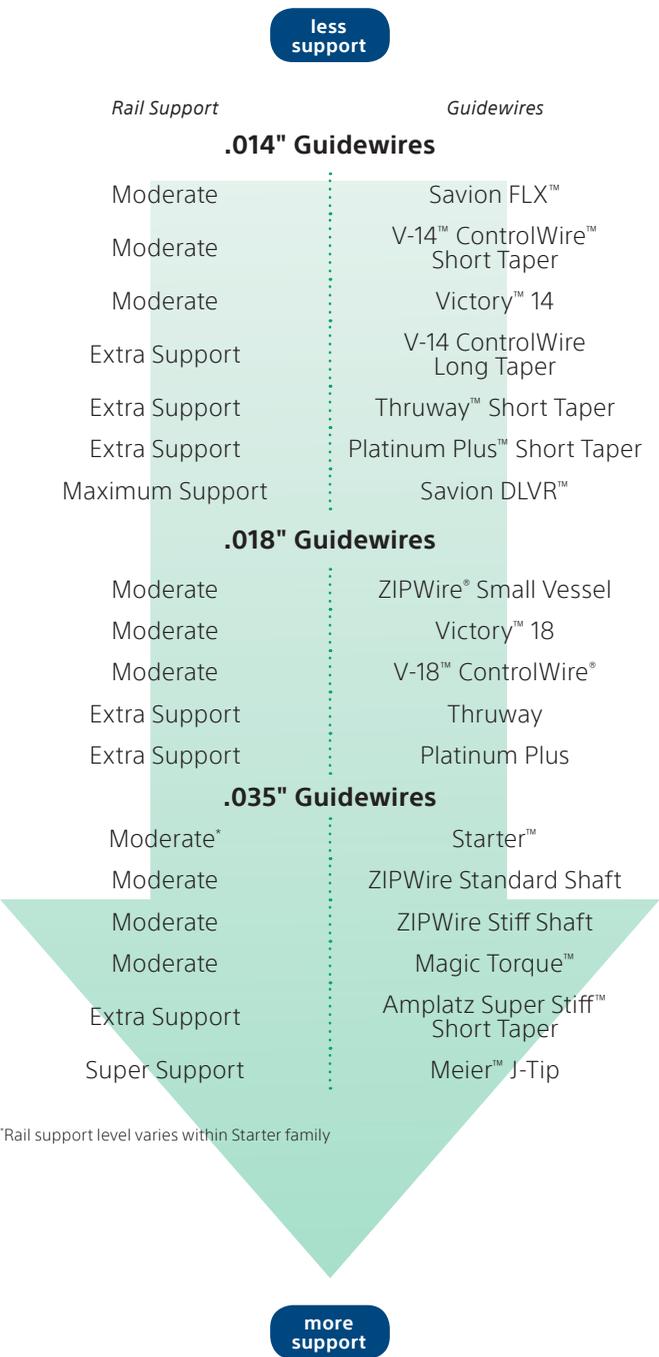

**THE GUIDEWIRE YOU USE MATTERS.  
OUR PORTFOLIO PROVIDES AN  
OPTION FOR EVERY STEP IN THE CASE.**

All images owned by Boston Scientific.  
All trademarks are the property of their respective owners.  
CAUTION: The law restricts these devices to sale by or on the order of a physician. Indications, contraindications, warnings and instructions for use can be found in the product labelling supplied with each device. Information for use only in countries with applicable health authority registrations. This material not intended for use in France. Products shown for INFORMATION purposes only and may not be approved or for sale in certain countries. Please check availability with your local sales representative or customer service.  
PI-585802-AA Printed in Germany by medicalvision.

<b>.014" GUIDEWIRES</b>		Tip Style	Radiopaque Length (cm)	Tip Load (grams)	Tip Shape	Core Material	Rail Support	Distal Coating	Lengths
	Savion FLX™	Polymer Sleeve	2	2.9	Angled, Straight	Nitinol	Moderate Support	Hydrophilic	185, 300
	Thruway™ Short Taper	Spring Coil	3	1.3	J-Tip, Straight	Stainless Steel	Extra Support	Non-hydrophilic (Silicone)	130, 190, 300
	Thruway Extra Long Taper	Spring Coil	5	1.4	Straight	Stainless Steel	Extra Support	Non-hydrophilic (Silicone)	130, 190, 300
	Thruway Long Taper	Spring Coil	3	1.7	J-Tip, Straight	Stainless Steel	Extra Support	Non-hydrophilic (Silicone)	130, 190, 300
	V-14™ ControlWire® Long Taper	Polymer Sleeve	2	3.0	Angled, Straight*	Stainless Steel	Extra Support	Hydrophilic / distal 10 cm	182, 300
	V-14 ControlWire Short Taper	Polymer Sleeve	2	6.0	Angled, Straight*	Stainless Steel	Moderate Support	Hydrophilic / distal 38 cm	182, 300
Crossing	Victory™ 14	Polymer Sleeve	2	12.0	Straight*	Stainless Steel	Moderate Support	Hydrophilic / distal 35 cm	195, 300
	Victory 14	Polymer Sleeve	2	18.0	Straight*	Stainless Steel	Moderate Support	Hydrophilic / distal 35 cm	195, 300
	Victory 14	Polymer Sleeve	2	25.0	Straight*	Stainless Steel	Moderate Support	Hydrophilic / distal 35 cm	195, 300
	Victory 14	Polymer Sleeve	2	30.0	Straight*	Stainless Steel	Moderate Support	Hydrophilic / distal 35 cm	195, 300
Delivery Support	Platinum Plus™ Short Taper	Spring Coil	5	7.0	Straight	Stainless Steel	Extra Support	Hydrophilic / distal 11 cm	180, 300
	Savion DLVR™	Spring Coil	3	0.8	Angled, Straight	Stainless Steel	Maximum Support	Distal 3 cm Uncoated / Hydrophilic	185, 300

\* Shapeable

<b>.018" GUIDEWIRES</b>		Tip Style	Radiopaque Length (cm)	Tip Load (grams)	Tip Shape	Core Material	Rail Support	Distal Coating	Lengths
Frontline	Thruway™ Short Taper	Spring Coil	3	2	J-Tip, Straight	Stainless Steel	Extra Support	Non-hydrophilic (Silicone)	130, 190, 300
	Thruway Long Taper	Spring Coil	3	4	J-Tip, Straight	Stainless Steel	Extra Support	Non-hydrophilic (Silicone)	130, 190, 300
	V-18™ ControlWire® Long Taper	Polymer Sleeve	8	6	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 8 cm	150, 200, 300
	V-18™ ControlWire® Short Taper	Polymer Sleeve	12	8	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 12 cm	110, 150, 200, 300
Crossing	Victory™ 18	Polymer Sleeve	2	12	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 35 cm	195, 300
	Victory 18	Polymer Sleeve	2	18	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 35 cm	195, 300
	Victory 18	Polymer Sleeve	2	25	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 35 cm	195, 300
	Victory 18	Polymer Sleeve	2	30	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 35 cm	195, 300
	ZIPWire™ Small Vessel	Polymer Sleeve	Entire Length	8	Angled, Straight	Nitinol	Moderate	Hydrophilic	150, 180
Delivery Support	Platinum Plus™ Short Taper	Spring Coil	7	4	Straight	Stainless Steel	Extra Support	Both‡	60, 180, 260
	Platinum Plus Long Taper	Spring Coil	15	5	Straight	Stainless Steel	Extra Support	Both‡	145, 180, 260

‡ The Platinum Plus .018" is available with Hydrophilic coating or non-hydrophilic (Silicone) coating

<b>.035" GUIDEWIRES</b>		Tip Style	Radiopaque Length (cm)	Tip Shape	Core Material	Rail Support	Distal Coating	Lengths
Access	Starter™	Spring Coil	N/A	J-Tip, Straight	Stainless Steel	Moderate	None	80, 150, 180, 260
Frontline	Magic Torque™	Spring Coil	50	Straight*	Stainless Steel	Moderate	Hydrophilic / distal 10 cm	180, 260
Crossing	ZIPWire® Standard Shaft	Polymer Sleeve	Entire Length	J-Tip, Angled, Straight	Nitinol	Moderate	Hydrophilic	150, 180, 260
	ZIPWire Stiff Shaft	Polymer Sleeve	Entire Length	Angled, Straight	Nitinol	Moderate	Hydrophilic	80, 150, 180, 260
	ZIPWire Long Taper Standard Shaft	Polymer Sleeve	Entire Length	Angled, Straight	Nitinol	Moderate	Hydrophilic	150
	ZIPWire Long Taper Stiff Shaft	Polymer Sleeve	Entire Length	Angled, Straight	Nitinol	Moderate	Hydrophilic	150, 260
Delivery Support	Amplatz Super Stiff™ (Short Taper)	Spring Coil	1	Straight	Stainless Steel	Extra Support	PTFE, PTFE / Heparin	145, 260
	Amplatz Super Stiff (Long Taper)	Spring Coil	7	Straight	Stainless Steel	Extra Support	PTFE, PTFE / Heparin	75, 145, 180, 260
	Amplatz Super Stiff (J-Tip)†	Spring Coil	3	J-Tip	Stainless Steel	Extra Support	PTFE, PTFE / Heparin	145, 180, 260
	Meier™ (J-Tip)	Spring Coil	16	J-Tip	Stainless Steel	Super	None	185
	Meier (C-tip)	Spring Coil	11	C-Tip	Stainless Steel	Super	None	260, 300

† 7 cm radiopaque tip on Heparin Coated version