





Model: GS105D

5-Port Gigabit Unmanaged Switch

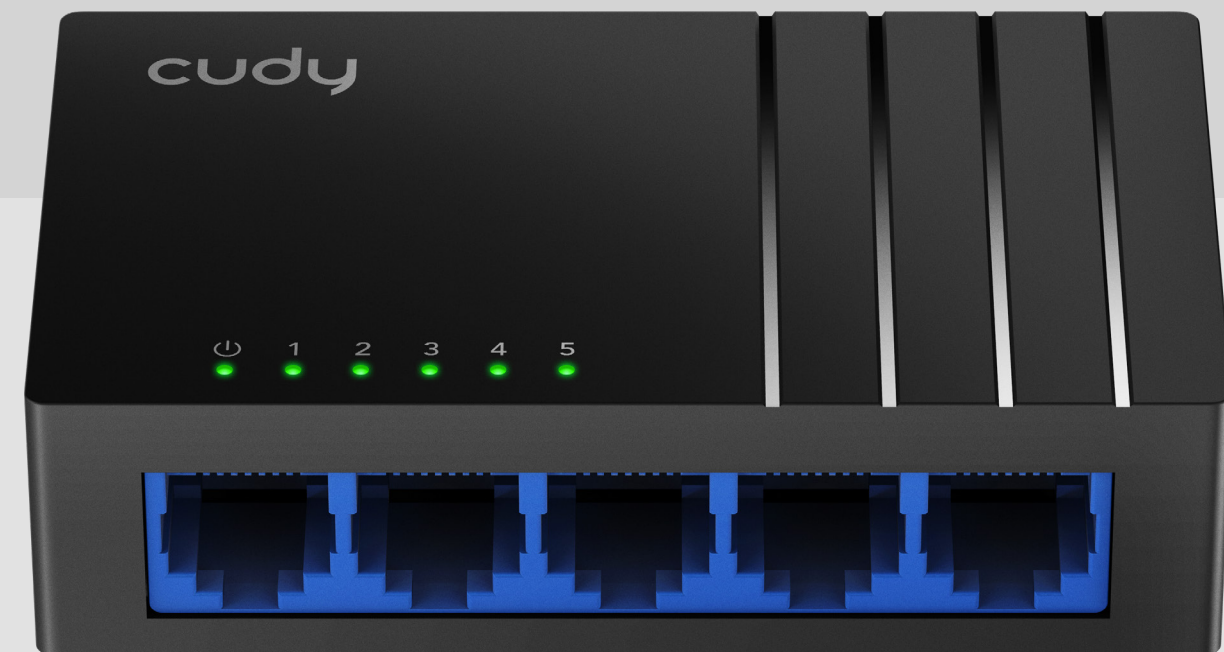

Highlights

A 5-GbE switch with a modern design, supporting full Gigabit speeds on all five ports over distances up to 140 m, and featuring a super-efficient chipset with idle power consumption of just 0.2W.

- 5x Gigabit Ethernet Ports
- Max 140m Gigabit Transmission
- 88x52.5x24 mm(3.46x2.07x0.94")
- Max 1.2W, Idle 0.2W
- IGMP Snooping
- Desktop, Wall-Mount



Package Content

- GS105D
- Power Adapter
- Installation Guide




Longer Gigabit Reach, Lower Power Consumption

— 10/100/1000 Mbps Ethernet

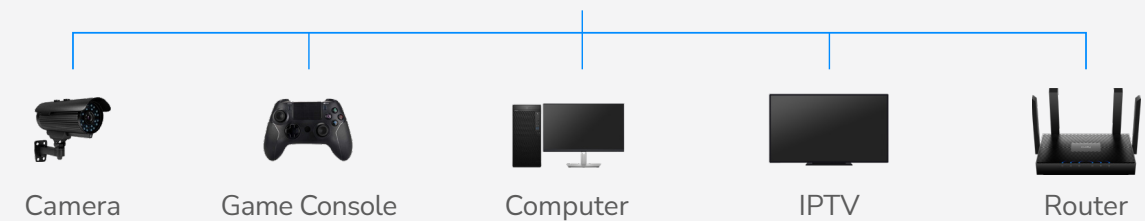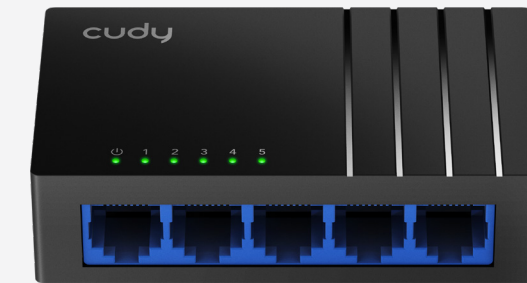

Prolonged Transmission Distance

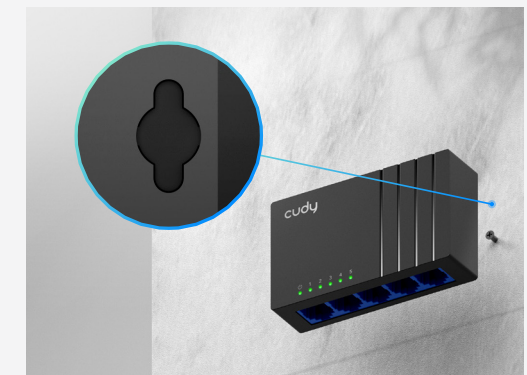

Wall Mounting



Connect Office Computers to Wired Network



Boost Home Devices with Stable Ethernet



Specifications

Interfaces	Gigabit RJ45 Ports	5
	LED	Power
		Speed/Link/ACT of Each Ethernet Port
	Power Input	DC Port
Performance	Copper Speed and Distance	Cat. 3 or higher cable: 100 meters at 10 Mbps Cat. 5 or higher cable: 100 meters at 100 Mbps Cat. 5e or higher cable: 140 meters at Gigabit
	MAC Address Table	2048
	Max Switching Capacity	10 Gbps
	Max Forwarding Rate	7.44 Mpps
	Jumbo Frame	9 KB
	Packet Buffer	1 Mbit
	Power	Power Saving
Power Methods		DC
DC		5V 0.55A
Max Power Consumption		1.2W
Idle Power Consumption		0.2W
Switching	802.3 Protocols	802.3x Flow Control 802.3i 10BASE-T 802.3u 100BASE-TX 802.3ab 1000BASE-T
	L2 Features	IGMP Snooping

Specifications

Reliability	Lightning/Surge Protection	2kV
	ESD Contact Protection	4kV
	ESD Air Protection	8kV
	Environment	Operating Temperature: 0 °C ~ 40 °C (32 °F ~104 °F) Storage Temperature: -40 °C ~ 70 °C (-40 °F ~ 158 °F) Operating Humidity: 10% ~ 90% non-condensing Storage Humidity: 5% ~ 90% non-condensing
Mechanical	Dimension	88×52.5×24 mm 3.46×2.07×0.94 inches
	Product Weight	57.1 g (2.01 oz.)
	Casing Material	Plastic
	Installation	Desktop
		Wall-mount