

Accessories

Unipolar High Frequency Cords



Unipolar High Frequency Cords

KARL STORZ High Frequency
Instrument Surgical Units

	26002 M	Unipolar High Frequency Cord , with 4 mm plug for models KARL STORZ, Erbe type T, older models and Ellman, length 300 cm
	26004 M	Unipolar High Frequency Cord , with 4 mm plug for models Berchtold and Martin, length 300 cm
	26005 M	Unipolar High Frequency Cord , with 5 mm plug for AUTOCON® II 400 SCB system (111, 115, 122, 125), AUTOCON® II 200, AUTOCON® II 80, KARL STORZ AUTOCON® system (50, 200, 350) and Erbe type ICC, length 300 cm
	26006 M	Unipolar High Frequency Cord , with 8 mm plug for models KARL STORZ AUTOCON® II 400 SCB system (112, 116) and Valleylab, length 300 cm

Please note: All high frequency cords of this page are delivered with a length of 300 cm. If a length of 500 cm is requested please add letter **L** to the part number, e. g. 26002 **ML**, 26176 **LVL**.

High Frequency Surgery Units



UH 400 **AUTOCON® III 400 High-End**, with KARL STORZ-SCB control NEO, power supply 220-240 VAC, 50/60 Hz, including mains cord

UH 400U **AUTOCON® III 400 High-End**, with KARL STORZ-SCB control NEO, power supply 100-127 VAC, 50/60 Hz, including mains cord




UH 801 **Bipolar High Frequency Cord**, length 400 cm, for KARL STORZ AUTOCON® III 400 SCB, for use with KARL STORZ bipolar resectoscopes



UF 902 **Two-Pedal Footswitch**, with button for switchover function, for use with HF generators

27050SC

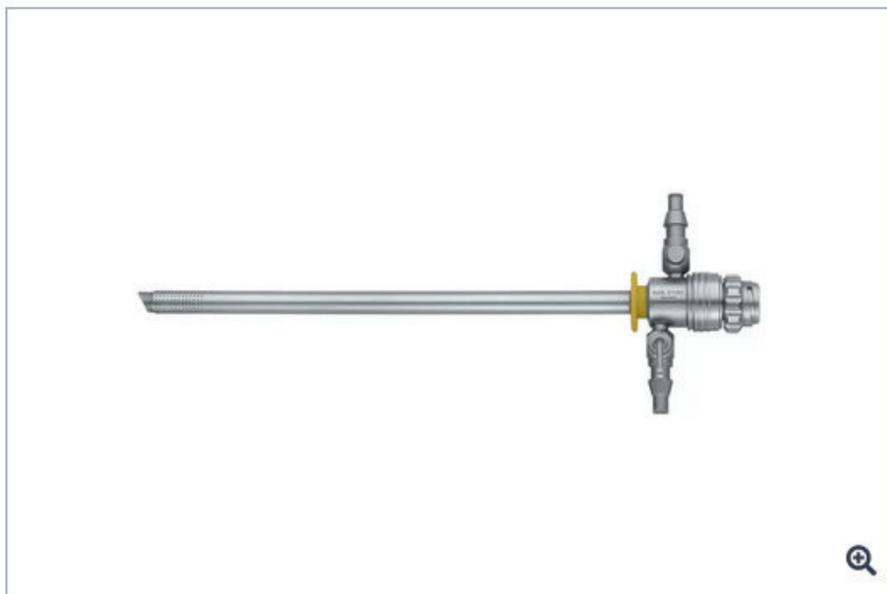

Item no: 27050SC

Resectoscope Sheath, 26 Fr.

Quantity:

Product details

Resectoscope sheath with rotating inner sheath and click mechanism for continuous irrigation and suction

- Sheath can be connected in any position
- Rotating inner sheath
- For better service: Exchangeable inner sheath

Technical details

Documents & Films

Product group / field of application


System size	26 Fr.
Color code	Yellow
Flow property	Continuous flow
LUER-Lock	Rotating
Sheath end	Oblique
Connection mechanism	Click mechanism
Sheath rotation	Rotatable inner sheath
Sterile	No
Type of usage	Reusable

Resectoscope Sheaths with Rotating Inner Sheaths and Click Mechanism

for continuous irrigation and suction

Special Features:

- Sheath can be connected in any position
- Rotating inner sheath
- For better service: Exchangeable inner sheath
- Sheaths can be combined with Working Elements 27040 and 27050

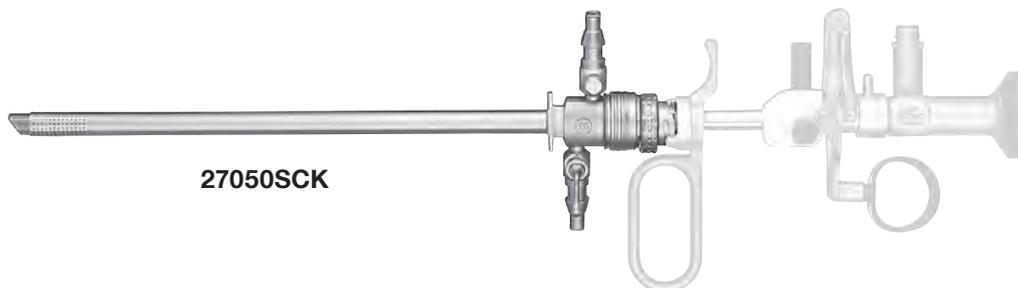

27050SCK

27050SCK

Resectoscope Sheath, including tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, quick-release lock
color code: yellow

27050CA

Inner Sheath, rotating, with ceramic insulation, for use with resectoscope outer sheath of 27050SC

27050SDK

Resectoscope Sheath, including tube for in- and outflow, 28 Fr., oblique beak, rotating inner sheath with ceramic insulation, quick-release lock
color code: black

27050CB

Inner Sheath, rotating, with ceramic insulation, for use with resectoscope outer sheath of 27050SD

The resectoscope sheaths can be used with unipolar and bipolar working elements.

Shaver Blades, reusable, curved

for surgery of the paranasal sinuses and anterior skull base

For use with 40712035 DrillCut-X® II-35 Handpiece



41203KKF




40712035

Shaver Blades, curved 65°, sterilizable

Detailed view	Art. no.	Shaver Blade, with integrated irrigation, length 12 cm
	41203KNF	curved 65°, cutting edge serrated forwards, rectangular cutting window, diameter 4 mm, color code: blue-red
	41203KNB	curved 65°, cutting edge serrated backwards, rectangular cutting window, diameter 4 mm, color code: blue-red
	41203KKF	curved 65°, cutting edge serrated forwards, double serrated, rectangular cutting window, diameter 4 mm, color code: blue-yellow
	41203KKB	curved 65°, cutting edge serrated backwards, double serrated, rectangular cutting window, diameter 4 mm, color code: blue-yellow
	41203KKFA	curved 65°, cutting edge serrated forwards, double serrated, rectangular cutting window, diameter 3 mm, color code: blue-yellow
	41203KKBA	curved 65°, cutting edge serrated backwards, double serrated, rectangular cutting window, diameter 3 mm, color code: blue-yellow
	41203GNF	curved 65°, cutting edge concave forwards, oval cutting window, diameter 4 mm, color code: blue-green
	41203GNB	curved 65°, cutting edge concave backwards, oval cutting window, diameter 4 mm, color code: blue-green

Shaver Blades, straight for paranasal sinus and skull base surgery

For use with all DRILLCUT-X® II and DRILLCUT-X® II-35 handpieces

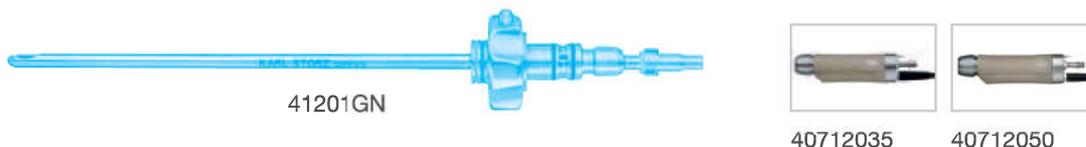

Shaver Blades, straight, sterilizable

Detail	for use with	
	40712035 DRILLCUT-X® II-35 Handpiece 40712050 DRILLCUT-X® II Handpiece	Shaver Blade, with integrated irrigation for DRILLCUT-X® handpiece, length 12 cm
	41201KN	serrated cutting edge, rectangular cutting window, diameter 4 mm, color code: blue-red
	41201KK*	double serrated cutting edge, rectangular cutting window, diameter 4 mm, color code: blue-yellow
	41201GN	concave cutting edge, oval cutting window, diameter 4 mm, color code: blue-green
	41201LN	concave cutting edge, oblique cutting window, diameter 4 mm, color code: blue-black
	41201SN	straight cutting edge, diameter 4 mm, rectangular cutting window, color code: blue-blue
	41201KSA	serrated cutting edge, rectangular cutting window, diameter 3 mm, color code: blue-red
	41201KKSA	double serrated cutting edge, rectangular cutting window, diameter 3 mm, color code: blue-yellow
	41201KKSB	double serrated cutting edge, rectangular cutting window, diameter 2 mm, color code: blue-yellow
	41201LSA	concave cutting edge, oblique cutting window, diameter 3 mm, color code: blue-black

Optional Accessories:



41200RA **Cleaning Adaptor**, LUER-Lock, for cleaning the inner and outer blades of DRILLCUT-X® II/DRILLCUT-X® II-35 accessories

* Can also be used as a navigated shaver blade with 40712055 DRILLCUT-X® II N and 40712535 DRILLCUT-X® II-35 N Handpieces
Components/Spare Parts see ENT catalog

Sinus Burrs, curved

for Nasal Sinuses and Skull Base Surgery

For use with DrillCut-X® II and DrillCut-X® II N



41305 RN





Sinus Burrs, curved 70°/55°/40°/15°, **for single use**, sterile, package of 5

Detail	for use with	Sinus Burr length 12 cm
	40 7120 50 DrillCut-X® II Handpiece 40 7120 55 DrillCut-X® II N Handpiece	
	41304 W	curved 40°, cylindric, drill diameter 3 mm, shaft diameter 4 mm, color code: red-blue
	41303 WN	curved 55°, cylindric, drill diameter 3.6 mm, shaft diameter 4 mm, color code: red-blue
	41305 RN	curved 15°, bud drill, drill diameter 4 mm, shaft diameter 4 mm, color code: red-black
	41305 DN	curved 15°, diamond head, drill diameter 3 mm, shaft diameter 4 mm, color code: red-yellow
	41305 D	curved 15°, diamond head, drill diameter 5 mm, shaft diameter 4 mm, color code: red-yellow
	41305 DW	curved 40°, diamond head, drill diameter 5 mm, shaft diameter 4 mm, color code: red-yellow
	41303 DT	curved 70°, diamond head, drill diameter 3.6 mm, shaft diameter 4 mm, color code: red-yellow

3-13

41335DW

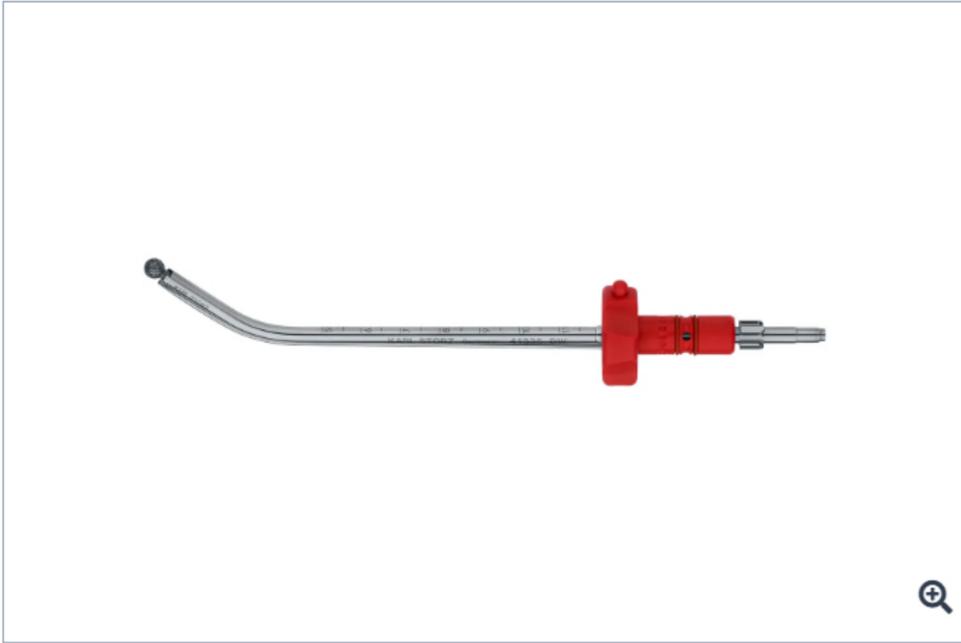

Item no: 41335DW

Sinus Burr 35k, sterile, 5x

Quantity:

Technical details

Documents & Films

Product group / field of application

Sheath Curved

Diameter drill head 5.0 mm

Total length 12 cm

Coarse-grained No

Rotation max. 35000 rpm

Condition of drill head Diamond



Shape drill head Round

Packaging unit 5 pc.

Sterile Yes

STERILE

41335DT

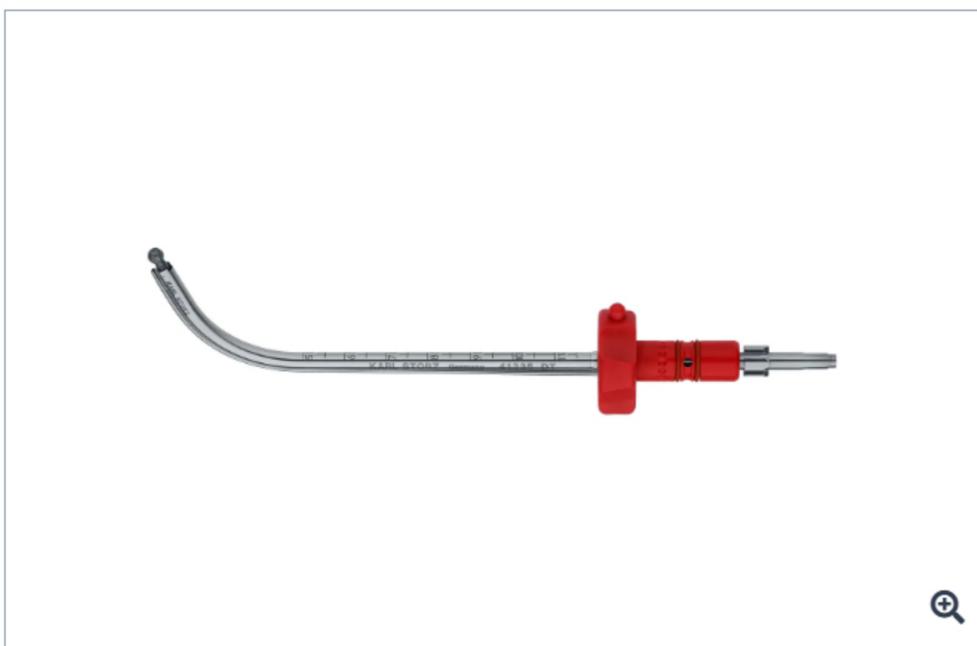

Item no: 41335DT

Sinus Burr 35k, sterile, 5x

Quantity:

Technical details



Documents & Films

Product group / field of application

Sheath	Curved
Diameter drill head	3.6 mm
Total length	12 cm
Coarse-grained	No
Rotation max.	35000 rpm
Condition of drill head	Diamond
Shape drill head	Round
Packaging unit	5 pc.
Sterile	Yes



41335DS

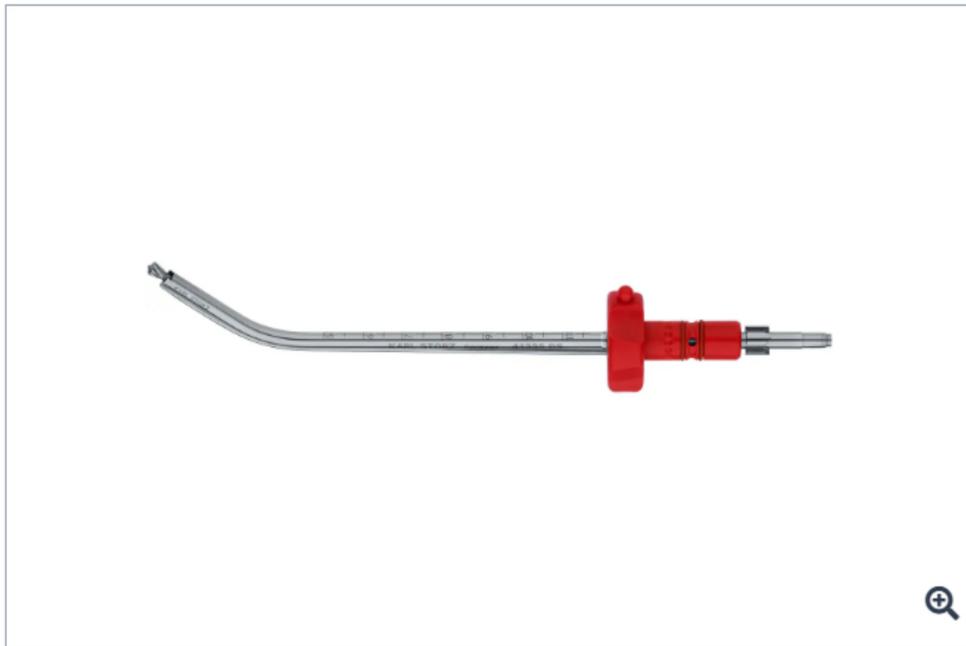

Item no: 41335DS

Sinus Burr 35k, sterile, 5x

Quantity:

– 1 +

On the offer list

Technical details

Documents & Films



Product group / field of application

Sheath	Curved
Diameter drill head	4.0 mm
Total length	12 cm
Coarse-grained	No
Rotation max.	35000 rpm
Condition of drill head	Diamond
Shape drill head	Trapezoidal
Packaging unit	5 pc.
Sterile	Yes

STERILE

[Home page](#) > Online Catalog - Human Medicine

41335RN

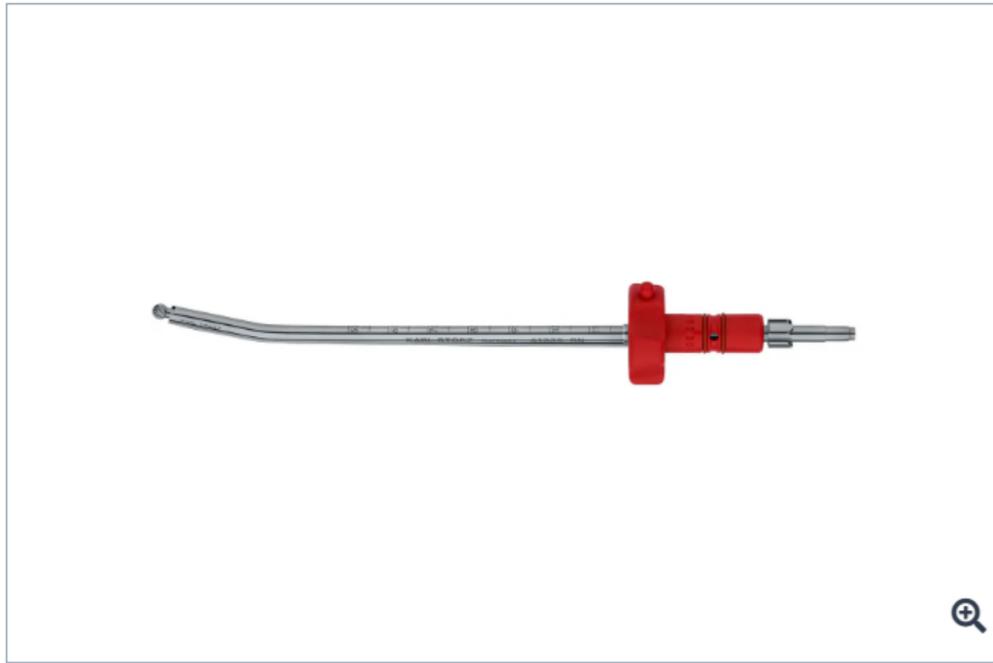

Item no: 41335RN

Sinus Burr 35k, sterile, 5x

Quantity:

– 1 +

On the offer list

Technical details

Documents & Films

Product group / field of application

Sheath	Curved
Diameter drill head	4.0 mm
Total length	12 cm
Rotation max.	35000 rpm
Condition of drill head	Standard
Shape drill head	Round
Packaging unit	5 pc.
Sterile	Yes



30103M1



Item no: 30103M1

Multifunctional Valve, size 11 mm

Quantity:

Technical details

Documents & Films

Product group / field of application

Size 11 mm

Color code Green

Sterile No

Type of usage Reusable

30160M1



Item no: 30160M1

Multifunctional Valve, size 6 mm

Quantity:

Technical details

Documents & Films

Product group / field of application

Size 6 mm


Valve type Multifunctional valve

Color code Black

Sterile No

Type of usage Reusable

34210MS



Item no: 34210MS

CLICKLINE Scissors Insert

Quantity:

Technical details

Documents & Films

Product group / field of application

Brand	CLICKLINE
Size	5 mm
Working length	30 cm
Jaw shape	Curved
Type of usage	Reusable
Jaw length	15 mm
Sterile	No
Jaw mobility	Double action jaws
Author	METZENBAUM

34310MS



Item no: 34310MS

CLICKLINE Scissors Insert

Quantity:

Technical details

Documents & Films

Product group / field of application

Brand	CLICKLINE
Size	5 mm
Working length	36 cm
Jaw shape	Curved
Type of usage	Reusable
Jaw length	15 mm
Sterile	No
Jaw mobility	Double action jaws
Author	METZENBAUM

34410MS



Item no: 34410MS

CLICKLINE Scissors Insert

Quantity:

Technical details

Documents & Films

Product group / field of application

Brand

CLICKLINE

Technical details

Documents & Films

Product group / field of application

Brand

CLICKLINE

Size

5 mm

Working length

43 cm

Jaw shape

Curved

Type of usage

Reusable

Jaw length

15 mm

Sterile

No


Jaw mobility

Double action jaws

Author

METZENBAUM

33151



Item no: 33151

CLICKLINE Plastic Handle


Quantity:

Technical details

Documents & Films

Product group / field of application


Material	Plastic
Shank mobility	Upper handle shank movable
With large contact area at the finger ring	Yes
Connector pin for bipolar coagulation	Yes
Connector pin for unipolar coagulation	Unipolar
Brand	CLICKLINE
Finger rest	Available

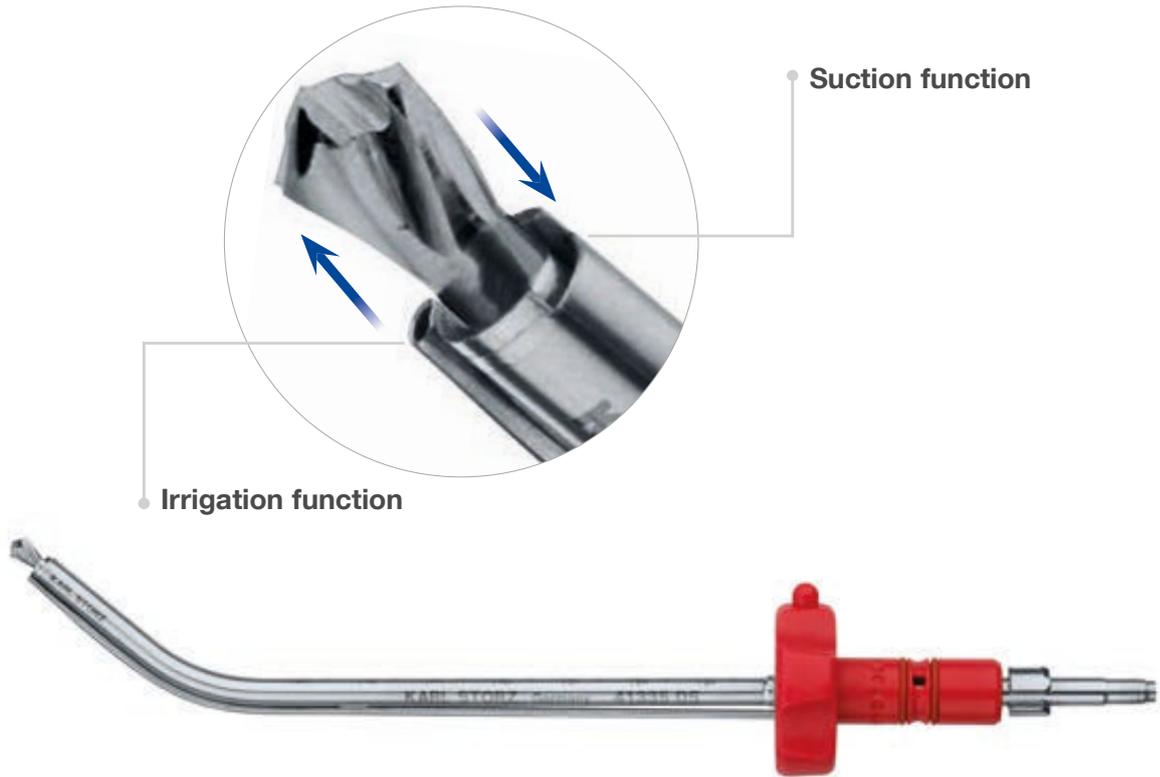

Detail	Sinus Burr 35k, with integrated irrigation, length 12 cm, sterile, for single use, package of 5, color code: red STERILE 	
	41335W	curved 40°, cylindrical, burr diameter 3 mm, shaft diameter 4 mm
	41335RN	curved 15°, bud drill, burr diameter 4 mm, shaft diameter 4 mm
	41335DW	curved 40°, diamond head, burr diameter 5 mm, shaft diameter 4 mm
	41335DT	curved 70°, diamond head, burr diameter 3.6 mm, shaft diameter 4 mm
	41335DS	curved 40°, diamond-shaped cutting, burr diameter 4 mm, shaft diameter 4 mm

High Frequency Cords

Unipolar High Frequency Cords, for use with Working Elements 27050C, 27050D, 27050E, 27050EP, 27050DP, 27054E, 27053E and 27033E



KARL STORZ Instrument	High Frequency Surgical Unit		
		277	Unipolar High Frequency Cord , with 4 mm plug, length 300 cm, for use with AUTOCON® III and AUTOCON® II, compatible with Erbe type, older models
		277A	Unipolar High Frequency Cord , with 4 mm plug, length 300 cm, compatible with Martin HF units
		277KE	Unipolar High Frequency Cord , with 5 mm plug, length 300 cm, for use with AUTOCON® III and AUTOCON® II, compatible with Erbe ICC units
		277KB	Unipolar High Frequency Cord , with 8 mm plug, for use with AUTOCON® III and AUTOCON® II, compatible with Valleylab units

Bipolar High Frequency Cords, for use with Working Elements 27040DB, 27040EB, 27040DO, 27040EO and 27054EB



KARL STORZ Instrument	High Frequency Surgical Unit		
		UH801	Bipolar High Frequency Cord , for KARL STORZ AUTOCON® III 400, length 400 cm, with RFID coding system, reusable 20 times, for use with KARL STORZ bipolar resectoscopes
		27176LEB	Bipolar High Frequency Cord , for AUTOCON®II 400 SCB (high-end), length 400 cm, for use with KARL STORZ bipolar resectoscopes

Please note: All high frequency cords are delivered with a length of 300 cm. If a length of 500 cm is required, please add the letter L to the part number, e.g., 277KEL.

Diameter 5 mm, length 29 cm



- | | | |
|------------|----------------|---|
| | 26046BA | |
| <p>0°</p> | 26046AA | <p>HOPKINS® Straight Forward Telescope 0°, enlarged view, diameter 5 mm, length 29 cm, autoclavable, fiber optic light transmission incorporated, color code: green</p> |
| <p>30°</p> | 26046BA | <p>HOPKINS® Forward-Oblique Telescope 30°, enlarged view, diameter 5 mm, length 29 cm, autoclavable, fiber optic light transmission incorporated, color code: red</p> |
| <p>45°</p> | 26046FA | <p>HOPKINS® Telescope 45°, enlarged view, diameter 5 mm, length 29 cm, autoclavable, fiber optic light transmission incorporated, color code: black</p> |



533TVA **Adaptor, autoclavable**, permits telescope changing under sterile conditions

Diameter 10 mm, length 31 cm



- | | | |
|------------|----------------|--|
| | 26003BA | |
| <p>0°</p> | 26003AA | <p>HOPKINS® Straight Forward Telescope 0°, enlarged view, diameter 10 mm, length 31 cm, autoclavable, fiber optic light transmission incorporated, color code: green</p> |
| <p>30°</p> | 26003BA | <p>HOPKINS® Forward-Oblique Telescope 30°, enlarged view, diameter 10 mm, length 31 cm, autoclavable, fiber optic light transmission incorporated, color code: red</p> |
| <p>45°</p> | 26003FA | <p>HOPKINS® Telescope 45°, enlarged view, diameter 10 mm, length 31 cm, autoclavable, fiber optic light transmission incorporated, color code: black</p> |

07-22