



Safety switch.

Long reinforced fold-out droplet.

Cutting mechanisms of the PROFESSIONAL series are equipped with bearings and cutting shafts of increased durability.


Shaft cover.

Strong, welded frame made of steel profiles.

Torsional, foldable belt conveyor with steel paddels (hydraulically driven).

Manual belt winch with safety chain.

Wood chipper powder coated.

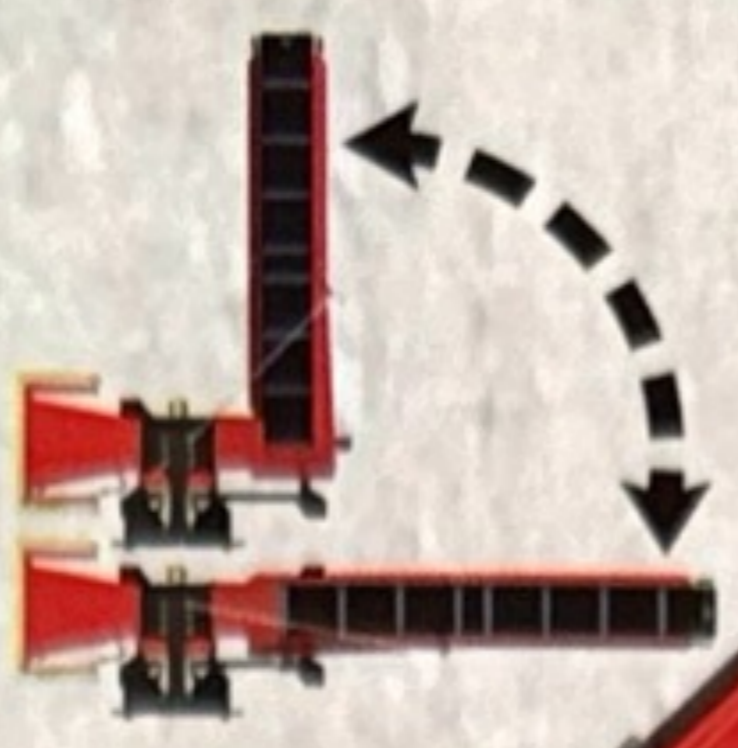

Flywheel with cover (optional)

- RP-100 & RP-120, ø360 mm, 38 kg
- RP-150, ø420 mm, 50 kg
- RP-200, ø500 mm, 70 kg




Chippers with PTO drive belts from PROFESSIONAL series are equipped with belt winch for positioning the conveyor height and a chain for locking the position.



The turntable conveyors have a hydraulic drive with a flow regulator.

Belt conveyors can work along or across the chipper.

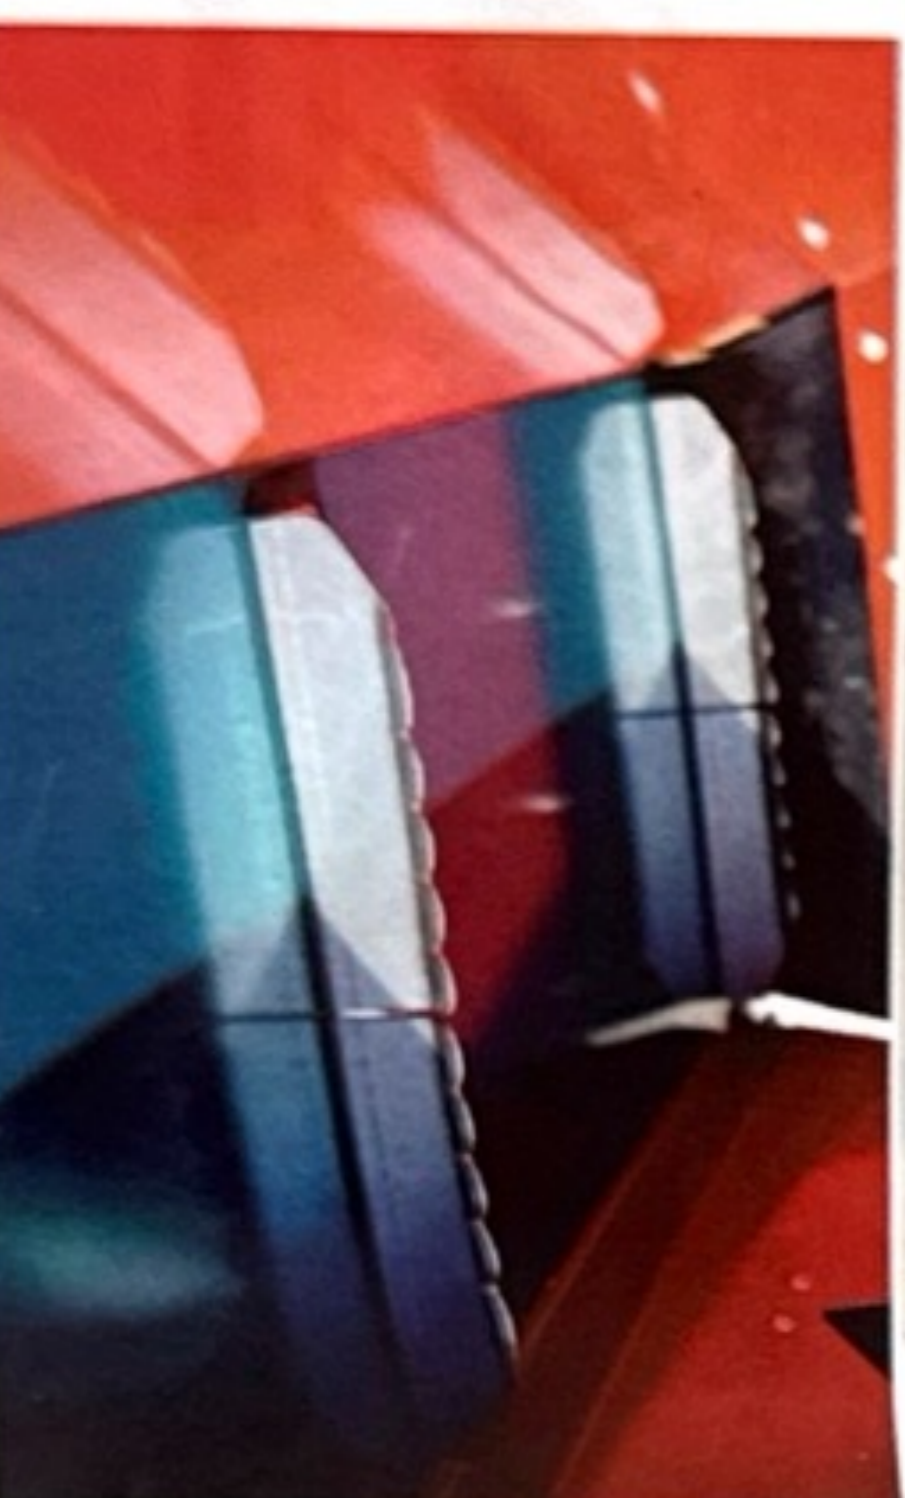

The conveyor belt is equipped with paddels (made of galvanized steel).

Chip conveyor belts are available in 3 working lengths: 230, 300 and 400 cm.



**MINIMUM / RECOMMENDED POWER:** 15/25 HP  
**MAX DIAMETER OF CUTTING:** fresh soft wood: 90 mm, fresh hard wood: 80 mm, dry hard wood: 70 mm  
**LENGTH OF CUTTING:** 4-blade mechanism: 9-18 cm, 6-blade mechanism: 7-14 cm  
**LENGTH / WIDTH CONVEYOR BELT:** 230/25 cm  
**WEIGHT:** 275 kg

**RP-100**



**MINIMUM / RECOMMENDED POWER:** 25/35 HP  
**MAX DIAMETER OF CUTTING:** fresh soft wood: 110 mm, fresh hard wood: 100 mm, dry hard wood: 90 mm  
**LENGTH OF CUTTING:** 6-blade mechanism: 8-15 cm, 8-blade mechanism: 5-10 cm  
**LENGTH / WIDTH CONVEYOR BELT:** 230/25 cm  
**WEIGHT:** 310 kg

**RP-120**



**MINIMUM / RECOMMENDED POWER:** 45/80 HP  
**MAX DIAMETER OF CUTTING:** fresh soft wood: 130 mm, fresh hard wood: 110 mm, dry hard wood: 100 mm  
**LENGTH OF CUTTING:** 6-blade mechanism: 12-18 cm, 8-blade mechanism: 10-15 cm  
**LENGTH / WIDTH CONVEYOR BELT:** 300/30 cm  
**WEIGHT:** 440 kg

**RP-150**



**MINIMUM / RECOMMENDED POWER:** 90/150 HP  
**MAX DIAMETER OF CUTTING:** fresh soft wood: 160 mm, fresh hard wood: 150 mm, dry hard wood: 140 mm  
**LENGTH OF CUTTING:** 6-blade mechanism: 18-30 cm, 8-blade mechanism: 15-25 cm  
**LENGTH / WIDTH CONVEYOR BELT:** 300/30 cm  
**WEIGHT:** 600 kg

**RP-200**



**MINIMUM / RECOMMENDED POWER:** 70/100 HP  
**MAX DIAMETER OF CUTTING:** fresh soft wood: 170 mm, fresh hard wood: 160 mm, dry hard wood: 150 mm  
**LENGTH OF CUTTING:** 6-blade mechanism: 18-30 cm, 8-blade mechanism: 15-25 cm  
**FLYWHEEL WEIGHT:** 70 kg  
**LENGTH / WIDTH CONVEYOR BELT:** 400/40 cm  
**WEIGHT:** 800 kg

**RP-200 SUPER**



**MINIMUM / RECOMMENDED POWER:** 70/100 HP  
**MAX DIAMETER OF CUTTING:** fresh soft wood: 170 mm, fresh hard wood: 160 mm, dry hard wood: 150 mm  
**LENGTH OF CUTTING:** 6-blade mechanism: 18-30 cm, 8-blade mechanism: 15-25 cm  
**FLYWHEEL WEIGHT:** 70 kg  
**LENGTH / WIDTH CONVEYOR BELT:** 400/40 cm  
**WEIGHT:** 800 kg