


MAXIMUM FLOW-RATE	2 mc/min
WORKING TEMPERATURE	- 15 C° + 140 C°
PRESSURE DROP AT MAXIMUM FLOW-RATE WITH NEW ELEMENT	18 kPa
OIL CARRY OVER IN COMPRESSED AIR	1/3 PPM
INNER SUPPORT	Thickness 10/10 Perf.Rate 46 %
INTERMEDIATE SUPPORT	Thickness 10/10 Perf.Rate 46 %
COALESCING POLYESTER	Ten.10001
MICROFIBRE	Ten.10101
ALL METAL PARTS	Zinc Plated - DD12
ADHESIVE	TWO-COMPONENT
QUALITY CONTROL	TGQ
TEST	TGQ

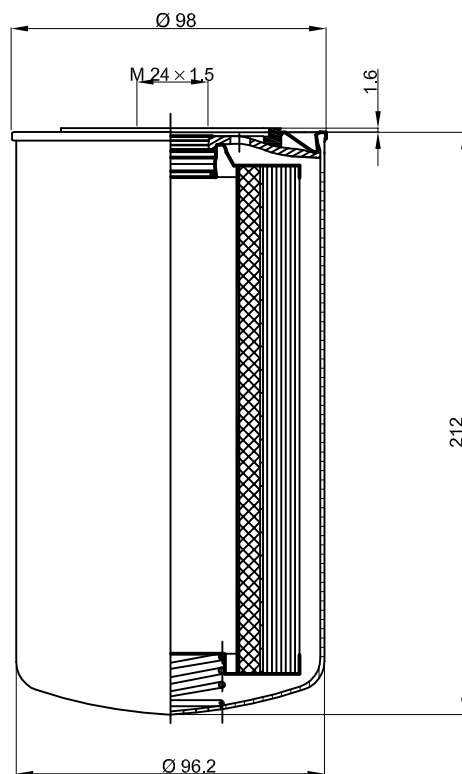

TYPE AIR / OIL SEPARATOR	DATE 01.02.2020	 T.G.FILTER S.r.l. Via Nazioni Unite, 32 10093 Collegno (TO) ITALY Tel. +39 0114531175 Tel. +39 0114544009 FAX. +39 0114559896 Web: www.tgfilter.it E-mail: tgfilter@tgfilter.it
	T.G. 96 210 Rev. 0	
	PRINT SIZE - A4	
PART N° 96 210		

QUESTO DISEGNO E' DI PROPRIETA' DI T.G. FILTER S.r.l. E' VIETATA OGNI COPIA O RIPRODUZIONE SENZA AVER RICEVUTO AUTORIZZAZIONE SCRITTA. OGNI VIOLAZIONE SARA' PERSEGUITA SECONDO I TERMINI DI LEGGE PREVISTI.
THIS DRAWING IS EXCLUSIVE PROPERTY OF T.G. FILTER S.r.l. ANY COPY OR REPRODUCTION IS STRICTLY PROHIBITED WITHOUT HAVING WRITTEN AUTHORIZATION. EVERY VIOLATION WILL BE PUNISHED ACCORDING TO THE TERMS OF LAW PROVIDED.