

SURFTEST SJ-210/310 SERIES

Portable Surface Roughness Tester



Portable Surface Roughness Tester


Surftest SJ-210/310 Series

Compact but Highly Functional

These surface roughness testers with refined user-friendliness have been a customer favorite for many years.

Surftest SJ-210 Series

The exceptionally convenient and compact surface roughness tester that can be carried around like a handheld tool, perfect for on-site use.

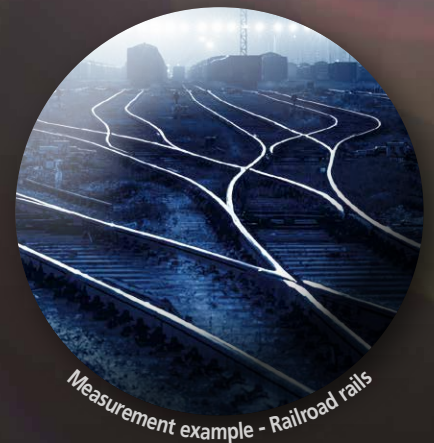

With constant use throughout many industries for over 20 years, the SJ Series has been recognized as the pioneers of compact surface roughness testers!

With overwhelming performance, they contribute to manufacturing all over the world.

Surftest SJ-310 Series

A compact surface roughness tester that not only has superior functionality and portability but also a built-in printer.



Tackle Your Challenges With the **SJ-210/310** Series!

Case 1

Not content with your current tester?

I require a device that clearly displays roughness during measurement and prints the results quickly.

Case 2



Fed up with transporting the workpieces to a stationary device?

Carrying workpieces to the inspection room a time-consuming pain.

I need a way to measure different surfaces on the workpiece without moving it around.


Case 3



Don't own a surface roughness measuring machine?

Measuring roughness seems difficult...

Can I do it myself?



With the **SJ-210/310 Series...**

You can measure while checking roughness from the waveform!

Printing completes in just a few seconds! (**SJ-310**)



With the **SJ-210/310 Series...**

No need to haul large, heavy workpieces because you can measure on-site!

Lightweight and compact, you can measure any side without trouble!



With the **SJ-210/310 Series...**

Anyone can measure easily with skidded measurement*!

* A measurement method where leveling of the measurement surface is simplified since displacement is measured relative to the "skid" that follows the workpiece surface.



So easy that anyone can use it!

Reduces data input labor significantly:

Wireless measurement data communication system

U-WAVE (optional)



Example of SJ-210 installation



Example of SJ-310 installation

"U-WAVE" is a system that allows measured parameter values to be imported to commonly used software (Excel, notepad, etc.) at the touch of a button. Being wireless, it does not affect the operability during measurement, and contributes to reducing data input labor and error, thereby improving work efficiency.



U-WAVE-R
(Connects to the PC)
02AZD810D



U-WAVE-T*
(Connects to the SJ-210/310 Series)
02AZD880G
* Requires separate connection cable.
02AZD790D

Input at the touch of a button

USB INPUT TOOL (optional)

An interface that transmits the calculation results of the SJ-210/310 Series via USB to spreadsheet software on a PC allows you to input calculation results (numerical values) at the touch of a button. Allows you to input the calculation results (numerical values) at the touch of a button.



USB Input Tool-Direct
USB-ITN-D
06AFM380D





USB keyboard signal conversion type*
IT-016U
264-016-10
* Requires separate connection cable.
1 m: **936937**
2 m: **965014**

Time-saving and user-friendly! Advanced free software!

Further improve convenience by linking with a PC

USB Communication Tool for SURFTEST SJ

The program can not only start a measurement or change measurement conditions from a PC, but also create inspection record tables using Microsoft Excel macros. This allows you to operate **SJ-210/310 Series** more conveniently and significantly reduce the time needed for creating reports.

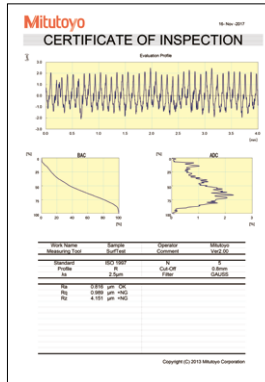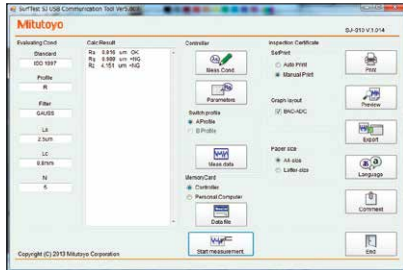

This program can be downloaded free of charge from the Mitutoyo website.
https://www.mitutoyo.eu/en_us/downloads/software-and-updates

Required environment

- OS: Windows 7, Windows 8, Windows 10
- Spreadsheet software: Microsoft® Excel 2010, Microsoft® Excel 2013, Microsoft® Excel 2016, Microsoft® Excel 2019, Office365® ProPlus (Windows10 Pro)

Note: Windows OS, Microsoft® Excel, and Office365 ProPlus are products of Microsoft Corporation.

A separate USB cable is also required.

- USB cable for **SJ-210 Series** (2 m)
12AAL068
 Note: Commercially available USB Mini Type B cable or equivalent
- USB cable for **SJ-310 Series**
12AAD510
 Note: Commercially available USB Type B cable or equivalent

Optional combinations!

Improve work efficiency by utilizing diverse options

Contour / Roughness analysis software FORMTRACEPAK-AP

Data collected by the **SJ-210/310 Series** can be loaded to **FORMTRACEPAK-AP**, a form assessment/analysis software package, via a memory card (optional) for more advanced analysis.

Digimatic mini processor DP-1VA LOGGER

Simply connect this printer to the SurfTest **SJ-210/310 Series'** digimatic output and print* calculation results, perform a variety of statistical analyses, draw a histogram or D chart, and also perform complicated operations for X-R control charts.

* The symbol 'µm' is not printable, but measurement results can still be printed out without setting the measurement unit.



264-505

- **SJ-210/310 Series** → **DP-1VA LOGGER** Connecting cable
 1 m: 936937
 2 m: 965014

Foot switch

Start and stop measurements just by tapping! Allows you to significantly increase efficiency in measurements where large numbers of the same workpiece are fixed and measured in one go.



12AAJ088

Memory card (2 GB)



12AAW452

Note 1: micro SD card (with a conversion adapter to SD card)

Note 2: Not all memory cards can be recognized. Please use the optional SD memory card.

- SJ-210/310 Linkage -

easy-to-carry **SJ-210**,
highly
e.

The diagram illustrates a network setup. At the top center is a larger white device, the SJ-210, which has a screen displaying a waveform and a small printer on the left side. Below it, four smaller, identical white devices are arranged in a row. Each of these smaller devices has a screen displaying a grid. An orange line connects the four smaller devices to the central larger device. From each smaller device, an orange line goes up to a horizontal orange bar. From this bar, an orange line goes down to the central larger device. Above the central larger device, there is a small black cable with a connector.

[illegible]

- Single-Screen Parameter List -



2020/09/28 SPC  

 Parameters

Standard ISO1997

Profile R

Ra	Rq	Rz
Rp	Rv	Rsk
Rku	Rc	RSm
RAq	Rmr	Rmr (c)
Rdc	Rt	Rz1max
Rk	Rpk	Rvk

Re-Cal c. Submenu

The screenshot shows the 'Parameters' screen with the following settings:

- Standard:** ISO1997
- Profile:** R
- Parameters:** Ra, Rq, Rz, Rp, Rv, Rsk, Rku, Rc, R_{Pc}, R_{Sm}, R_{Aq}, Rmr, Rmr (c), R_{Qc}, Rt, Rz1max, Rk, Rpk, Rvk, Mr1

The 'Ra' parameter is highlighted with a red box.

Parameter setting on SJ-310


Don't stress about hard-to-see points with reliable contact detection!

- Contact Status Screen Display -




The detector contact status can be reliably judged by the red or blue colors on the display.



Display of SJ-210





Display of SJ-310



No more erroneous measurements from vibrations!

- Self-Timer -


No need to worry about erroneous measurements due to vibration since measurement can be started after the vibration subsides.



Using passwords means less worries for administrators!

- Function Restriction -

Allows locking of optional items, such as measurement and calibration conditions. Prevents erroneous measurements due to a careless setting change or accidental operation.



Password setting



SJ-210 Series - Further Sophisticated Functions

Outstanding visibility! 2.4-inch color graphic LCD

A clear and easy to read large screen with backlight.

Clearly arranged GO/NG judgment screen

Clearly determine results at a glance -
pass and fail are indicated in different colors.

2020/09/28	SPC		
ISO1997	0.5 mm/s	λc 0.8	x5
Ra	0.664	OK	μm
Rq	0.808	+NG	μm
Rz	3.767	+NG	μm
Rp	1.866	-NG	μm

User-friendly operation keys: No more accidental operation!

Frequently used keys are arranged on the top surface of the
main unit.

Rarely used keys are located under the cover
to prevent accidental operation.



Shortcuts for intuitive operation

Display settings can be easily changed by operating the [←] and [→] keys inside the cover. For example, cutoff value (λ_c), and number of segments (N) can be easily switched on the measurement screen.



Perfectly mobile: Easy to carry

Convenient, dedicated case for comfortable carrying (Standard accessory)



High-speed measurement data transmission

Equipped with several I/O ports, including a high-speed USB interface, as standard.



Printer for SJ-210 (optional)

Assessed profiles, calculation results, and curves can be printed out by connecting the SJ-210-dedicated printer. Palm-sized (WxDxH: 93x125x70 mm) and with an internal battery, it can go where you go.

- Selectable power-supply (AC adapter or battery pack)
- Printable values: Measurement conditions, calculation results, assessed profile, bearing area curve (BAC), amplitude distribution curve (ADC), and environment settings.



178-421D



Example of a printout

Printer supplies:

- Printing paper standard type (5 rolls) 270732
- Durable printer paper (5 rolls) 12AAA876

Surftest SJ-210 Series

SJ-310 Series - Further Sophisticated Functions




Supports measurement with outstanding visibility on the large 5.7-inch color LCD

The large touch-panel LCD provides optimum operability for smooth measurements.



The built-in high-speed printer, allows for printing measurement results anytime and anywhere

All processes from measuring to printing the measurement results can be completed just by pressing a single button. Printing takes just a few seconds!

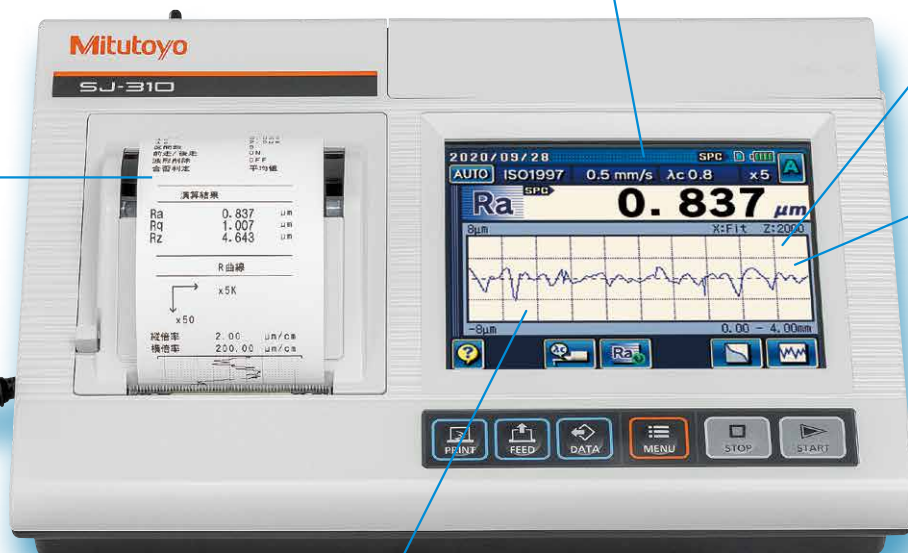


The simultaneous two-curve assessment function enables advanced utilization of measurement data

Allows acquisition of calculation and analysis results according to two different assessment conditions from one measurement.

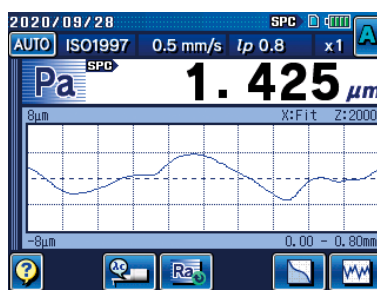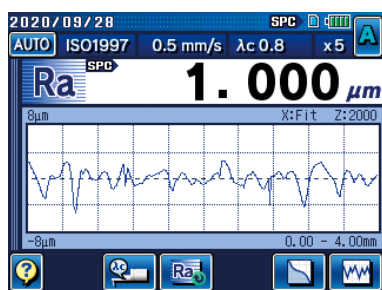

The delete function widens the utilization range of the data


Allows calculation by partially deleting abnormal results, such as cracks.

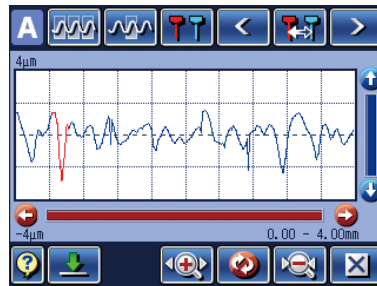

Coordinate difference analysis promptly picks up the workpiece status





Allows calculation of the coordinate difference between two waveform points.

This lets you check workpiece unevenness on the screen, without printing.

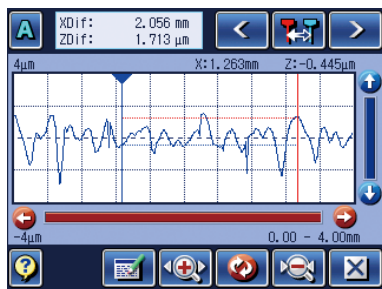

Statistical processing for perfect data management

Capable of up to 300 statistical measurements for a maximum of three parameters, enabling routine data to be appropriately managed.

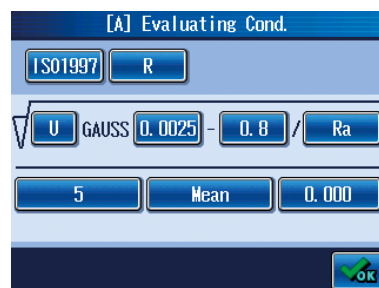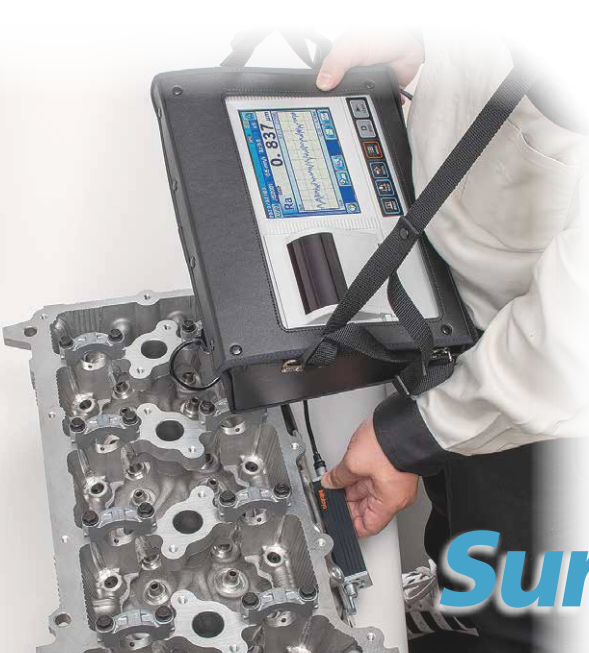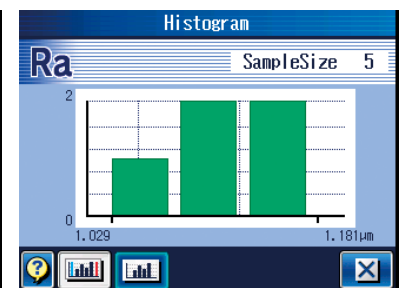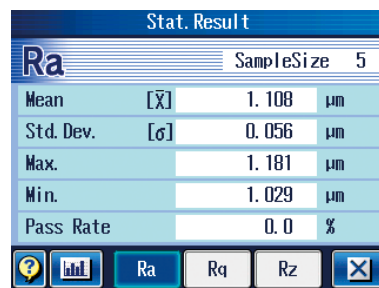

Condition inputting possible in drawing instruction format

Also allows for assessment condition inputting using drawing instruction symbols compliant with ISO/JIS roughness standards.

Surftest SJ-310 Series

SJ-210 Series Specifications

Type of detector			Standard drive unit type		Retractable drive unit type		Transverse tracing drive unit type	
Model No.			SJ-210 (0.75 mN type)	SJ-210 (4 mN type)	SJ-210R (0.75 mN type)	SJ-210R (4 mN type)	SJ-210S (0.75 mN type)	SJ-210S (4 mN type)
Order No.	mm		178-560-11	178-560-12	178-562-11	178-562-12	178-564-11	178-564-12
	inch/mm		178-561-11	178-561-12	178-563-11	178-563-12	178-565-11	178-565-12
X-axis			16,0 mm				5,6 mm	
Measuring range	Z-axis (Detector)	Range	360 μm (-200 μm to +160 μm)					
		Range/ Resolution	360 μm/0,02 μm					
			100 μm/0,006 μm					
			25 μm/0,002 μm					
Measuring speed			When measuring: 0,25 mm/s, 0,5 mm/s, 0,75 mm/s When returning: 1 mm/s					
Measuring force/Stylus tip			0,75 mN type: 0,75 mN/2 μmR 60°, 4 mN type: 4 mN/5 μmR 90°					
Skid force			400 mN or less					
Applicable standards			JIS '82/JIS '94/JIS '01/ISO '97/ANSI/VDA					
Assessed profiles			Primary profile, Roughness profile, DF profile, Roughness profile-Motif					
Parameters			Ra, Rc, Ry, Rz, Rq, Rt, Rmax ^{*1} , Rp, Rv, R3z, Rsk, Rku, Rc, RPl, Rsm, Rz1max ^{*2} , S, HSC, Rz1S ^{*3} , Rppi, RΔa, RΔq, Rlr, Rmr, Rmr(c), Rδc, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo, Rpm, tp ^{*4} , Htp ^{*4} , R, Rx, AR, Possible Customize					
Graph analysis			Bearing area curve, Amplitude distribution curve					
Filters			Gaussian, 2CR75, PC75					
Cut off length	λc		0,08, 0,25, 0,8, 2,5 mm					
	λs ^{*5}		2,5, 8 μm					
Sampling length			0,08, 0,25, 0,8, 2,5 mm					
Number of sampling lengths			×1, ×2, ×3, ×4, ×5, ×6, ×7, ×8, ×9, ×10, arbitrary length (0,3 to 16,0 mm: 0,01 mm interval)				×1, ×2, ×3, ×4, ×5, ×6, ×7, ×8, ×9, ×10, arbitrary length (0,3 to 5,6 mm: 0,01 mm interval)	
LCD dimensions			36,7×48,9 mm					
Display languages			All models except 178-560-13D: Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Traditional Chinese, Simplified Chinese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch 178-560-13D: Japanese, English, Russian, Slovenian, Rumanian, Bulgarian, Finnish, German, French, Italian, Spanish, Czech, Polish, Hungarian, Turkish, Swedish					
Measurement result display			Vertical display: 1-parameter display/3-parameter display/Trace display Horizontal display: 1-parameter display/4-parameter display/Trace display (Horizontal display is invertible)					
Printing function ^{*6} (Dedicated printer is required separately)			Measurement conditions/Calculation results/GO/NG judgement result/Calculation results for each sampling length/ Assessed profile/Bearing area curve/Amplitude distribution curve/Environment setting information					
External I/O			USB I/F, Digimatic Output, Printer Output, RS-232C I/F, Foot SW I/F					
	Customization		Desired parameters can be selected for calculation and display					
	GO/NG judgment ^{*7}		By max value/16 %/Standard deviation					
	Storage of measurement condition		Save the conditions at power OFF					
Functions	Storage		Internal memory: Measurement condition (10 sets) Memory card (optional): 500 measurement conditions, 10000 measured profiles, 500 display images Text file (Measurement conditions/Measured profile/Assessed profile/ Bearing area curve/Amplitude distribution curve)					
	Calibration		Auto-calibration with the entry of numerical value/ Average calibration with multiple measurements (Max. 5 times) is available					
Power-saving function			Auto-sleep function (10-600 sec) ^{*8}					
Power supply			Two-way power supply: battery (rechargeable NiMH battery) and AC adapter Note 1: Charging time: about 4 hours (may vary due to ambient temperature) Note 2: Endurance: about 1000 measurements (differs slightly due to use conditions/environment)					
Size (WxDxH)	Display unit		52,1×65,8×160 mm (sliding cover closed, detector not mounted)					
	Drive unit		115×23×26 mm (detector not mounted)					
Mass			About 500 g (Display unit + Drive unit + Standard detector)					
Standard accessories			12BAA303 Connecting cable ^{*9} 178-601 Roughness specimen (Ra 3 μm) 12BAR344 Carrying case 12BAK700 Calibration stage Protective sheets for display, AC Adapter, Operation manual, Quick reference manual, Warranty				12BAA303 Connecting cable ^{*9} 178-605 Roughness specimen (Ra 1 μm) 12AAE643 Point-contact adapter 12AAE644 V-type adapter 12BAR344 Carrying case 12BAK700 Calibration stage Protective sheets for display AC Adapter, Operation manual Quick reference manual, Warranty	

*1 Calculation is available only when selecting the VDA, ANSI, or JIS '82 standard.

*2 Calculation is available only when selecting the ISO '97 standard.

*3 Calculation is available only when selecting the JIS '01 standard.

*4 Calculation is available only when selecting the ANSI standard.

*5 Not available when selecting the JIS '82 standard.

*6 Order the **SJ-210** printer (**178-421D**, optional accessory) separately.

*7 Standard deviation can only be selected in ANSI. 16 % rule cannot be selected in VDA.

*8 Auto-sleep function is invalid when AC adaptor is used.

*9 For connecting the calculation display unit and drive unit.

Note 1: Refer to pages 18 to 19 for details about consumables and options.


Note 2: To denote your AC line voltage add the following suffixes (e.g. **178-560-11A**).

A for 120 V, C for 100 V, D for 230 V, E for 230 V (for UK), DC for 220 V (for China), K for 220 V (for Korea)


SJ-210 Series Dimensions

- Drive unit stored inside display unit (Standard detector installed in drive unit)

Unit: mm

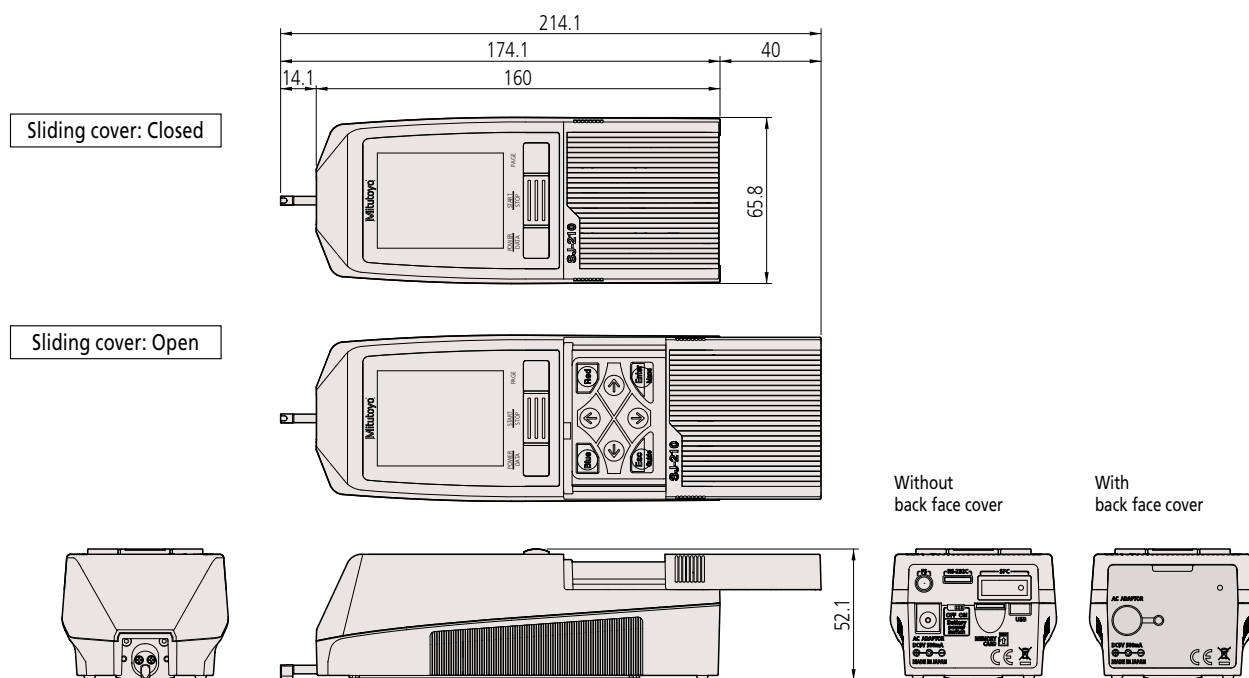

- Drive unit not stored inside display unit (Standard detector installed in drive unit)

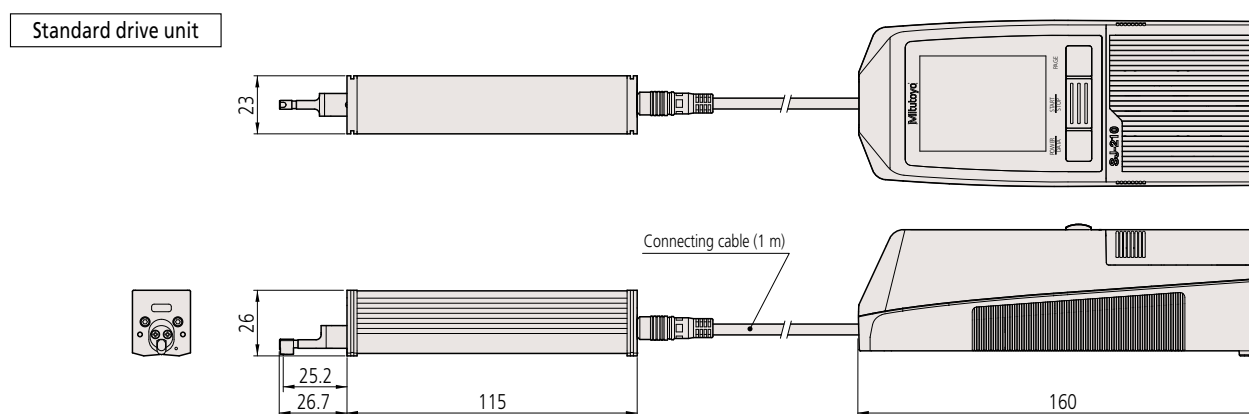

SJ-310 Series Specifications

Type of detector			Standard drive unit type		Retractable drive unit type		Transverse tracing drive unit type			
Model No.			SJ-310 (0.75 mN type)	SJ-310 (4 mN type)	SJ-310R (0.75 mN type)	SJ-310R (4 mN type)	SJ-310S (0.75 mN type)	SJ-310S (4 mN type)		
Order No.	mm	178-570-11	178-570-12	178-572-11	178-572-12	178-574-11	178-574-12			
	inch/mm	178-571-11	178-571-12	178-573-11	178-573-12	178-575-11	178-575-12			
X-axis		16.0 mm					5.6 mm			
Measuring range	Range	360 μm (-200 μm to +160 μm) [14400 μinch (-7900 μinch to +6300 μinch)]								
	Detector	360 μm/0,02 μm 100 μm/0,006 μm 25 μm/0,002 μm								
	Range/ resolution									
Measuring speed			When measuring: 0,25 mm/s, 0,5 mm/s, 0,75 mm/s, When returning: 1 mm/s							
Measuring force/Stylus tip			0,75 mN type: 0,75 mN/2 μmR 60°, 4 mN type: 4 mN/5 μmR 90°							
Skid force			400 mN or less							
Applicable standards			JIS '82/JIS '94/JIS '01/ISO '97/ANSI/VDA							
Assessed profiles			Primary profile, Roughness profile, DF profile, Roughness profile-Motif, W-Motif							
Parameters			Ra, Rc, Ry, Rz, Rq, Rt, Rmax ¹ , Rp, Rv, R3z, Rsk, Rku, Rc, Rpc, Rsm, Rz1max ² , S, HSC, RzJIS ³ , Rppi, RΔa, RΔq, Rlr, Rmr, Rmr(c), Rδc, Rk, Rpk, Rvk, Mr1, Mr2, A1, A2, Vo, λa, λq, LO, Rpm, tp ⁴ , Htp ⁴ , R, Rx, AR, W, AW, Wx, Wte, Possible Customize							
Graph analysis			Bearing area curve, Amplitude distribution curve							
Filters			Gaussian, 2CR75, PC75							
Cut-off length	λc	0,08, 0,25, 0,8, 2,5, 8 mm								
	λs ⁵	2,5, 8 μm								
Sampling length			0,08, 0,25, 0,8, 2,5, 8 mm							
Number of sampling lengths			x1, x2, x3, x4, x5, x6, x7, x8, x9, x10, Arbitrary (0.3 to 16.0 mm: 0.01 mm Interval)				x1, x2, x3, x4, x5, x6, x7, x8, x9, x10, Arbitrary (0.3 to 5.6 mm: 0.01 mm Interval)			
LCD dimensions			117.8x88.2 mm							
Display languages			Japanese, English, German, French, Italian, Spanish, Portuguese, Korean, Traditional Chinese, Simplified Chinese, Czech, Polish, Hungarian, Turkish, Swedish, Dutch							
Measurement result display			1-parameter display: one parameter measurement result 4-parameter display: four parameter measurement results Profile display: one parameter measurement result and the measured profile Trace display: The ten latest measurement results using the same parameter							
Printing function			Measurement conditions/Calculation results/GO/NG judgement result/Calculation results for each sampling length/ Tolerance value/Assessed profile/Graphic curve/Bearing area curve/Amplitude distribution curve/Environmental setting information							
External I/O			USB I/F, Digimatic output, RS-232C I/F, External SW I/F							
Functions	Customization	Desired parameters can be selected for calculation and display								
	GO/NG judgement ⁶	Max rule/16 % rule/Average rule/Standard deviation (1σ, 2σ, 3σ)								
	Storage of measurement condition	Save the condition at power OFF								
	Storage	Internal memory: Measurement condition (10 sets) Memory card (optional): 500 measurement conditions, 10000 measuring data, 500 statistic data, 10000 text data, 1 backup of machine setting, the last ten traces (Trace 10)								
	Calibration	Auto-calibration with the entry of numerical value /Average calibration with multiple measurements (Max. 12 times) is available								
Power-saving function			Auto-sleep function (30-600 sec) ⁷							
Power supply			Two-way power supply: battery (rechargeable Ni-MH battery) and AC adapter Note 1: Charging time: about 4 hours (may vary due to ambient temperature) Note 2: Endurance: about 1500 measurements (differs slightly due to use conditions/environment)							
Size (WxDxH)	Display unit	275x109x198 mm								
	Drive unit	115x23x26 mm (detector not mounted)								
Mass			About 1.8 kg (Display unit + Drive unit + Standard detector)							
Standard accessories			12AAW066 Connecting cable*8 178-601 Roughness specimen (Ra 3 μm) 357651 AC adapter 12AAA217 Nosepiece for plane surface 12AAA218 Nosepiece for cylinder 12AAA216 Supporting leg 12BAK700 Calibration stage 12BAR507 Stylus pen 12BAL402 Protection sheet 270732 Printer paper (5 rolls) 12BAL400 Carrying case Philips screwdriver, Strap for stylus pen, Operation manual, Quick reference manual, Warranty				12AAW066 Connecting cable*8 178-605 Roughness specimen (Ra 1 μm) 357651 AC adapter 12AAE643 Point-contact adapter 12AAE644 V-type adapter 12BAK700 Calibration stage 12BAR507 Stylus pen 12BAL402 Protection sheet 270732 Printer paper (5 rolls) 12BAL400 Carrying case Philips screwdriver, Strap for stylus pen, Operation manual, Quick reference manual, Warranty			

*1 Only for VDA/ANSI/JIS '82 standards.

*2 Only for ISO '97 standard.

*3 Only for JIS '01 standard.

*4 Only for ANSI standard.

*5 Not available for JIS '82 standard.

*6 Standard deviation can only be selected in ANSI.16 % rule cannot be selected in VDA.

*7 Auto-sleep function is invalid when AC adapter is used.

*8 For connecting the calculation display unit and drive unit.


Note 1: Refer to pages 18 to 19 for details about consumables and options.

Note 2: To denote your AC line voltage add the following suffixes (e.g. **178-570-11A**). A for 120 V, C for 100 V, D for 230 V, E for 230 V (for UK), DC for 220 V (for China), K for 220 V (for Korea)

SJ-310 Series Dimensions

• SJ-310 Series Display unit

Unit: mm

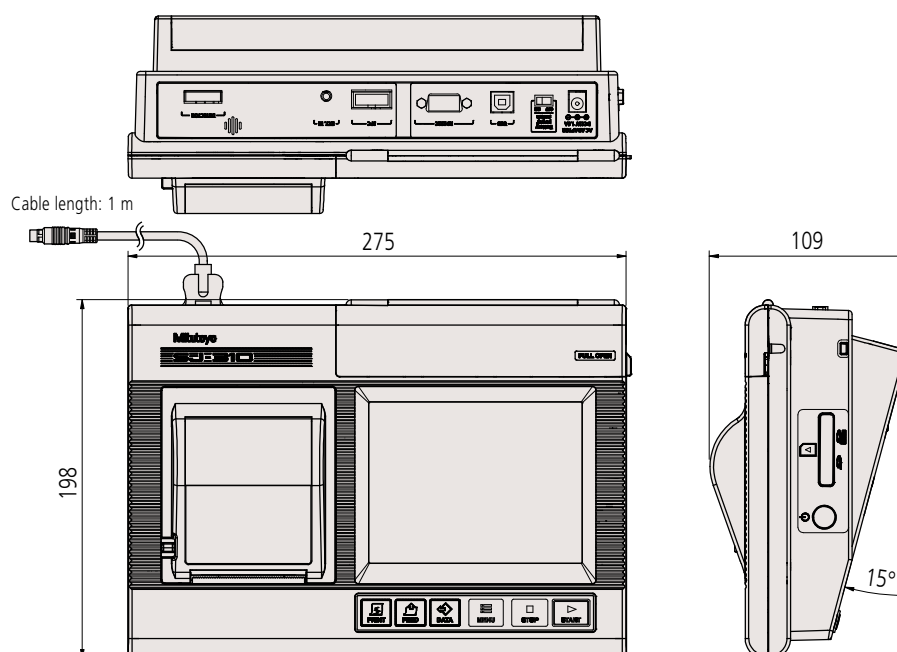

• Drive unit

Unit: mm


Drive unit type	Drive unit external view*
Standard drive unit	Technical drawing of the Standard drive unit. The front view shows a width of 115.0 mm and a height of 23.0 mm. The side view shows a depth of 26.0 mm and a 25.2 mm offset. The top view shows a 26.7 mm offset.
Retractable drive unit	Technical drawing of the Retractable drive unit. The front view shows a width of 115.0 mm and a height of 23.0 mm. The side view shows a depth of 26.0 mm and a 23.2 mm offset. The top view shows a 26.7 mm offset and a 2.0 mm offset.
Transverse tracing drive unit	Technical drawing of the Transverse tracing drive unit. The front view shows a width of 115.0 mm and a height of 23.0 mm. The side view shows a depth of 26.0 mm and a 45.5 mm offset. The top view shows a 47 mm offset and a 3.0 mm offset.

* External dimension for the models with standard detector conforms to each drive unit.

Detectors Dimensions

Unit: mm

Standard detectors

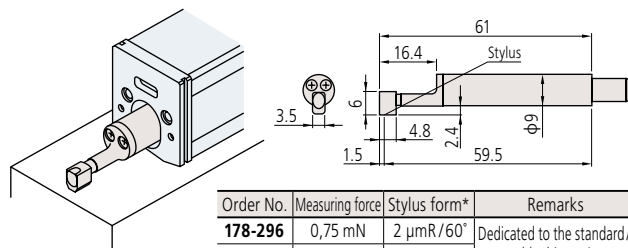


• Minimum measurable hole diameter
Hole depth=less than 12 mm: $\phi 7$ mm
Hole depth=12 - 22 mm: $\phi 12$ mm

Order No.	Measuring force	Stylus form*	Remarks
178-296	0,75 mN	2 $\mu\text{mR}/60^\circ$	Dedicated to the standard/retractable drive unit
178-390	4 mN	5 $\mu\text{mR}/90^\circ$	
178-387	0,75 mN	2 $\mu\text{mR}/60^\circ$	Dedicated to the transverse tracing drive unit
178-386	4 mN	5 $\mu\text{mR}/90^\circ$	
178-391	4 mN	10 $\mu\text{mR}/90^\circ$	Dedicated to the standard/retractable drive unit

* Tip radius/Tip angle


Small hole detectors

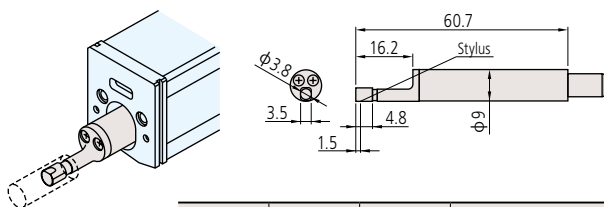

Order No.	Measuring force	Stylus form*	Remarks
178-383	0,75 mN	2 $\mu\text{mR}/60^\circ$	Minimum measurable hole diameter: $\phi 4.5$ mm
178-392	4 mN	5 $\mu\text{mR}/90^\circ$	

* Tip radius/Tip angle


Extra small hole detectors

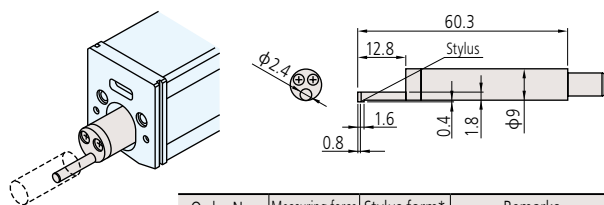

Order No.	Measuring force	Stylus form*	Remarks
178-384	0,75 mN	2 $\mu\text{mR}/60^\circ$	Minimum measurable hole diameter: $\phi 2.8$ mm
178-393	4 mN	5 $\mu\text{mR}/90^\circ$	

* Tip radius/Tip angle


Gear-tooth surface detectors

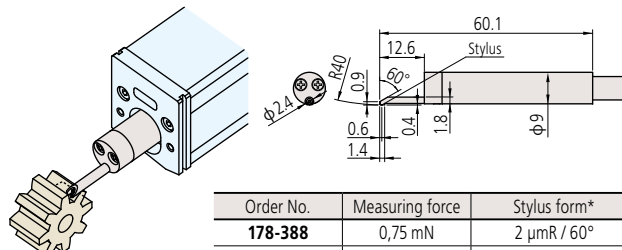

Order No.	Measuring force	Stylus form*
178-388	0,75 mN	2 $\mu\text{mR}/60^\circ$
178-398	4 mN	5 $\mu\text{mR}/90^\circ$

* Tip radius/Tip angle


Deep groove detectors

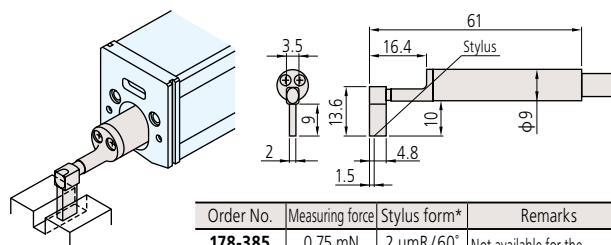

Order No.	Measuring force	Stylus form*	Remarks
178-385	0,75 mN	2 $\mu\text{mR}/60^\circ$	Not available for the transverse tracing drive unit
178-394	4 mN	5 $\mu\text{mR}/90^\circ$	

* Tip radius/Tip angle

• How to identify the stylus tip radius



Nose mounting screw (2 pcs.)
Black: 2 μm
White: 5 μm
Yellow: 10 μm

• Custom-made for special order

Any specified detector other than the above listed can be custom-made for special order. Please consult your local Mitutoyo sales office.

Optional Accessories for SJ-210 Series

• Optional accessories and consumables for SJ-210

Protective sheet for the color LCD (5-sheet set) **12AAL066**
Connecting cable (for SJ-210 Series) **12AAL067**

Optional Accessories for SJ-310 Series

• Optional accessories and consumables for SJ-310

Printer paper standard type (5 rolls) **270732**
Durable printer paper (5 rolls) **12AAA876**
Touch-screen protector sheet (10 sheets) **12AAN040**
Connecting cable (for SJ-310 Series) **12AAA882D**



Optional Accessories for SJ-210/310 Series

• Drive unit accessories

Nosepiece for flat surfaces




Note 1: Standard accessory for the standard/retractable drive unit of the **SJ-310** Series
Note 2: Not available for the transverse tracing drive unit.

Nosepiece for cylindrical surfaces




Note 1: Standard accessory for the standard/retractable drive unit of the **SJ-310** Series
Note 2: Not available for the transverse tracing drive unit.

Support feet set

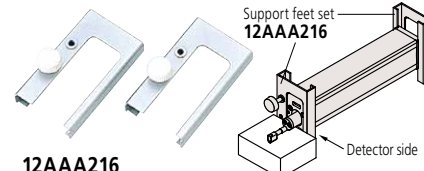


Note 1: Standard accessory for the standard/retractable drive unit of the **SJ-310** Series
Note 2: Not attachable to the detector side of the transverse tracing drive unit.

V-type adapter

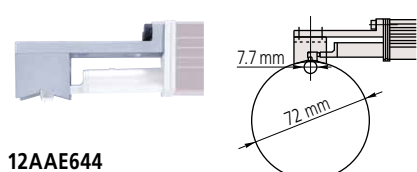

Note 1: Transverse tracing type standard accessory.
Note 2: Dedicated to the transverse tracing drive unit.


Point-contact adapter

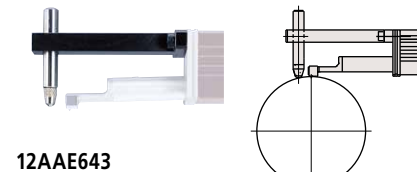

Note 1: Transverse tracing type standard accessory.
Note 2: Dedicated to the transverse tracing drive unit.


Extension rod (50 mm)

Note: Only one rod can be used.

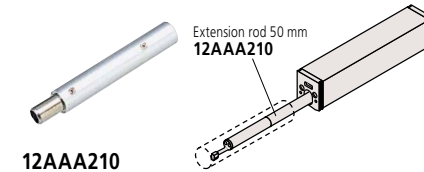


Note: Not available for the transverse tracing drive unit.

Vertical positioning adapter

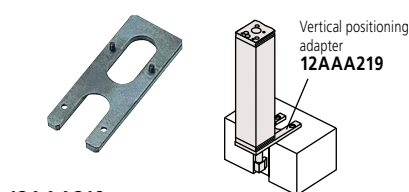


Note: Not available for the transverse tracing drive unit.

Height gauge adapter

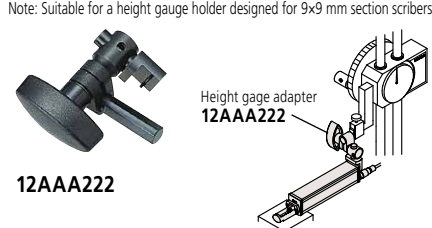

Note: Suitable for a height gauge holder designed for 9x9 mm section scribers.


Magnetic stand adapter

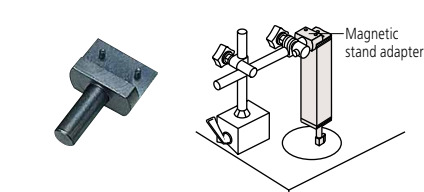

12AAA221
(Mounting spigot diameter is 8 mm)

12AAA220
(Mounting spigot diameter is 9.5 mm)

Roughness specimen Ra 0,4 / Ra 3 µm [mm]

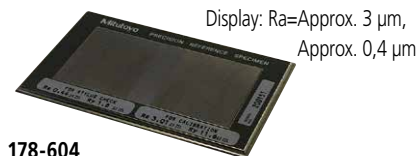

Note: Ra=Approx. 0.4 µm can only be used for stylus tip checking.

Extension cable (1 m)

Note: Only one rod can be used.

12BAA303

Note: For connecting calculation display unit and drive unit.

• Setting attachments Note: Not available for the transverse tracing drive unit

Enhances measurement efficiency by facilitating the measurement setup of multiple workpieces of the same type or the hard-to-access sections of a workpiece.

Setting attachment: V type for measuring in the cylinder axis direction

The V-width is adjustable to the cylinder diameter facilitating axial measurement of a wide range of cylinder diameters.

- Adjustable range:
ø5 - ø150 mm

178-033



Setting attachment: Slider type

This attachment is ideal for measuring a flat area of a workpiece that has an indentation or step that makes it difficult to attach the drive unit.

178-034



Setting attachment: Inside diameter type

Greatly facilitates measurement of internal wall surfaces of, for example, a cylinder block.

- Applicable diameter:
ø75 - ø95 mm
- Accessible depth:
30 - 135 mm

178-035




• Custom-made upon special order Any specified attachment other than the above listed can be custom-made for special order. Please consult your local Mitutoyo sales office.
Example: measurements for crankshaft, cylinder-block bores

Coordinate Measuring Machines




Vision Measuring Systems



Form Measurement




Optical Measuring



Sensor Systems

Test Equipment
and Seismometers


Digital Scale and DRO Systems

Small Tool Instruments
and Data Management

Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top-quality measuring products but one that also offers qualified support for the lifetime of the equipment backed up by comprehensive services, ensuring your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test, and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



Find additional product literature and our complete catalog here.

www.mitutoyo.eu

Note: Product illustrations are without obligation. Product descriptions, in particular all technical specifications, are only binding when explicitly agreed upon. MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company, and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

Mitutoyo

Mitutoyo Europe GmbH

Borsigstraße 8-10

41469 Neuss

Tel. +49 (0) 2137-102-0

Fax +49 (0) 2137-102-351

info@mitutoyo.eu

www.mitutoyo.eu