



R32
eco REFRIGERANT

5 ani
garantie
compresor


Specificatii tehnice ale aerului conditionat tip inverter split DC cu agent frigorific R32, noua eficienta pentru Europa

MODEL		TCL	R 32 - 24000 BTU
Tip			pompa de caldura
Tip control			telecomanda
Capacitatea de racire declarata	W		6810(1830~7810)
Capacitatea de incalzire declarata	W		6870(1850~7930)
SEER declarat *	W/W		6.5
Clasa energetica			A++
SCOP mediu declarat **	W/W		4.1
Clasa energetica			A+
Consumul anual de energie	Racire	kwh/a	366
	Incalzire	kwh/a	1878
Indepartarea umiditatii	l/h		1.8
Putere sonora interior (H/ML/Mute)	dB(A)		54/51/48/40
Putere sonora exterior	dB(A)		67
Presiune sonora interior	dB(A)		44/41/38/30
Presiune sonora exterior	dB(A)		57
Date electrice			
Alimentare			220-240V~/50Hz/1P
Domeniu tensiune		V	165~265
Curent	Racire	A	8.9(2.3~12.5)
	Incalzire	A	9.0(2.3~13.7)
Putere	Racire	W	1980(410~2800)
	Incalzire	W	2050(420~3000)
Sistemul refrigerant			
Refrigerant	Kg		R32/1.06Kg
Compresor	Tip		Rotativ
	Produsor		SANYO
Circulatia aerului la interior		m ³ /h	970/980
Tip ventilator interior			turbina axial-radial
Tip ventilator exterior			polipropilena

It's COOOOL !!!



Ambasador de brand
Neymar Jr.

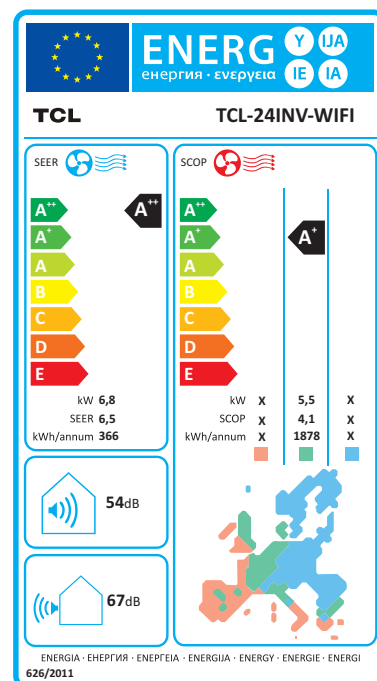

Conexiuni			
Cabluri de conectare	Nr. x Sectiune		4×0.75mm ²
Dispozitiv de expansiune			Valva expansiune electronica
Conducta de conectare	Gaz	Inch.	1/2"
	Lichid	Inch.	1/4"
Altele			
Domeniul de aplicare		m ²	27~45
Lungimea max. a conductei refriger.		m	25
Dif. de nivel max.		m	10
Domeniul temperaturii de lucru		°C	16-31
Domeniul temperaturii ambientale	Exterior	°C	Racire:0-53/Incalzire:-20-30
	Interior	°C	Racire:17-32/Incalzire:0-30
Dimensiuni nete	Interior	mm	1010×315×220
(W x H x D)	Exterior	mm	845×693×336
Masa neta	Interior	kg	13
	Exterior	kg	46
Dimensiuni de ambalare	Interior	mm	1096×390×297
(W x H x D) w/o cond.	Exterior	mm	960×732×400
w/i conducta	Exterior	mm	960×732×430
Masa bruta	Interior	kg	16
	Exterior	kg	52(fara kit)/55(cu kit)

* Rata eficientei energetice pe sezon

**Coeficient de performanta pe sezon