


Capac TEK Clasa B125 Rama rotunda Ø 785 – Ventilat

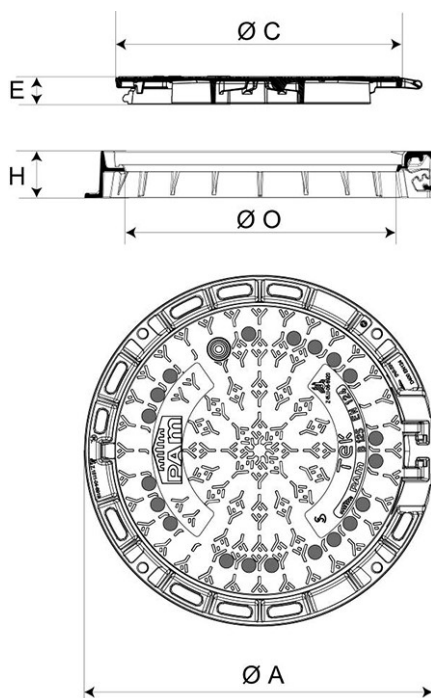

A	O	H	C	E	Greutate totala	Greutate capac	Ambalare	Cod produs
mm	mm	mm	mm	mm	kg	kg		
785	600	100	643	58	46.0	26.0	10	CBTE60DU

Materiale si protectii

- Rama si capacul in fonta ductila EN GJS 400-15: protectie pe baza de apa de culoare neagra
- Garnitura antizgomot din PE

Domeniu de aplicare:

- Grupa 2 (clasa B125) in conformitate cu standardul EN124-2: zone pietonale si zone necarosabile comparabile, parcuri.

TEK MUNICIPAL CASTINGS		08/23/2019
		VB12REURGT200

Caracteristici principale:

- Blocare automata cu bara elastica din fonta ductila
- Balama, deschidere la 110°
- Rama optimizata pentru o mai buna pozare
- Capace interschimbabile intre versiunea ventilat si neventilat
- Optional sistem anti-intruziune ¼ (sfert de tura)
- Optional pana antifurt pentru capac TEK