


13.1.2 Double configuration

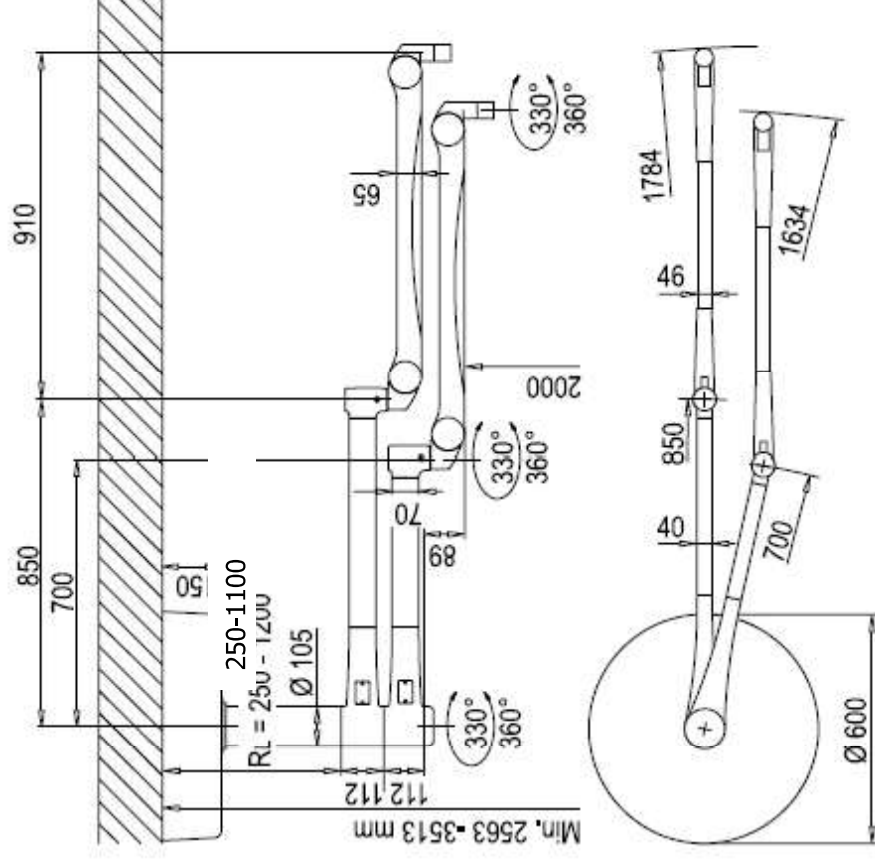

EXTENSION ARM 700 mm, 850 mm - SPRING ARM 910 mm	
LOAD CAPACITY EXTENSION ARM 700 mm EXTENSION ARM 850 mm	21 kg 19 kg
SUPPLIED SPRING	1-2.5 kg, 2.5-4.5 kg, 4.5-7.5 kg, 7.5-9 kg, 9-11 kg, 11-13 kg, 13-15 kg, 15-18 kg, 18- 21 kg
MOVEMENT RANGE	
HORIZONTAL SPRING ARM VERTICAL SPRING ARM	330°/360° 45° UPWARDS/50° DOWNWARDS
VERTICAL SPAN ADJUSTMENTS	1180 mm 330°/360°
LOAD DATA VERTICAL WEIGHT FORCE BENDING MOMENT	610 N 850 Nm
NET WEIGHT CEILING PLATE INTERFACE PLATE CENTRAL AXIS (TWO PARTS) POLE (PER METRE) EXTENSION ARM 700 mm EXTENSION ARM 850 mm SPRING ARM 910 mm	40 kg 30 kg 7.0 kg 10.0 kg/metre 4.6 kg 5.1 kg 6.2 kg
CEILING COVER DIAMETER	600 mm
COLOUR	RAL 9002
POWER SUPPLY	100-240 VAC ±10% - 50/60 Hz