



MARK VIEW

**ANKARA
SERAMİK**
IPU 10/630-7,5 UHL1
MADE IN TURKEY

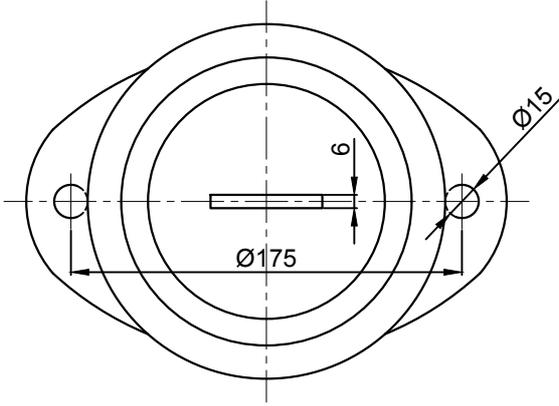

'X' Bakışı
View 'X'

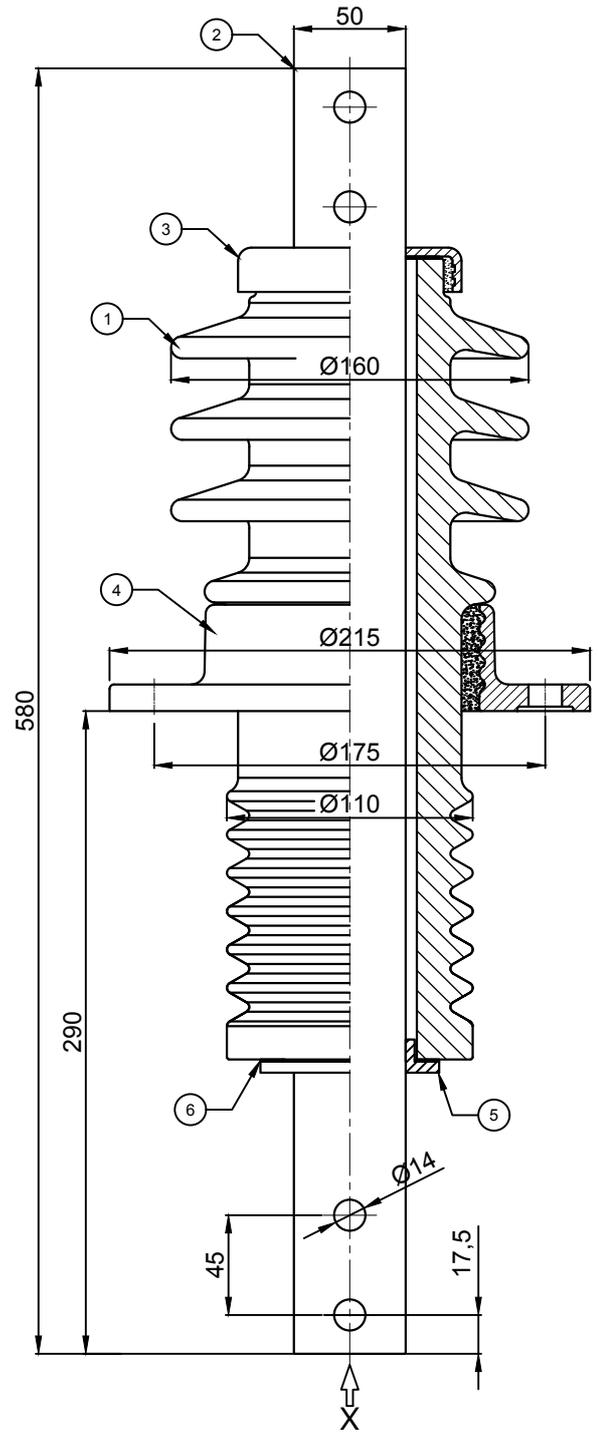

ELEKTRİKSEL PERFORMANS ELECTRICAL PERFORMANCE	
Anma Gerilimi (Rated Voltage)	10 kV
Anma Akımı (Rated Current)	630 A

MEKANİKSEL PERFORMANS MECHANICAL PERFORMANCE (IEC 60383-1)	
Eğilmede Minimum Kırılma Yüğü (Minimum Bending Failing Load)	7,5 kN

DIELEKTRİK PARÇALAR (DIELECTRIC PARTS)	
Malzeme (Material) IEC 60672-3	Porselen (Porcelain)
Kaçak Mesafesi (Creepage Distance)	(Z-Z) min. 300 mm
Sır Rengi (Glaze Color)	Kahverengi (Brown)
Tolerans (General Tolerance)	DIN 40680
Ağırlık (Weight)	~7,5 kg

Poz. (Pos.)	Ürün No (Product No)	Bileşen Parçaları (Components Parts)	Adet (Pcs.)	Malzeme (Material)
6	441000-917	Üst-Alt Conta (Top-Bottom Gasket)	2	Mantar Conta (Cork Gasket)
5	441000-916	Alt Bağlantı Metali (Bottom Metal)	1	Alüminyum (Aluminium)
4	441000-915	Orta Bağlantı Metali (Middle Metal)	1	Dökme Demir (Cast Iron) GGG 40 & C 1050 Sıcak Daldırma Galvaniz (Hot Dip Galvanized) 90-100 Mic.)
3	441000-914	Üst Bağlantı Metali (Top Metal)	1	Alüminyum (Aluminium)
2	441000-918	Orta Sac (Middle Sheet Metal)	1	Alüminyum (Aluminium)
1	9-441010-000	Seramik Gövde (Ceramic Body)	1	Porselen (Porcelain)

ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED

THIS DRAWING IS NOT TO BE COPIED OR THE INFORMATION HEREIN DIVULGED TO ANY THIRD PARTY OR USED FOR THE MAKING OF APPARATUS WITHOUT THE WRITTEN PERMISSION OF ANKARA SERAMİK A.Ş.

**ANKARA
SERAMİK**
www.ankaseramik.com

PORSELEN SAN. ve TİC. A.Ş.
PORCELAIN INDUSTRY OF TURKEY
1.ORGANİZE SAN.BÖL.OSMANLI CAD.
NO:15 SİNCAN/ANKARA/TURKEY
TEL: (0312) 267 37 77 FAX: (0312) 267 27 77
info@ankaseramik.com

Yayın Tarihi
(Release Date)
Onay
(Approved By)
Kontrol
(Checked)
Çizen
(Drawn By)

15.03.2022

İ.ŞAHİN

Ö.ÇİTAK

E.TONBULOĞLU

Malzeme
(Material)

Std. No.

Rev. No

Ürün no / Müşteri
(Product No / Customer)

9-441010-000

Porselen (Porcelain)

Adet
(Piece)

Ölçek
(Scale)

**IPU 10/630-7,5 UHL 1
GEÇİŞ İZOLATÖRÜ**
(Feedthrough Insulator)