



# 山东海迪科医用制品有限公司 SHANDONG HAIDIKE MEDICAL PRODUCTS CO.,LTD.

Add: Plant No. 1, Science and Technology Enterprise Incubator Park, Shan County, Heze City, Shandong Province, China

Tel: +86-530-4660062 Fax: +86-530-4660055 Mobile: +86-13105409308 E-mail: info@suturescn.com Web: www.suturescn.com



### SHANDONG HAIDIKE MEDICAL PRODUCTS CO.,LTD.

山东海迪科医用制品有限公司

# RTTED

### INTRODUCTION

# C € FD/A ISO NMPA FSC



- . Absorbable surgical sutures approved by CE certificate
- . NO.1 catgut suture plant in the world
- Lifting Threads for Beauty, Cosmetic
   Orthopedic casting tapes & splints
- Medical protection products Electric Wheelchair & Manual Wheelchair
   Pet Food, Vet Suture





MEDICAL DEVICE PRODUCTION LICENSE.



THE PERSON NAMED IN













RT-ED

## PDO POLYDIOXANONE

### Properties:

Structure: Monofilament Colour: Violet, Undyed

Chemical composition: Poly (p-dioxanone) Sizes: USP 7/0 - USP 2

Type of absorption: Hydrolysis Sterilization: Ethylene Oxide Absorption: 180 - 210 days



### Advantages:

- · High initial tensile strength
- · Prolonged wound support
- · Minimal tissue reaction
- . Lower incidence of infection and trauma due to smooth surface

45,42000

Sarar Sarar

RT CED" POLYGLYCOLIC ACE

= 2

RT CED ED\*

SURGICAL SUTURE

## PGA POLYGLYCOLIC ACID

#### Properties:

Structure: Multifilament, Braided

Colour: Violet, Undyed

Chemical composition: Polyglycolic acid

Coating: Polycaprolactone + Calcium Stearate

Sizes: USP 8/0 - USP 4 Type of absorption: Hydrolysis Sterilization: Ethylene Oxide Absorption: 60 - 90 days

### Advantages:

- · High initial tensile strength
- · Excellent knotting ability
- · Reliable absorbability
- · Easy to handle
- · Outstanding holding power through the critical wound periode
- · Smooth surface, slides smoothly through the tissue

## PGLA POLYGLACTIN 910

Structure: Multifilament, Braided Colour: Violet, Undyed

Coating: Poly(glycolide-co-l-lactide 30/70) + Calcium Stearate

Sizes: USP 8/0 - USP 2

Type of absorption: Hydrolysis Sterilization: Ethylene Oxide Absorption: 56 - 70 days

### Advantages:

- · High tensile strength
- · Smooth tissue passage
- · Easy knotting and tie down
- · Excellent knot security
- · Reliable absorbability



WWW.HDKSUTURE.COM

### Properties:

Chemical composition: Poly(glycolide-co-l-lactide 90/10)

# PGCL POLIGLECAPRONE 25

### Properties:

Structure: Monofilament Colour: Violet, Undyed

Chemical composition: Poly (glyclolide-co-caprolactone)

Sizes: USP 6/0 - USP 2 Type of absorption: Hydrolysis Sterilization: Ethylene Oxide Absorption: 90 - 120 days

## Advantages:

- · High initial tensile strength
- · Easy handling
- · Smooth passage through tissue
- · Excellent knotting ability





WWW.SUTURESCN.COM

Composition: Purified connective tissue


CHROMIC CATGUT

C Simular

RT (TID) ED®

### Properties:

Structure: Braided Colour: Black, White Composition: Natural silk filaments Coating: Silicon / wax



- · Excellent handling properties

## **POLYPROPYLENE**

### Properties:

Structure: Monofilament Colour: Blue Chemical composition: Polypropylene Sizes: USP 7/0 - USP 3 Sterilization: Ethylene Oxide

- · Easy and secure knotting
- · Minimal acute inflammatory reaction in tissues
- · Excellent and permanent tissue support

#### WWW.SUTURESCN.COM

## SILK

Sizes: USP 8/0 - USP 4



### Advantages:

- · High tensile strength
- · Highly smooth and flexible
- · Good knot security





- · High tensile strength
- · Smooth tissue passage







ALCOHOL:

RT CED ED®





Properties: Colour: Dark brown

Sizes: USP 7/0 - USP 4

Advantages:

· High tensile strength

· Minimal tissue reaction · Uniform absorption

· Excellent handling properties

Type of absorption: Proteolysis

Sterilization: Gamma radiation

Absorption: 90 - 100 days

Composition: Purified connective tissue Sizes: USP 7/0 - USP 4 Type of absorption: Proteolysis

**PLAIN CATGUT** 

Sterilization: Gamma radiation Absorption: 60 - 70 days

### Advantages:

- · High tensile strength
- · Smooth tissue passage
- · Easy knotting and tie down
- · Excellent knot security
- · Reliable absorbability

05



WWW.HDKSUTURE.COM





aline and

RT CO NYLON

Can proper Control

RT CED ED\*

SURGICAL SUTU

### NYLON

### Properties:

Structure: Monofilament Colour: Blue, Black Chemical composition: polyamide 6 - 6.6 Sizes: USP 12/0 - USP 4

Sizes: USP 12/0 - USP 4 Sterilization: Ethylene Oxide



- · High tensile strength
- · Smooth tissue passage
- · Easy and secure knotting
- · Excellent and permanent tissue support

## **POLYESTER**

#### Properties:

Structure: Braided Colour: Green, White Chemical composition: Polyethylene terephthalate Coating: Silicon

Sizes: USP 6/0 - USP 4 Sterilization: Ethylene Oxide

### Advantages:

- · High tensile strength
- Excellent handling properties Minimal tissue reaction Good knot security








#### SUTURE CODES

#### SHANDONG HAIDIKE MEDICAL PRODUCTS CO. LTC

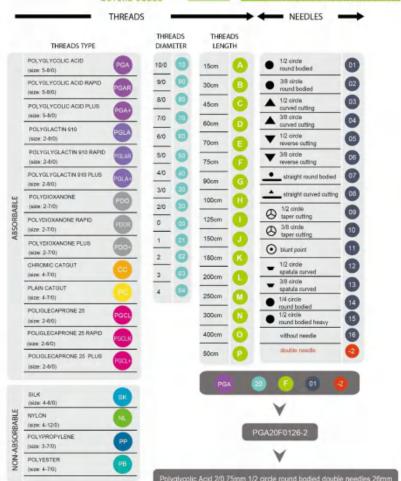

WWW.SUTURESCN.COM

#### BEAUTY LIFTING THREAD SMANDONG WAIDING MEDICAL PRODUCTS COLLED.

## Lifting Threads Needle

Basic type, generally used for linear filling and simple lifting, Beginners can also operate effortlessly.

TYPE L type blunt needle, reduce the damage of blood vessels, bruising and hematoma. The pain was significantly reduced.

Circular head, reducing the damage to the skin tissue. After the injection, the needle can be taken out then correct the position and depth of the needle, which improves the lack of a stitch of the

Double needle is used for eyebrow lifting and other parts requiring strong lifting. U-COG is a special structure line with strong lifting ability. The local lifting effect is almost as good as the little facelift.

## PDO/PCL Lifting Thread



#### Mono

KONK



Parts Face, Body Tightening, Filling, Wrinkles Removing, Whitening

cedie L type Blunt Needle

Nasal columella, Nasal bridge



#### Tornado Screw


Sharp Needle Eye, Neck, Crow's Feet, Cheek Tightening, Filling, Whitening, Wrinkles Removing





### COG Lifting

L/W type Blunt Needle Lifting Eyebraw, Apple Zone, Cheek, Chest Effects Face Lifting, V Face, Chest Lifting







### Multi Threads

Needle L type Blunt Needle

Parts Face, Neck, Eye Bag, Crow's Feet Tightening, Filling, Whitening, Wrinkles Removing



#### Molding COG

Needle W tpye Blunt Needle Face, Neck, Crow's Feet, Eye Bag

Tightening, Filling, Whitening, Wrinkles Removing

### Forehead

Multi Threads / Tornado Screw / Mono Screw

### Crow's feet / Eye bags / Eye Corner's Lifting

Blunt Needle For Eye 30G-25mm

#### Apple Zone

Multi Threads / Tornado Screw / Mono Screw

### Nasolabial folds / Mouth Corner's Lifting

Multi Threads / Tornado Screw / Mono Screw





### Face Lifting

18G-100mm / 19G-100mm

Nose Dorsum / Nose Bridge

Nose Columella 19G-38mm

Cervical Stripe / Neck Lifting

23G-38mm / 18G-100mm



# **Medical Cooling Gel Patch**



# **Hyaluronic Acid Hydrating Mask**







### WWW.HDKSUTURE.COM

# Peptide Repair Lyophilized Powder



## **Skin Care Products**





Mist Cleaning Foam	15000	
Spothing Moisturizing Toner	120ml	
Moisturizing Repairing Lotion	100mm	
Arightening Recovery Essence	40mk	
Multi-effect Nourishing Repairing Cream	50g	

# Hernia Repair Mesh



Promotes liquid circulation and smoothes tissue growth.


### Less micropores

Greatly reduces the possibility of bacteria hiding and is not easy to infect.


### Light weight

Reduce postoperative pain and foreign body sensation.

Hemia Example



After Mesh Repair



WWW.HDKSUTURE.COM


# Disposable Surgical Face Masks





3 Ply Flat type	Ear Loop EN 14683:2019 Type IIR 🚕	
Name	Parameter	
Size	17.5 cm x 9.5 cm	
Material	Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, metal wire with plastic covering nose clip, polyesterinylon spandex blend ear loops	
Product performance: The bacterial filtration efficiency of the mask should be not less than 98%.		
Application	It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc.	
Expiration date	2 years after production	
Storage Storag		





3 Ply Flat type	Ear Loop EN 14683:2019 Type IIR	ARRA
Name	Parameter	
Size	14.5 cm x 9.5 cm	
Material	Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, metal wire with pla covering nose clip, polyesterinylon spandex blend ear loops	astic
Product performance	The bacterial filtration efficiency of the mask should be not less than 98%.	
Application	It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in	
Expiration date	2 years after production	
Storage	Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well- room. Transportation means should be clean and isolated from fire sources.	ventilated

WWW.SUTURESCN.COM

# Disposable Medical Face Mask



3 Ply Flat type	Ear Loop	EN 14683:2019	Type I	
Name	Parameter			
Size	17.5 cm x 9.5 cm			
Material		nwoven fabric, polypropylene melt-blown no inylon spandex blend ear loops	onwoven, metal wire with	h plastic
Product performance:	The bacterial filtration efficier	ncy of the mask should be not less than 95%	i	
Application		ing non-invasive procedures, covering the u vert direct penetration of pathogenic microorg		
Expiration date	2 years after production			
Storage	Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.			



3 Ply Flat type	Ear Loop EN 14683:2019 Type IIR
Name	Parameter
Size	17.5 cm x 9.5 cm
Material	Polypropylene spunbond nonwoven fabric, polypropylene melti-blown nonwoven, metal wire with plastic covering nose clip, polyesterinylon spandex blend ear loops
Product performance:	The bacterial filtration efficiency of the mask should be not less than 98%.
Application	It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc.
Expiration date	2 years after production
Storage	Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.







#### EN 14683:2019 Type I 3 Ply Flat type Ear Loop

Parameter 14.5 cm x 9.5 cm Polypropylene spunbond nonwoven fabric, polypropylene mell-blown nonwoven, metal wire with plastic covering nose clip, polyestermyton spandez bland ear loops. The bacterial filtration efficiency of the mask should be not less than 95%. Material Product performance It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a Application certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.



#### 5 Ply Folding type EN 14683:2019 Type IIR

WWW.SUTURESCN.COM

Acres 1

Name	Parameter
Size	11.5 cm x 15 cm
Material	Polypropylene spunbond norwoven fabric, polypropylene melt-blown norwoven, nose clip, polyesterinylon spandex blend ear loops
Product performance:	The bacterial filtration efficiency of the mask should be not less than 98%.
Application	It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc.
Expiration date	2 years after production
Storage	Store at room temperature, the relative humidity should not exceed 80%, non-corresive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.

WWW.HDKSUTURE.COM

RT DED DISPOSABLE MEDICAL FACE MASK

## **Medical Goggle**



□White □Black □Transparent Model specifications □Large □Medium □Small

Product description It is composed of a protective cover made of polymer material, a foam strip and a fixing device. Non-sterile,

single use.

**Expiration date** 3 years after production

This product should be stored in a Storage dry, ventilated, non-corrosive gas

warehouse.

### 3 Ply Cup type Head Loop EN14683:2019 Type IIR

Parameter Name 13.5 cm x 13.5 cm

Polypropylene spunbond nonwoven fabric, polypropylene melt- blown nonwoven, nose clip, polyesterinylon spandex blend ear loops

The bacterial filtration efficiency of the mask should be not less than 90%. Product performance:

It is worm by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc. Expiration date 2 years after production

Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.





WWW.HDKSUTURE.COM

#### 5 Ply Folding type Head Loop N95-V1 STERILE

Name	Parameter
Size	11.5 cm x 15 cm
Material	Polypropylene spunbond nonwoven fabric, polypropylene melli- blown nonwoven, nose clip, polyesterinylon spandex blend ear loops
Product performance:	The bacterial filtration efficiency of the mask should be not less than 95%.
Application	It is worn by clinical staff during non-invasive procedures, covering the user's mouth, nose, and jaw, providing a certain physical barrier to prevent direct penetration of pathogenic microorganisms, particulate matter, in patients, etc.
Expiration date	11 months after production
Storage	Store at room temperature, the relative humidity should not exceed 80%, non-corrosive gas and well-ventilated room. Transportation means should be clean and isolated from fire sources.

room. Transportation means should be clean and isolated from fire sources.

## **Medical Isolation Mask**





### Model: Ear hook type / Headband type

EN166:2001 EN167:2002



Product description It is composed of a protective cover made of polymer material, a foam strip and a fixing device. Non-sterile, single use.

**Expiration date** 3 years after production

Storage This product should be stored in a dry, ventilated, non-corrosive gas warehouse.

## **Isolation Gown**



### Isolation Gown - TYPE A



Isolation gowns - type A Specifications: 120cm×120cm Material 100% Non-woven fabric Non-woven fabrics are usually used as the main raw materials, which are made by cutting and sewing. Non-sterile, single-use. Product description **Expiration date** 3 years after production Storage This product should be stored in a dry, ventilated, non-corrosive gas warehouse.

## **Isolation Gown**




### **Isolation Gown - TYPE B**



Isolation gowns - type B	Specifications: One-size-fits-all
Material	100% Non-woven fabric
Product description	Non-woven fabrics are usually used as the main raw materials, which are made by cutting and sewing. Non-sterile, single-use.
Expiration date	3 years after production
Storage	This product should be stored in a dry, ventilated, non-corrosive gas warehouse.

WWW.HDKSUTURE.COM

# **Medical Disposable Protective Clothing**

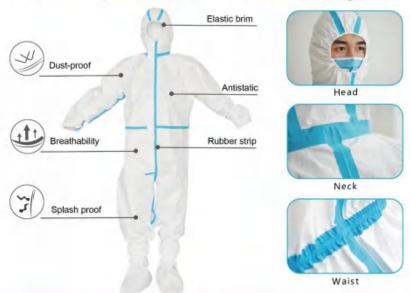

### Executive Standard: GB 19082-2009 EN 14126:2003



Specifications: One-piece Sizes: n 160 n 165 n 170 n 175 n 180 n 185

#### Raw materials of Components:

Items No.	Components	Raw materials
1	Fabrics	PP+PE (Polypropylene + polyethylene breathable membrane) composite material
2	Rubber strip	EVA low temperature glue, polymer basic cloth

Intended use: It is used to provide barrier and protection for the potentially infectious patients' blood, body fluids, secretions, etc. that clinical medical personnel come into contact with at work. It cannot be used to isolate places with strict microbiological index control requirements such as intensive care unit (room).

**Expiration date** 2 years after production

Storage: Store at room temperature, in non-corrosive gas, dry, avoid the sunlight, good ventilation, clean enviro-

# **Surgical Gowns**







Model: aS aM aL aXL aXXL aXXXL aXXXXL Specifications: ::High performance type ::Standard type

Material

For the surgical staff to wear, reduce the source of infection to the patient's surgical wound to prevent postoperative wound infection. Intended use

**Expiration date** 3 years after production

Store in an environment with relative humidity not exceeding 80%, no corrosive gas, cool, Storage dry, well ventilated and clean.

### **Medical Isolation Shoe Cover**



#### size: Long Short Style: Non-woven fabric PVC PP+PE

Product description Made of suitable materials, with sufficient strength and barrier properties. Non sterile.

**Expiration date** 3 years after production

Store in an environment with relative humidity not exceeding 80%, no corrosive gas, cool, Storage

dry, well ventilated and clean.

Long-style / Short-style Medical isolation shoe cover Blue / White FZ/T64005-2011

## **Medical Cap**

Model specifications Round cap. φ25.5cm FZ/T64005-2011

Product description Non-woven fabric is usually used as the main raw material, which is made

by cutting and sewing. Non-sterile, single-use.

□Non-woven fabric □PP+PE Material

Colour Blue

This product should be stored in a dry, Storage ventilated, non-corrosive gas warehouse.

## **Medical Scrubs Uniforms**



### Model: type A: split type; type B: gown type.



Specifications DS OM OL OXL OXXL

Usually made of cotton fiber or non-woven fabric. The medical scrubs uniforms is short-sleeve or long-sleeve style that have the function of blocking dandruff, and do not have liquid barrier properties. It is non-sterile supply and can be reused. It should be sterilized before using **Product Description** 

**Expiration date** 

The product should be stored in a clean warehouse without corrosive gas, well ventilated, cool and dry. Storage

### **Medical Bed Sheet**





### Materials: 70% Polypropylene, 30% Polyethylene non-woven fabric

Product description	It is made by compounding or sewing non-woven fabric and plastic film. Non-sterile, single use.
---------------------	---

**Expiration date** 3 years after production

Storage This product should be stored in a dry, ventilated, non-corrosive gas warehouse.







Medical Protection Products



WWW.HDKSUTURE.COM

## **Disposable Virus Specimen Collection Tube**



### Model: Inactivated and non-inactivated



Product description Disposable virus specimen collection tube is composed of swabs and/or collection cups and tubes containing storage solution. Non-sterile.

**Expiration date** 

The product should be stored in a non-corrosive gas and well-ventilated warehouse at room Storage

### Medical examination gloves



According to the different materials used, it is divided into: polyvinyl chloride, butyronitrile; according to the size, it is divided into: XS, S, M, L, XL.

tion) Usually made of materials such as polyvinyl chloride. Have sufficient strength and barrier properties. Non-sterile supply, single use.

It will be wore by doctor to do checking for the patients or lab testing.

### Medical rubber gloves



odel/Specification XS, S, M, L, XL.

roduct Description. Usually made of materials such as polyvinyl chloride and rubber. Have sufficient strength and barrier properties. Non-sterile supply, single use.

tended use It will be wore by doctor to do checking for the patients or lab testing.

## **Orthopedic Casting Tape**



#### **USE INSTRUCTION**

- . Apply 1~2 layers stockinet over the affected body part;
- · Wear surgical gloves;
- Choose proper size orthopedic casting tape, then open the package;
- Immerse the casting tape in normal temperature(20°C~30°C) water for 5~6 seconds and squeeze 2~3 times. Then remove from the water and squeeze out the excess water. The curing time of orthopedic casting tape is directly related to the temperature of water. The curing time is shorter in high temperature water than in low temperature water. If the water temperature is over 27%, the curing time is too short to increase the difficulty of the operation.
- Wrap the casting tape spirally around the affected body part, overlapping the previous layer by one-half or two-thirds the width of the tape. The tension is moderate. If it is too loose, it will weaken the adhesion of the orthopedic casting tape. If it is too tight, it will affect the blood circulation.
- The intensity of the casting tape is related to the number of overlapped layers. Overlap 3~4 layers for the non-weight bearing parts, while overlap 5~6 layers for the weight bearing parts. If more layers are needed, please ensure the adhesivity between the layers.
- To increase the adhesion between layers, the casting tape will be shaped after wrapped. The operating time should be in 3~5 minutes. The adhesion and shaping effect cannot reach the best if the operating time is longer or the immersed time is too long. The patients do not allow to move freely in 10 minutes before the orthopedic casting tape are completely hardened.
- . The electric plaster saw is needed if the affected parts need to open a window or remove the orthopedic casting tape.

Orthopedic Casting Tape				
Product Description	Sizes	Specification(W×L)	Packaging	Operating Part
Fiberglass Orthopedic Casting Tape	RT002	5.0cm < 360cm	10baga/box 12boxes/ch	Wrists/Childrens
Fiberglass Orthopedic Casting Tape	RT003	7.5am × 360am	10baga/box 12boxes/stn	Arrs
Piberglass Orthopedic Casting Tape	RT004	10.0em × 360em	10baga/box 12boxea/ctn	Arms / Legs
Fiberglass Orthopedic Casting Tape	RT006	12.5cm × 360cm	10bags/box 9boxes/oth	Legs
Fiberglass Orthopedic Casting Tape	RT006	15.0cm = 360cm	10bage/box 9boxesictn	Legs

## **Polymer Splint**



Wrist Fixation Recommended sizes: 312 (7.5cmX30cm) 415 (10cmX40cm)



Thumb Fixation Recommended sizes: 312 (7.5cmX30cm) 415 (10cmX40cm)



The Fourth and Fifth Finger Exation Recommended sizes: 312 (7.5cmX30cm) 415 (10cmX40cm)



Recommended sizes: 312 (7.5cmX30cm) 415 (10cm)(40cm)



Forearm Fixation Recommended sizes: 335 (7.5cmX90cm) 430 (10cmX75cm)



Horseshoe Fixation Recommended sizes: 335 (7.5cmX90cm) 430 (10cm)(75cm)



Ankle Fixation Recommended sizes: 430 (10cmX75cm) 530 (12.5cmX75cm)



Recommended sizes: 335 (7.5cm)(90cm) 545 (12.5cm)(115cm)

	Polymer splint				
Product Description	Sizes Specification(WxL)	Packaging	Operating part		
Medical Polymer Splint	312 7.50en)/30en	20tagstor 6toxes/str	vrists/Childrens		
Medical Polymer Spirst	335 7.50ereXS0ere	10baga/box Sboxesich	armslegs		
Medical Polymer Splint	415 10 DaniX4Dani	1Stags/box Stockes/oth	amslegs		
Medical Polymer Splint	430 10 Don/J75om	10taga/box 6toxes/stn	legs		
Medical Polymer Splint	530 12.5emX75em	10bagulbos 6baxes/ctn	legs		
Medical Polymer Splint	545 12.5cmX115cm	Stags/box (bbcses/ctn	legs		
Medical Polymer Splint	830 15-DemX75em	10begs/box 6beves/cin	legs		
Medical Polymer Spiret	845 15.0cmX115cm	Shagsibox (Showesictin	legs		

WWW.HDKSUTURE.COM WWW.SUTURESCN.COM







Umbilical Scissors







Hemostatic Forceps



Edison Forceps

Dissecting Forceps

**Dressing Forceps** 

Surgical Blade Scalpel 3# Scalpel 4# Scalpel 7# **Surgery Suction Pipe** Bone Hook Skin Retractor

WWW.SUTURESCN.COM


SURGICAL INSTRUMENT SHAROONS HARDES MEDICAL PRODUCTS CO. LTD.

WWW.HDKSUTURE.COM

29

## **Electric Wheelchair**







Front wheel size: 10 inches Rear wheel size: 16 inches

Dimensions: 1180×630×1360mm

Safe load: 100kg

Frame material: Carbon steel

Net weight: 47kg (actually prevail) Maximum speed: 6km/h

Theoretical travel: 15km

Motor (motor): DC24V250W\*2pcs Gradeability (gradient): 6 degrees









Front wheel size: 8 inches Rear wheel size: 12 inches Dimensions: 990×590×950mm

Safe load: 100kg

Frame material: Aluminum alloy Gradeability (gradient): 6 degrees Battery: 12AH/20AH lithium battery

Net weight: 21.5kg (actually prevail) Maximum speed: 6km/h

Theoretical travel: 15km

Motor (motor): DC24V250W\*2pcs

Folding size: 765×590×350mm

## Manual Wheelchair









Front wheel size: 7 inches Rear wheel size: 24 inches Dimensions: 950×680×900mm Safe load: 100kg Frame material: Aluminum alloy Net weight: 18kg (actually prevail) Armrest: blow molding/leather Seat width: 460mm Seat height: 520mm









Front wheel size: 6 inches Rear wheel size: 8 inches Dimensions: 1000×500×910mm Safe load: 100kg Frame material: Aluminum alloy Folding size: 220×500×700mm

Net weight: 7.2kg (actually prevail) Armrest: blow molding/leather Seat width: 340mm Seat height: 490mm Backrest height: 410mm

WWW.HDKSUTURE.COM WWW.SUTURESCN.COM

## Seniors Shopping Cart A good helper for parents in life



Tie-rod brake design



Comfortable seat



Wear-resistant reinforced brake rear wheel



## **New Generation Multi-claw Crutches**



#### Smooth all the way

- Anti-stumbling design Sleady walk without hindrance
   The inside and outside width design is balanced and stable.



#### Feel comfortable

 High wear-resistant handral
 Surface cracked anti-skid treatment, anti-skid and wear resistant Ergonomic design, Fits to the hand without getting fired from holding for a long time.



### Firmer and stronger

- •1.2mm wall thickness Thicken reinforcement •Lightweight and load-bearing



### Firm and convenient

Annular clavicle clamp
 Fixed main pole Three simple steps.



### **Medical Grade Crutches**



### PE environmentally friendly foam material arm rest

Thick PE foam material, high resilience, non-sip, soft and comfortable, strong abrasion resistance, not lined after long-term use.



### Leg height adjustment in 9 positions

The height of 9 levels is adjustable to meet the needs of people of different heights. Strengthen the aluminum alloy to provide super good support.



# Stable and non-slip height adjustable

Grip three-position adjustment The grip has three gears adjustment, the adjustment part is locked firmly and stably, and it is convenient to use and feel comfortable and soft



### Non-slip durable rubber pad

The rubber pad is made of rubber, which is thicker, stable and non-slip, and the built-in metal gasket is wear-resistant and



## **Nursing Bed**

### Bent leg angle: -45-25° Back angle: 0-80°

Rollover angle: 0-55°

### Toilet hole size: 280×215mm


Product Size: 2100×900×550mm

#### Bed size: 1970×900mm

Bed material: Thickened steel pipe

#### For people: Elderly, paralyzed patients, etc.

Product acessories: Wash basin, infusion stand, mattress, dining table, guardrail, castor, bedpan

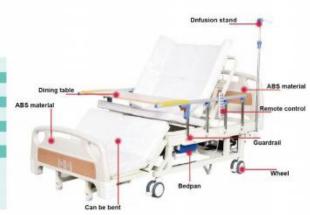

WWW.HDKSUTURE.COM

# RILK Symbled RICHED RI cin ED

## **Cassette Sutures**

Length	25m	50m	75m	100m
Absorbable	Chromic catgut, Plain catgut PGA, PGLA, PDO			
Non-absorbable	Silk, Nylon , Palyester, Polypropylene			



**Suture Materials** 



### Self-adhesive Elastic Bandage

Standard	Features
5.0cm×450cm	Self-adhesive
7.5cm×450cm	High elasticity
10cm×450cm	Waterproof
15cm×450cm	Easy to tear

## Milkshake















# **Pet Staple Food**













# **Acupoint Pressure Stimulation Patch**





Specification model; φ7cm×1 paste×40 paste, paste core φ3cm

Product description: This product is composed of spheres and medical tape. It is attached to acupuncture points of the human body and only exerts pressure stimulation by external force.

Intended use: It is used to stick to acupuncture points of the human body for external stimulation. Non-invasive.

# **Nasal Irrigator**





Press again to stop the water















