


Runtime: SRV2KI-E

APC Easy UPS On-Line, 2000VA/1800W, Tower, 230V, 4x IEC C13 outlets, Intelligent Card Slot, LCD
Easy UPS On-Line

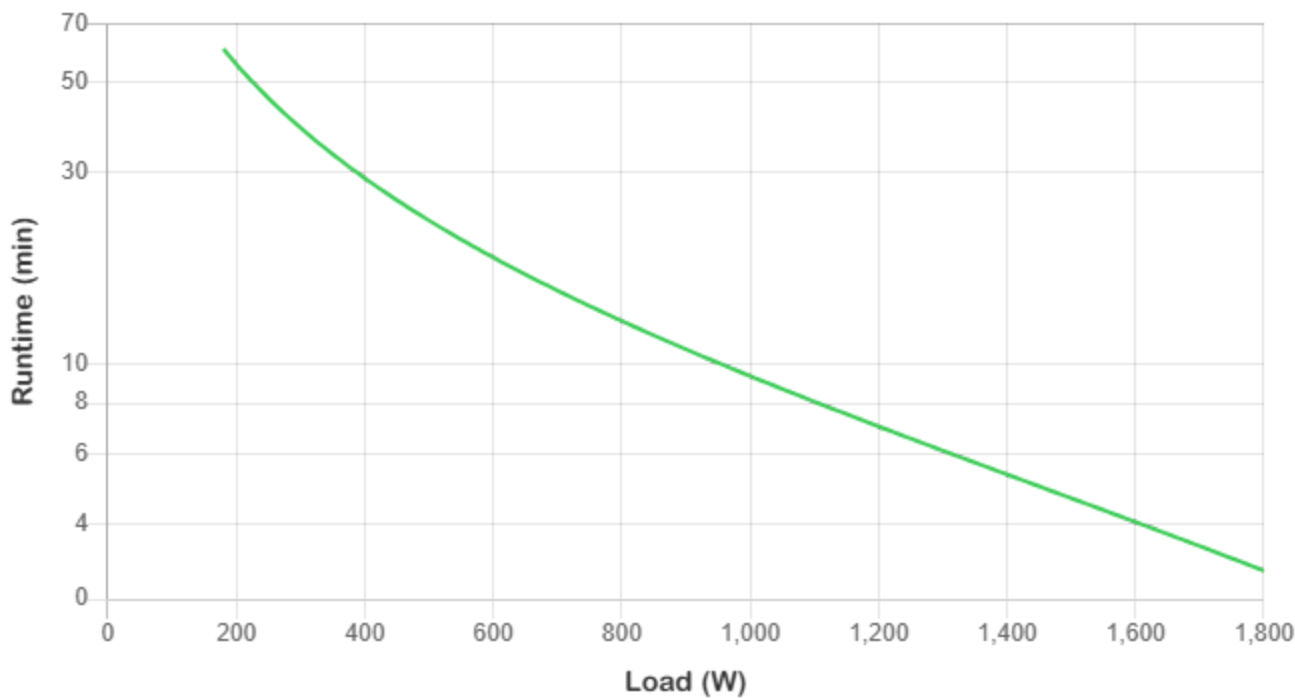

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	180 W	200 W	400 W	600 W	800 W	1,000 W	1,200 W	1,400 W	1,600 W	1,800 W
SRV2KI-E	1 h	55 min	28 min 55 sec	18 min 24 sec	12 min 48 sec	9 min 20 sec	7 min	5 min 19 sec	4 min 3 sec	3 min 4 sec

<https://www.se.com/uk/en/products-runtime-graph/SRV2KI-E/apc-easy-ups-online-2000va-1800w-tower-230v-4x-iec-c13-outlets-intelligent-card-slot-lcd/>