



House of Ortho Tools

ORTHOPEDIC SURGICAL INSTRUMENT CATALOGUE



www.hardikinternational.com

SAGC.14 6.5mm Cannulated Screw and instrument Set



◦ 656.200 | Parallel Drill Guide 2.0mm



◦ 657.045 | Drill Bit Cannulated 4.5mm



◦ 658.065 | Tap Cannulated for 6.5mm Screws



◦ 659.035 | Screw Driver Cannulated 3.5mm Tip



◦ 670.200 | Direct Measuring Device for 2.0mm Guide Wire



◦ 671.180 | Guide Wire 1.8mm x 225mm


SAGC.15 7.0mm Cannulated Screw and instrument Set



◦ AGC.15 Graphic Case for 7.0mm Cannulated Screw and instrument



- **733.050** | LCP Drill Sleeve 5.0mm, For Drill Bits 4.3mm
- **733.065** | LCP Drill Sleeve 6.5mm, For Drill Bits 4.5mm

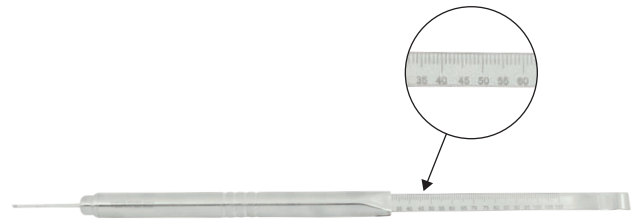

- **609.003** | Depth Gauge for 4.5mm to 6.5mm Screws Length 100mm



- **610.002** | Screw Forceps Self-Holding



- **612A.035** | Screw Driver for Holding Sleeve 3.5mm Tip



- **735.08** | Torque Limit Adapter 4.0 Nm



- **614.035** | Shaft for Hexagonal Screw Driver 3.5mm Tip for 5.0/6.5mm screws
- **614.T25** | Shaft for Star Screw Driver T25 Tip for 5.0/6.5mm screws



- **616.007** | Bending Pliers With Rolls



- **617.001** | Sharp Hook

This Box is for Implants



- AGC.69B Graphic Case for Locking Distal Tibia Plate 3.5mm - B

SAGC.70 Small Fragment Locking Instrument Basic Set



- AGC.70 Graphic Case for Small Fragment Locking Instrument Basic



- 601.005 | Drill Bits 1.8mm x 125mm For Quick Coupling T Handle
- 601.021 | Drill Bits 2.3mm x 130mm For Quick Coupling T Handle
- 601.023 | Drill Bits 2.5mm x 165mm For Quick Coupling T Handle
- 601.024 | Drill Bits 2.7mm x 165mm For Quick Coupling T Handle
- 601.031 | Drill Bits 2.0mm x 145mm For Quick Coupling T Handle
- 601.019 | Drill Bits 2.8mm x 165mm For Quick Coupling T Handle



- 603.001 | Quick Coupling T Handle



- 603.027 | Tap 2.7mm for Quick Coupling T Handle
- 603.035 | Tap 3.5mm Cortex Screw 20TPI For Quick Coupling
- 603.040 | Tap 4.0mm Cancellous Screw For Quick Coupling



- 734.024 | Tap 2.4mm Locking Screw For Quick Coupling
- 734.027 | Tap 2.7mm Locking Screw For Quick Coupling
- 734.035 | Tap 3.5mm Locking Screw For Quick Coupling



- **606.035** | Counter Sink For 3.5mm



- **660.010** | Triple Drill Guide 2.0mm with 3hole Opposite Side 1hole



- **605A.024** | Universal Drill And Tap Sleeve 2.4/1.8mm
- **605A.027** | Universal Drill And Tap Sleeve 2.7/2.0mm
- **605A.035** | Universal Drill And Tap Sleeve 3.5/2.5mm



- **607.035** | DCP Drill Sleeve 3.5mm for use 2.5mm Drill



- **733.027** | LCP Drill Sleeve 2.7mm, For Drill Bits 2.3mm
- **733.035** | LCP Drill Sleeve 3.5mm, For Drill Bits 2.8mm



- **733.020** | LCP Drill Sleeve For variable angle plate 2.4mm, For Drill Bits 1.8mm



- **609.004** | Depth Gauge For 2.4mm To 2.7mm Screw Length 60mm
- **609.002** | Depth Gauge For 3.5mm To 4.0mm Screw Length 80mm



- **610.002** | Screw Forceps Self Holding



- **612A.025** | Screw Driver for Holding Sleeve 2.5mm Tip



- **613A.025** | Holding Sleeve for Locking screws 3.5/4.0mm
- **613B.025** | Holding Sleeve for Non Locking screws 3.5/4.0mm



- **612.011** | Quick Coupling Stright Handle



- **735.06** | Torque Limit Adapter 0.8 Nm
- **735.07** | Torque Limit Adapter 1.5 Nm



- **614.020** | Shaft for Hexagonal Screw Driver 2.0mm Tip for 2.4/2.7mm screws
- **614.025** | Shaft for Hexagonal Screw Driver 2.5mm Tip for 3.5/4.0mm screws



- **614.T08** | Shaft for Star Screw Driver T08 Tip for 2.4/2.7mm screws
- **614.T15** | Shaft for Star Screw Driver T15 Tip for 3.5/4.0mm screws



- **617.001** | Sharp Hook



- **613C.027** | Holding Sleeve for Locking screws 2.4/2.7mm
- **613D.027** | Holding Sleeve for Non Locking screws 2.7mm



- **733.021** | Outer Sleeve 6.0/5.0 for Plate
- **733.022** | Drill Sleeve 2.8mm
- **733.023** | Sleeve for K Wire 1.6mm



- **609.008** | Open Measuring Device



• AGC.71 Graphic Case for Large Fragment Locking Instrument Basic



- **601.012** | Drill Bits 3.2mm x 195mm for Quick Coupling T Handle
- **601.013** | Drill Bits 3.5mm x 195mm for Quick Coupling T Handle
- **601.020** | Drill Bits 4.3mm x 225mm for Quick Coupling T Handle
- **601.028** | Drill Bits 4.5mm x 225mm for Quick Coupling T Handle



- **603.001** | Quick Coupling T Handle



- **612.011** | Quick Coupling Stright Handle



- **603.045** | Tap 4.5mm Cortex Screw For Quick Coupling
- **603.065** | Tap 6.5mm Cancellous Screw For Quick Coupling



- **734.050** | Tap 5.0mm Locking Screw For Quick Coupling



- **606.045** | Counter Sink for 4.5mm



- **605A.045** | Universal Drill And Tap Sleeve 4.5/3.2mm
- **605.065** | Drill And Tap Sleeve 6.5/3.2mm



- **607.045** | DCP Drill Sleeve 4.5mm for use 3.2mm Drill



- **733.050** | LCP Drill Sleeve 5.0mm, For Drill Bits 4.3mm
- **733.065** | LCP Drill Sleeve 6.5mm, For Drill Bits 4.5mm



- **609.003** | Depth Gauge for 4.5mm to 6.5mm Screws Length 100mm



- **610.002** | Screw Forceps Self-Holding



- **612A.035** | Screw Driver for Holding Sleeve 3.5mm Tip



- **735.08** | Torque Limit Adapter 4.0 Nm



- **614.T25** | Shaft for Star Screw Driver T25 Tip for 5.0/6.5mm screws
- **614.035** | Shaft for Hexagonal Screw Driver 3.5mm Tip for 5.0/6.5mm screws

SAGC.71 Large Fragment Locking Instrument Basic Set



- 617.001 | Sharp Hook



- 738.050 | LCP Plate Holder 4.5mm Length 120mm



- 613A.035 | Holding Sleeve for Locking screws 5.0mm
- 613B.035 | Holding Sleeve for Non Locking screws 4.5mm

SAGC.72 Small Fragment Screw Set

This Box is for Implants



- AGC.72 Graphic Case for Small Fragment Screw

SAGC.73 Large Fragment Screw Set

This Box is for Implants



- AGC.73 Graphic Case for Large Fragment Screw



House of Ortho Tools

Hardik International Pvt. Ltd.

Plot No. G-2041/42/A, Kishan Gate, Lodhika G.I.D.C.,
Kalawad Road, Metoda, RAJKOT-360 021, (INDIA).

info@hardikinternational.com

www.hardikinternational.com

☎ : +91 97370 47470/1/2/4 | 📞 : hardikinternational

Follow Us : [!\[\]\(de95854c7ee024cfadc48187bbb781b2_img.jpg\)](#) [!\[\]\(cef08d8c15d8a8acd5e25ab0d65432c3_img.jpg\)](#) [!\[\]\(c244836fd67166dc60ebf5279a0f8377_img.jpg\)](#) [!\[\]\(c9651b690bdf1dda88278b8b3445c7b1_img.jpg\)](#) [!\[\]\(3edfc2ea96443450a4381cfaba839e65_img.jpg\)](#)