



27005AA

HOPKINS® Straight Forward Telescope 0°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: green




27005FA

HOPKINS® Telescope 12°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: black




27005BA

HOPKINS® Forward-Oblique Telescope 30°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red



27005CA

HOPKINS® Lateral Telescope 70°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: yellow



27005EA

HOPKINS® Retrospective Telescope 120°, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: white

Working Element, bipolar


for two-stem electrodes with stabilizers

For use with HOPKINS® Forward-Oblique Telescopes
27005BA, 27005BIA, 27005FA, 27005FIA and AUTOCON® III 400 SCB



Cutting by means of a spring. Movable thumb ring

In rest position the electrode is inside the sheath.

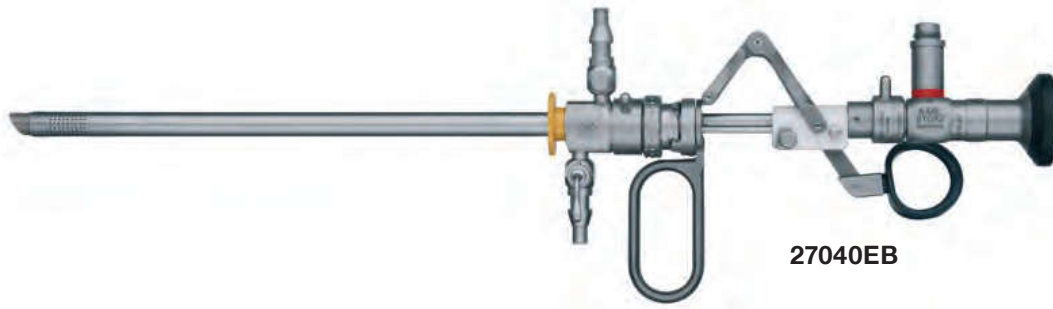

27040EB

Working Element

39040RA

Cleaning Adaptor, for use with working element, bipolar

Fiber Optic Light Cables

for Cold Light Fountains



Fiber Optic Light Cable with Straight Connector

495 NE	Fiber Optic Light Cable , diameter 4.8 mm, length 300 cm
495 NCS	Fiber Optic Light Cable , extremely heat-resistant, diameter 4.8 mm, length 250 cm
NEW 495 NCSC	Fiber Optic Light Cable , extremely heat-resistant, with safety locking device, diameter 4.8 mm, length 250 cm
495 NB	Fiber Optic Light Cable , diameter 4.8 mm, length 180 cm
495 ND	Fiber Optic Light Cable , diameter 3.5 mm, length 300 cm
495 NA	Fiber Optic Light Cable , diameter 3.5 mm, length 230 cm
NEW 495 NAC	Fiber Optic Light Cable , with safety locking device, diameter 3.5 mm, length 230 cm
495 NL	Fiber Optic Light Cable , diameter 3.5 mm, length 180 cm
495 NTA	Fiber Optic Light Cable , diameter 2.5 mm, length 230 cm
495 NT	Fiber Optic Light Cable , diameter 2.5 mm, length 180 cm
NEW 495 TIP	Fiber Optic Light Cable , highly heat resistant, diameter 4.8 mm, length 300 cm, optimized for 3D TIPCAM®1 and TIPCAM®



Fiber Optic Light Cable with 90° Deflection to the Light Source

495 NWL	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 300 cm
495 NWM	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 230 cm
495 NW	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 3.5 mm, length 180 cm
495 NTX	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 2.5 mm, length 230 cm
495 NTW	Fiber Optic Light Cable , with 90° deflection to the cold light fountain on the fountain side, diameter 2.5 mm, length 180 cm



495 NVC



495 NV/NVL/NVB

Fiber Optic Light Cable with 90° Deflection to the Instrument

NEW 495 NVC	Fiber Optic Light Cable , with 90° deflection to the instrument, very narrow radius of curvature, diameter 4.8 mm, length 300 cm
495 NVB	Fiber Optic Light Cable , with 90° deflection to the instrument, diameter 4.8 mm, length 300 cm
495 NVL	Fiber Optic Light Cable , with 90° deflection to the instrument, diameter 3.5 mm, length 300 cm
495 NV	Fiber Optic Light Cable , with 90° deflection to the instrument, diameter 3.5 mm, length 230 cm




Light Adaptor, angled 90°

495 EW	Light Adaptor , angled 90°, diameter 4.8 mm, free rotatable, to connect with standard telescopes
--------	---


Adaptor for connecting KARL STORZ fiber optic light cables with endoscopes and light sources from other manufacturers, see page TP 132

Standard Instruments for Enucleation

HOPKINS® Telescopes



- 27005 BA **HOPKINS® Forward-Oblique Telescope 30°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red



- 27005 FA **HOPKINS® Telescope 12°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: black

Resectoscope Sheaths



- 27050 SCK **Resectoscope Sheath**, quick-release lock, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow

- 27050 SLK **Resectoscope Sheath**, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow

Obturator




- 27040 OC **Standard Obturator**, for 24/26 Fr. sheaths


- 27050 BK SCHMIEDT **Visual Obturator**, for 24/26 Fr. sheaths, 27040 BK/BO/SD/SL, 27240 BO, 27241 BK/BO, 27042 B, 27242 BZ, 27050 SL

Standard Instruments for Enucleation

HOPKINS® Telescopes



- 27005BA **HOPKINS® Forward-Oblique Telescope 30°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red



- 27005FA **HOPKINS® Telescope 12°**, enlarged view, diameter 4 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: black

Resectoscope Sheaths



- 27050SCK **Resectoscope Sheath**, quick-release lock, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow
- 27050SLK **Resectoscope Sheath**, including connecting tube for in- and outflow, 26 Fr., oblique beak, rotating inner sheath with ceramic insulation, color code: yellow

Obturator



- 27040OC** **Standard Obturator**, for 24/26 Fr. sheaths

- 27050BK SCHMIEDT **Visual Obturator**, for 24/26 Fr. sheaths, 27040BK/BO/SD/SL, 27240BO, 27241BK/BO, 27042B, 27242BZ, 27050SL

High Frequency Surgery Units



UH 400

AUTOCON® III 400 High-End, with KARL STORZ-SCB control NEO, power supply 220-240 VAC, 50/60 Hz, including mains cord

UH 400U

AUTOCON® III 400 High-End, with KARL STORZ-SCB control NEO, power supply 100-127 VAC, 50/60 Hz, including mains cord



UH 801

Bipolar High Frequency Cord, length 400 cm, for KARL STORZ AUTOCON® III 400 SCB, for use with KARL STORZ bipolar resectoscopes



UF 902

Two-Pedal Footswitch, with button for switchover function, for use with HF generators

Bipolar Electrodes

24/26 Fr. Electrodes, for use with HOPKINS® Telescopes 27005BA/FA	Size and Color Code	Electrodes – reusable , package of 6	Electrodes – for single use , package of 10 
Cutting Loop for TUR-P			
	diameter 0.35 mm color code: yellow	27040GP1	011160-10*
Cutting Loop for TUR-B			
	diameter 0.30 mm color code: yellow/orange	27040GP130	011165-10*
	diameter 0.30 mm color code: yellow/orange	27040JB130	011167-10*
	diameter 0.30 mm color code: yellow/orange	27040JBE130	011166-10*
Vaporization Electrode HALF MOON®			
	diameter 0.35 mm color code: yellow	<u>27040NB</u>	011156-10*
Enucleation Electrode			
	diameter 0.35 mm color code: yellow	27040VE	011169-10*



Further information on the KARL STORZ product portfolio is available in the Urology catalog.