




SESPB4

Heat-shrinkable termination

for low voltage 4-core mass-impregnated paper cables type (A)K(n)FtA

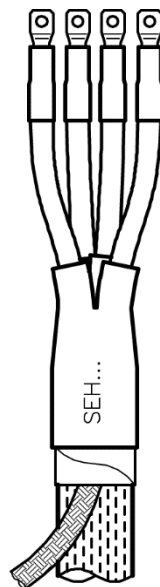

Application

- Indoor
- Outdoor

Voltage level

- $U/U_0 (U_m)$ 0,6/1 (1,2) kV

Scope of delivery

- Sealing tubes
- Core insulating tubes
- Spreader cap
- Earthing tape with lug
- Pressure spring
- Assembly materials
- Working instruction

Cable lugs for main cores must be ordered separately

Storage conditions/Shelf life

- Unlimited shelf life

Type		L [mm]	Nominal cross section per conductor [mm ²]
SESPB4	16-70/500	500	16-70
	70-150/500	500	70-150
	120-240/500	500	120-240

L – length of the insulating tubes

Other lengths available on request.