



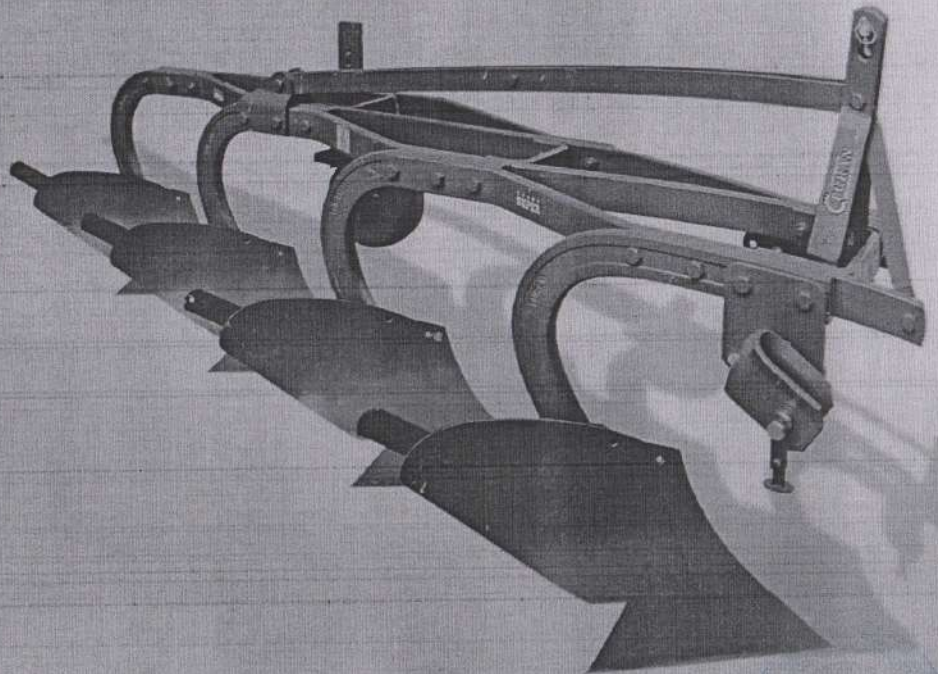


CARACTERISTICI TEHNICE
TECHNICAL SPECIFICATION

	INCHES	 cm.	 cm.	 cm.	 cm.	 kg	 hp
2	8-10	40-50	15-25	70-85	70-85	205	30-70
2	11-14	55-70	20-35	70-85	70-85	243	40-80
2	15-20	75-100	25-50	70-85	70-85	275	40-100
3	8-10	60-75	15-25	70-85	70-85	285	50-90
3	11-14	82,5-105	20-35	70-85	70-85	354	60-100
3	15-20	120-150	25-50	70-85	70-85	405	60-120
4	8-10	80-100	15-25	70-85	70-85	375	60-110
4	11-14	110-140	20-35	70-85	70-85	470	70-110
4	15-20	150-200	25-50	70-85	70-85	540	70-130
5	8-10	100-125	15-25	70-85	70-85	456	80-130
5	11-14	137,5-175	20-35	70-85	70-85	573	90-120
5	15-20	187,5-250	25-50	70-85	70-85	657	90-150
6	8-10	120-150	15-25	70-85	70-85	540	100-150
6	11-14	165-210	20-35	70-85	70-85	685	120-170
6	15-20	225-300	25-50	70-85	70-85	795	130-190

PIESE DE SCHIMB 
OPTIONAL PARTS

ESKİŞEHİR
TUBAN
TRAKTOR MAKİNALARI SANAYİ VE TİC. A.Ş.



PLUG TAIETOR CU URECHI ROTATIVE ŞI
REGLAJ DIN ŞURUB

MOULDBOARD (FIXED) SUSPENDING
ROOF PLOUGH

Handwritten signature or mark in blue ink.