

EDC

Endoscope Drying Cabinet

Dry & Store



MAXIMISE INFECTION PREVENTION

BY CONTROLLING THE ENVIRONMENT WHERE ENDOSCOPES ARE STORED


EDC DELIVERS UNRIVALLED PERFORMANCE, RELIABILITY AND EFFICIENCY FOR YOUR FACILITY

- Full compliance with relevant parts of BS EN 16442
- Dual filtered air maintains positive cabinet pressure
- Clear toughened glass doors allow easy scope recognition
- Secure mounting for scope control section and lightguide plug
- Advanced fully Independent Monitoring System (IMS)
- HEPA filtered and dehumidified air delivered to each scope channel
- Guaranteed dry scopes within 3 hours
- Temperature and humidity monitoring within the cabinet
- Offers full traceability
- Extended storage time (up to 31 days) to cover holiday periods
- Available for up to 10 full size endoscopes



Ease of endoscope placement

EDC RESIDUAL CONTAMINATION RESULTS*

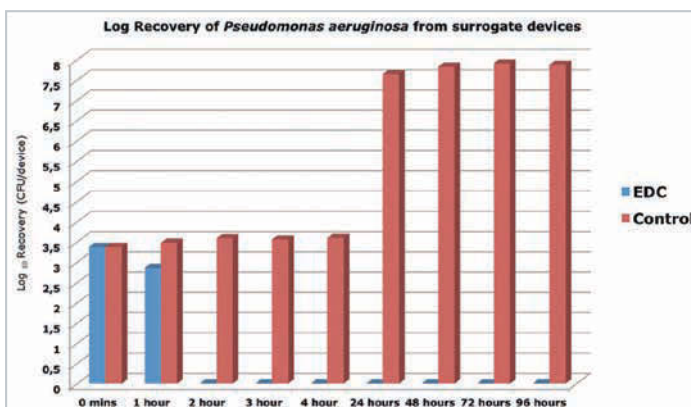

*Data on file.



Large touchscreen for endoscope cycles at a glance



THE COMPLETE CIRCLE OF PROTECTION

As the global vanguard in infection prevention, **only Cantel delivers the Complete Circle of Protection**, a full-value, proactive partnership dedicated to helping you remove risk, streamline operational efficiencies and optimise your success.

ENDOSCOPE DRYING CABINET



DRY & STORE Bacteria pose significant risk to endoscopes during transport and storage. Cantel's transport, drying and storage solutions are designed to protect valuable inventory, reduce cross contamination touchpoints, eliminate moisture in the endoscope channels and control humidity. Humidity or moisture in endoscope channels is known to aid bacterial growth.



Specifications

| | |
|------------------------------------|---|
| Model | EDC10T2 |
| Scope capacity | 10 scopes |
| Independent storage time validated | 31 days |
| Power requirements | 230v 50/60Hz |
| Power consumption data | Normal 2.7A, Max rating 4A |
| Filter condition monitoring | Yes (filter blockage) |
| Airflow monitoring | Airflow to each lumen in every endoscope stored monitored |
| Air changes in cabinet | 95% recirculated |
| Air cleanliness in cabinet | ≤ ISO Class 7 |
| Alarms | Door open alarm |
| Lighting | 1 x low energy 30 watt lamp |
| Noise Level | < 58 dBA |
| Weight | 310kg |

EDC Endoscope Drying Cabinet ordering information

| MODEL | DESCRIPTION | UNITS PER BOX |
|------------|--------------------------|---------------|
| LA-EDC10T2 | Endoscope Drying Cabinet | 1 |
| 750002 | Dri Mats | 20 |
| LA-ESCHA | Colonoscope Hanger | 1 |
| 70201 | Main Override Key | 1 |
| 275016 | Manifold Connector | 1 |
| 795732 | Printer Paper | 20 |
| LA-ASIST1 | Scope Tags | 10 |
| LA-ASGNT3 | Operator Tags | 10 |
| 775018 | Validation Kit | 1 |
| LA-ASGSO | Silicone Oil | 2 |

www.cantelmedical.co.uk

TO PLACE AN ORDER

p: 01702 291878 | e: orders@cantelmedical.co.uk

© 2019 Cantel Medical Corp. ML-EDC-001-UK-03

