

HK-SFP-1.25G Series SFP Module

Features and Functions



- Single Power Supply 3.3V
- Small Form Factor Pluggable (SFP) MSA Compatible
- Single Fiber Bi-Direction LC Connector
- Hot Pluggable Capability
- Compliant With ROHS Standard
- Cost effective SFP solution, enables higher port densities and greater bandwidth
- Support 1.25G Ethernet






Specifications

Item	HK-SFP-1.25G-20-1310		HK-SFP-1.25G-20-1550
Fiber type	SMF, Single fiber, 9/125um		
Connector	LC		
Date Rate	1250 Mbps		
Connector quantity	1		
Distance	0~20km		
Wavelength	Tx1310nm/Rx1550nm		Tx1550nm/Rx1310nm
TX Power	-9~-1dBm		
RX Sens(Max.)	-21dBm		
Operating temperature	0~70°C		
Storage temperature	-40∼85°C		
Relative humidity	30~80%		
Power supply voltage	DC 3.3V		

 $\textbf{Note:} \ \ \mathsf{HK-SFP-1.25G-20-1310} \ \ \mathsf{has} \ \ \mathsf{to} \ \ \mathsf{work} \ \ \mathsf{with} \ \ \mathsf{HK-SFP-1.25G-20-1550} \ \ \mathsf{as} \ \mathsf{a} \ \mathsf{pair}.$


Typical applications

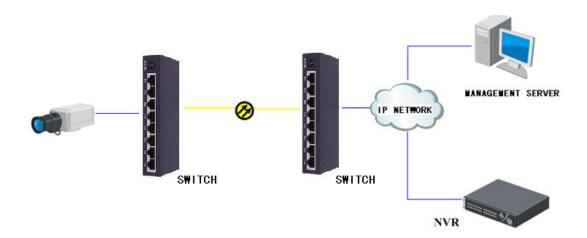




Mechanical (mm)







Distributed by

Headquarters
No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Europe T +31-23-5542770 saleseuro@hikvision.com

Hikvision France T +33(0)1-85-330-444 info.fr@hikvision.com

Hikvision Oceania T +61-2-8599-4233 salesau@hikvision.com

Hikvision Middle East T +971-4-8816086 salesme@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Hong Kong T +852-2151-1761

Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Poland T +48-22-460-01-50 poland@hikvision.com

Hikvision Canada T +1-909-895-0400 sales.usa@hikvision.com **Hikvision India** T +91-22-28469900 sales@pramahikvision.com

Hikvision UK T +44-1628-9021-4 support.uk@hikvision.com