

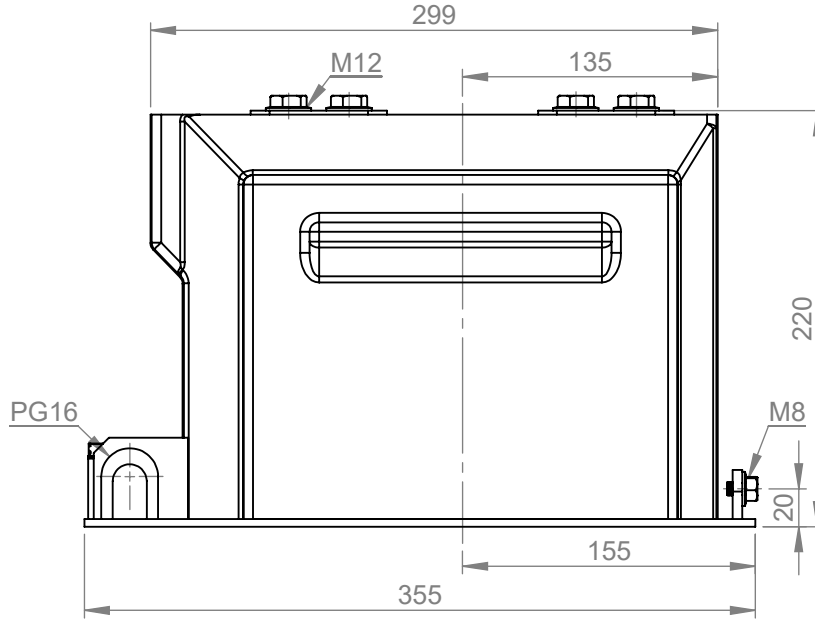
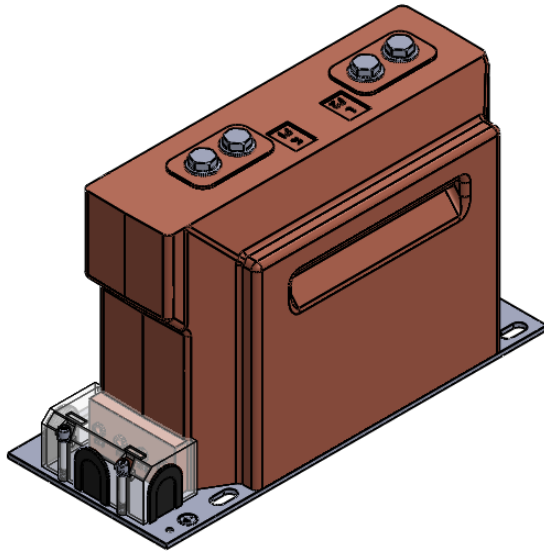

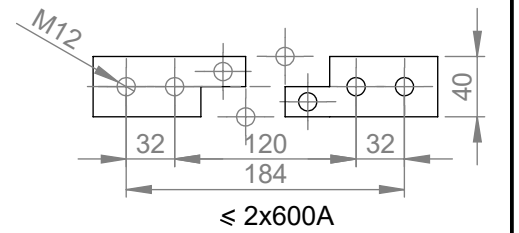
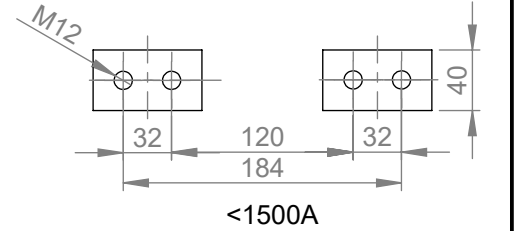
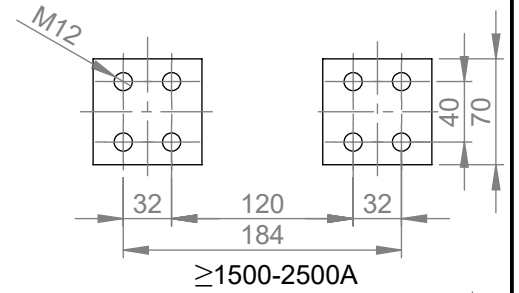


REV 1	M8 earthing termial has been revised.	01/07/2011
REV 2	300mm has been revised as 299mm	31/05/2012
REV 3		

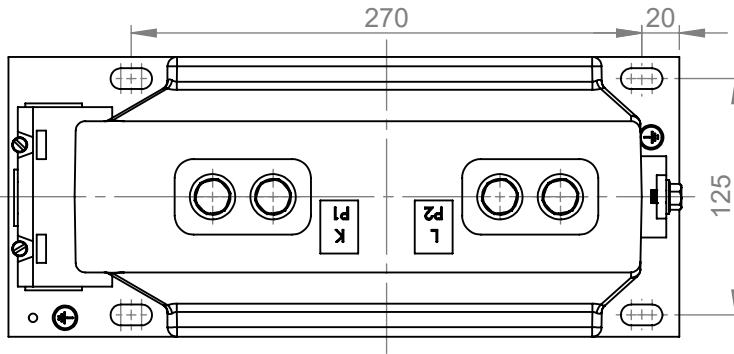

INFORMATION

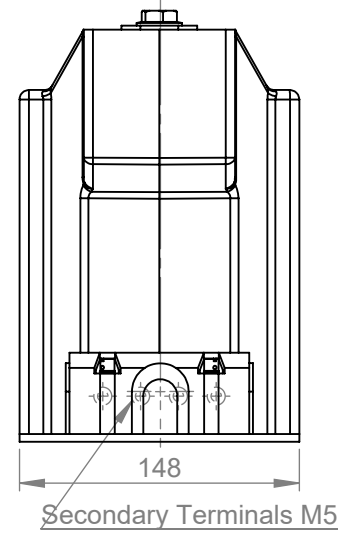

NOTE: All dimensions are in mm.
 Secondary terminals are at P1 (at P2 according to request).
 Small deviations in dimensions and construction possible.

TIGHTENING TORQUE (Nm)	Min.	Max.
M5 (Secondary Terminal)	2.5	3.5
M8 (Ground Terminal)	15	20
M12 (Primary Terminal)	60	70

UNIT	PARTNAME	ITEM	MTRL.DIMEN.	MTRL.COD.	DRAWING NO.	CAST RESIN MTRL.TYPE
REV.	DRW.BY	DATE	NAME	SIGNATURE		
TOLERANCE	CONTROL	DATE	NAME	SIGNATURE		
DIN 7168-g	PREPARED BY	CHECK BY				
SCALE	ATB 10-BS CURRENT TRANSFORMER				RAW.MTRL.CODE	ALT SAC 3713
					SEMI FINISHED MTRL.	
						5150-00