










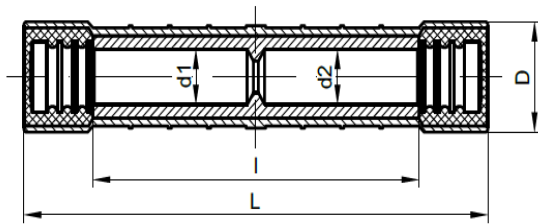












CODE: P8012xx
Item: Preinsulated joint sleeves















PRODUCT TECHNICAL SPECIFICATION















Description: Pre-insulated through connector (sleeve) is designed for connection of aluminum and copper cables intended for connection to distribution network and ABC cables up to 1kV.










No.	Cable cross-section (mm ²)		Code	Type	Dimensions (mm)					Die	Packing				Barcode
					d1	d2	I	L	D		Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
1	10	6	P80-12-01	MJPB 10-6	4,3	2,9	41	70	16	E140	21,90	100	500	11,44	 8605031012866
2	10	10	P80-12-02	MJPB 10-10	4,2	4,2	41	70	16	E140	22,50	100	500	11,74	 8605031012873
3	16	2,5	P80-12-48	MJPB 16-2,5	5,5	2,0	41	70	16	E140	22,30	100	500	11,64	 8605031013337
4	16	4	P80-12-03	MJPB 16-4	5,5	2,6	41	70	16	E140	22,10	100	500	11,54	 8605031012880
5	16	6	P80-12-04	MJPB 16-6	5,5	2,9	41	70	16	E140	21,80	100	500	11,39	 8605031012897
6	16	10	P80-12-05	MJPB 16-10	5,5	4,2	41	70	16	E140	21,70	100	500	11,34	 8605031012903
7	16	16	P80-12-06	MJPB 16-16	5,5	5,5	41	70	16	E140	20,20	100	500	10,59	 8605031012910

No.	Cable cross-section (mm ²)		Code	Type	Dimensions (mm)					Die	Packing				Barcode
					d1	d2	I	L	D		Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
8	25	6	P80-12-24	MJPB 25-6	6,5	2,9	41	70	16	E140	19,90	100	500	10,44	 8605031013092
9	25	10	P80-12-25	MJPB 25-10	6,5	4,2	41	70	16	E140	19,70	100	500	10,34	 8605031013108
10	25	16	P80-12-07	MJPB 25-16	6,5	5,5	41	70	16	E140	19,50	100	500	10,24	 8605031012927
11	25	25	P80-12-08	MJPB 25-25	6,5	6,5	41	70	16	E140	19,20	100	500	10,09	 8605031012934
12	35	6	P80-12-44	MJPB 35-6	8	2,9	41	70	16	E140	18,10	100	500	9,54	 8605031013290
13	35	10	P80-12-45	MJPB 35-10	8	4,2	41	70	16	E140	17,90	100	500	9,44	 8605031013306
14	35	16	P80-12-09	MJPB 35-16	8	5,5	41	70	16	E140	17,60	100	500	9,29	 8605031012941
15	35	25	P80-12-43	MJPB 35-25	8	6,5	41	70	16	E140	17,40	100	500	9,19	 8605031013283
16	35	35	P80-12-10	MJPB 35-35	8	8	41	70	16	E140	17,00	100	500	8,99	 8605031012958
17	16	16	P80-12-26	MJPT 16-16	5,5	5,5	71	103	20	E173	58,50	50	250	15,12	 8605031013115
18	25	16	P80-12-59	MJPT 25-16	6,5	5,5	71	103	20	E173	57,30	50	250	14,82	 8605031037005
19	25	25	P80-12-27	MJPT 25-25	6,5	6,5	71	103	20	E173	56,50	50	250	14,62	 8605031013122
20	35	16	P80-12-60	MJPT 35-16	8	5,5	71	103	20	E173	54,90	50	250	14,22	 8605031037012
21	35	25	P80-12-29	MJPT 35-25	8	6,5	71	103	20	E173	54,50	50	250	14,12	 8605031013146

No.	Cable cross-section (mm ²)		Code	Type	Dimensions (mm)					Die	Packing				Barcode
					d1	d2	I	L	D		Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
22	35	35	P80-12-28	MJPT 35-35	8	8	71	103	20	E173	53,60	50	250	13,89	 8605031013139
23	50	16	P80-12-41	MJPT 50-16	9	5,5	71	103	20	E173	52,80	50	250	13,69	 8605031013269
24	50	25	P80-12-30	MJPT 50-25	9	6,5	71	103	20	E173	52,20	50	250	13,54	 8605031013153
25	50	35	P80-12-31	MJPT 50-35	9	8	71	103	20	E173	50,50	50	250	13,12	 8605031013160
26	50	50	P80-12-11	MJPT 50-50	9	9	71	103	20	E173	49,30	50	250	12,82	 8605031012965
27	54,6	54,6	P80-12-49	MJPT 54,6	10,5	10,5	71	103	20	E173	44,70	50	250	11,67	 8605031034448
28	70	16	P80-12-12	MJPT 70-16	10,5	5,5	71	103	20	E173	44,50	50	250	11,62	 8605031012972
29	70	25	P80-12-32	MJPT 70-25	10,5	6,5	71	103	20	E173	44,10	50	250	11,52	 8605031013177
30	70	35	P80-12-33	MJPT 70-35	10,5	8	71	103	20	E173	43,40	50	250	11,34	 8605031013184
31	70	50	P80-12-34	MJPT 70-50	10,5	9	71	103	20	E173	43,10	50	250	11,27	 8605031013191
32	70	70	P80-12-13	MJPT 70-70	10,5	10,5	71	103	20	E173	42,60	50	250	11,14	 8605031012989
33	95	16	P80-12-61	MJPT 95-16	12,2	5,5	71	103	20	E173	40,90	50	250	10,72	 8605031037029
34	95	25	P80-12-62	MJPT 95-25	12,2	6,5	71	103	20	E173	40,20	50	250	10,54	 8605031037036
35	95	35	P80-12-63	MJPT 95-35	12,2	8	71	103	20	E173	39,80	50	250	10,44	 8605031037043

No.	Cable cross-section (mm ²)		Code	Type	Dimensions (mm)					Die	Packing				Barcode
					d1	d2	I	L	D		Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
36	95	50	P80-12-64	MJPT 95-50	12,2	9	71	103	20	E173	39,60	50	250	10,39	 8605031037050
37	95	70	P80-12-35	MJPT 95-70	12,2	10,5	71	103	20	E173	38,30	50	250	10,07	 8605031013207
38	95	95	P80-12-36	MJPT 95-95	12,2	12,2	71	103	20	E173	37,80	50	250	9,94	 8605031013214
39	35	35	P80-12-46	MJPT 35N	8	8	136	170	20	E173	73,80	25	150	11,94	 8605031013313
40	50	50	P80-12-14	MJPT 50N	10,5	10,5	136	170	20	E173	73,10	25	150	11,46	 8605031012996
41	54	54	P80-12-37	MJPT 54N	10,5	10,5	136	170	20	E173	73,10	25	150	11,46	 8605031013221
42	54,6	54,6	P80-12-42	MJPT 54,6N	67	38	136	170	20	E173	73,10	25	150	11,46	 8605031013276
43	70	50	P80-12-38	MJPT 70N-50N	11,2	10,5	136	170	20	E173	69,80	25	150	10,96	 8605031013238
44	70	54	P80-12-39	MJPT 70N-54N	11,2	10,5	136	170	20	E173	69,80	25	150	10,96	 8605031013245
45	70	70	P80-12-15	MJPT 70N	11,2	11,2	136	170	20	E173	68,70	25	150	17,67	 8605031013009
46	71,5	71,5	P80-12-40	MJPT 71,5N	11,3	11,3	136	170	20	E173	68,70	25	150	10,80	 8605031013252
47	95	95	P80-12-47	MJPT 95N	12,2	12,2	136	170	20	E173	64,30	25	150	10,14	 8605031013320
48	120	50	P80-12-55	MJPT 120-50	14,2	9	93	135	25	E215	80,50	25	150	12,57	 8605031037067
49	120	70	P80-12-56	MJPT 120-70	14,2	10,5	93	135	25	E215	79,70	25	150	12,45	 8605031037074

No.	Cable cross-section (mm ²)		Code	Type	Dimensions (mm)					Die	Packing				Barcode
					d1	d2	I	L	D		Product weight (g)	Bag packing (pcs)	Box packing (pcs)	Box BRUTO weight (kg)	
50	120	95	P80-12-57	MJPT 120-95	14,2	12,2	93	135	25	E215	79,20	25	150	12,37	 8605031037081
51	120	120	P80-12-58	MJPT 120-120	14,2	14,2	93	135	25	E215	78,40	25	150	12,25	 8605031035445
52	150	50	P80-12-51	MJPT 150-50	15,5	9	93	135	25	E215	74,60	25	150	11,68	 8605031037098
53	150	70	P80-12-52	MJPT 150-70	15,5	10,5	93	135	25	E215	73,50	25	150	11,52	 8605031037104
54	150	95	P80-12-53	MJPT 150-95	15,5	12,2	93	135	25	E215	72,80	25	150	11,41	 8605031037111
55	150	120	P80-12-54	MJPT 150-120	15,5	14,2	93	135	25	E215	72,10	25	150	11,31	 8605031037128
56	150	150	P80-12-50	MJPT 150-150	15,5	15,5	93	135	25	E215	71,00	25	150	11,14	 8605031035308

Other characteristics

Body material: Weather and UV resistant Polyamide / Aluminum alloy

Rubber cap: Weather and UV resistant Elastomer

Conductive grease: High conductivity grease

Required tools: Hydraulic or pneumatic press with appropriate inserts (Dies)

Marking: Plamen, cable cross-section, type, die, length of insulation stripping from the conductor, number of pressing, date

Standard: EN 50483-4, NFC 33-021

