


New Edition
Improved hardware
Compact design

- Gold Plated BNC
- Multichannel
- Pre-programmed standards
 pH: 11 preprogrammed + 5 user editable
 Conductivity: 3 preprogrammed + 3 user editable
- No interference between electrodes
- Stability algorithm with intuitive indicator
- Hold function
- Selectable resolution
- Range lock
- Capacitive compensation
- Galvanic isolated USB interface
- High Accuracy
- Free software and firmware updates

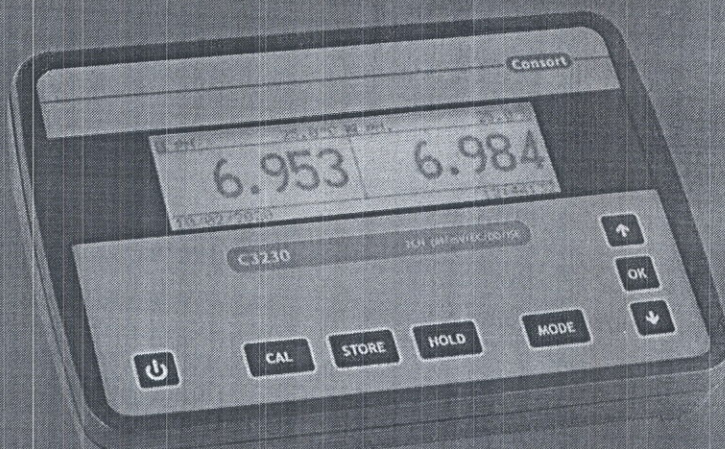

SH300

The C3210 and C3230 are all full-parameter multi-channel instruments. 2 channels with each channel having its own dedicated measurement hardware without interference between the channels. All values can be displayed simultaneously on the screen.

New SZ20T: maintenance free DO probe

Specifications depending on model

Measurement Channels	2
Temperature Channels	2
pH	-2.000...+16.000 pH
mV	±2000.0 mV
Ion	0.01 ng/l...100 g/l (C3230 only)
Conductivity	0...2000 mS/cm
Resistivity	0...200 MΩ.cm
Salinity	0.0...70.0
TDS	0...100.0 g/l
Dissolved oxygen	0...60.00 mg/l 0...600%
Air pressure	600...1300 hPa
Temperature	-5.0...+105.0°C
Warranty	36 months
Made in Belgium	

Code	Description
C3210	2 channel pH/conductivity/DO meter
C3230	2 channel pH/Ion/conductivity/DO meter


Code	Description	Content
C32xxP	pH meter kit, glass electrode	meter + pH electrode SP20T + 2x50ml pH buffers + 50ml electrolyte
C32xxPE	pH meter kit, epoxy electrode	meter + pH electrode SP10T + 2x50ml pH buffers + 50ml electrolyte
C32xxK	EC meter kit, glass electrode	meter + EC electrode SK20T + 50ml EC standard
C32xxKE	EC meter kit, epoxy electrode	meter + EC electrode SK10T + 50ml EC standard
C32xxPK	pH/EC meter kit, glass electrodes	meter + pH electrode SP20T + EC electrode SK20T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard
C32xxPKE	pH/EC meter kit, epoxy electrodes	meter + pH electrode SP10T + EC electrode SK10T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard
C32xxZ	Oxygen meter kit	meter + DO electrode SZ20T
C32xxT	Complete meter kit, glass electrodes (DO epoxy)	meter + pH electrode SP20T + EC electrode SK20T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard
C32xxTE	Complete meter kit, epoxy electrode	meter + pH electrode SP10T + EC electrode SK10T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard
C32xxX	Meter kit without electrodes	meter + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard
SH300	Flexible electrode holder (optional)	

Kits are available for each meter. Replace xx with correct meter number.

● Specifications

pH	Range	-10.000...+20.000 pH
	Resolution	0.001 pH
	Accuracy	0.1% ± 1 digit
	Calibration	1...5 points
	Buffers	11 pre-programmed 5 user specified
	Temperature compensation	-5.0...+105.0°C
	ISO-pH	6.000...8.000 pH
	Slope	80.0...120.0%
	Zero point (Eo)	±999.0 mV
	Selectable Resolution	✓
mV	Range	±2000.0 mV
	Resolution	0.1 mV
	Accuracy	0.1% ± 1 digit
	Calibration	1 point
	Selectable Resolution	✓
CONDUCTIVITY	Range (cc dependent)	0...2000 mS/cm
	Resolution (cc dependent)	0.001 µS/cm
	Accuracy	0.5% f.s. of range
	Calibration	1...3 points
	Standards	3 pre-programmed 3 user specified
	Cell constant (cc)	0.07...13 cm ⁻¹
	Temperature compensation	-5...+105°C or off
	Reference temperature	20°, 25°C
	Temperature coefficient	natural waters (EN27888)
	Range lock	✓
RESISTIVITY	Capacitive compensation	✓
RESISTIVITY	Range	0...200 MΩ.cm
	Resolution	1 Ω.cm
SALINITY	Range	0.0...70.0
	Reference temperature	15°C
TDS	Range	0...100.0 g/l
	Resolution	0.01 mg/l
DISSOLVED OXYGEN	Range	0...60.00mg/l
	Resolution	0.01 mg/l
	Accuracy	1% ± 1 digit
	Calibration	1 point
	Temperature compensation	0...50°C
	Salinity compensation	0...40
	Air pressure compensation	600...1300 hPa
	Selectable Resolution	✓


TEMPERATURE	Range	-30.0...+130.0°C
	Resolution	0.1°C
	Accuracy	0.1°C
	Calibration	1 point
ION (C303x only)	Range	0.01 ng/l...100 g/l
	Resolution	3 digits
	Accuracy	0.5% ± 1 digit
	Calibration	2...5 points + blank
AIR PRESSURE	Range	600...1300 hPa
	Calibration	1 point
CHANNELS	Measurement	2
	Temperature	2
INPUTS	Measurement	2 BNC, 10 ¹² Ω
	Temperature	2x2 banana, for Pt1000
CALIBRATION	Reminder	0...999 h
	GLP	✓
DISPLAY	LCD	240x64 pixels
	White back-light	✓
	Hold function	✓
	Selectable resolution	✓
	Real time clock	✓
	Built-in help	✓
	Languages	English Dutch French German
COMMUNICA-TION	Interface with computer	USB/RS232
	Baud rate	1200...115200 b/s
	Printer	✓
DATA-LOGGING	Data sets	12000 + °C/date/time
	Modes	all
	Manual or timed	✓
	Interval	1...9999 s
SECURITY	Password protection	✓
AMBIENT CONDITIONS	Temperature	0...40°C
	Humidity	0...95%, non condensing
POWER SUPPLY	Mains	100...240 VAC, 50/60 Hz
	Low voltage	9...15 VDC
DIMENSIONS	WxDxH	26x18x9 cm
WEIGHT	Meter	1 kg

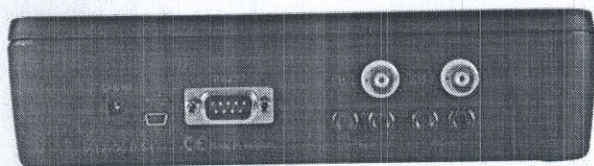

```

***** HELP
F7 = Select display
CAL = Calibrate measurement
      without temperature sensor
CAL = Modify manual temperature
MODE = Settings
HOLD = Hold values
STORE = Send + data log value
  
```

- Gold Plated BNC
- Portable
- One input handles all electrodes
- Pre-programmed standards
pH: 1.68, 2.00, 4.00, 4.01, 6.87, 6.99, 9.18, 9.21, 10.01, 12.00, 12.45 (at 25°C) + 5 user editable
Conductivity: 1413 $\mu\text{S}/\text{cm}$, 12.88 mS/cm , 111.8 mS/cm (at 25°C) + 3 user editable
- Stability algorithm with intuitive indicator
- Hold function
- Selectable resolution
- Range lock
- Capacitive compensation
- Galvanic isolated USB interface
- High Accuracy
- Free software and firmware updates

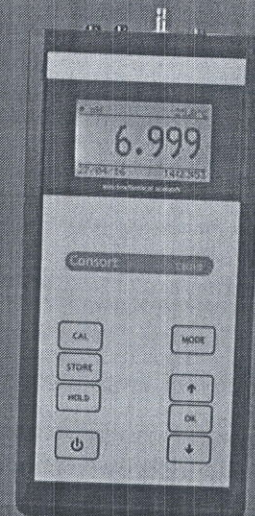

The C6000 series are all full-parameter portable instruments. With the optional CONV_USB D_RS232 it's possible to convert the USB interface to RS232. Suitable for connecting an AP414 printer to the meter.

Specifications depending on model

Measurement Channels	1
Temperature Channels	1
pH	-2.000...+16.000 pH
mV	± 2000.0 mV
Ion	0.01 ng/l... 100 g/l
Conductivity	0...2000 mS/cm
Resistivity	0...200 $\text{M}\Omega\cdot\text{cm}$
Salinity	0.0...70.0
TDS	0...100.0 g/l
Dissolved oxygen	0...60.00 mg/l 0...600%
Air pressure	600...1300 hPa
Temperature	-5.0...+105.0°C
Warranty	36 months
Made in Belgium	

Code	Description
C6010	pH/conductivity/DO meter
C6030	pH/Ion/conductivity/DO meter

Code	Description	Content
C60xxP	pH meter kit, glass electrode	meter + pH electrode SP20T + 2x50ml pH buffers + 50ml electrolyte + carrying case
C60xxPE	pH meter kit, epoxy electrode	meter + pH electrode SP10T + 2x50ml pH buffers + 50ml electrolyte + carrying case
C60xxK	EC meter kit, glass electrode	meter + EC electrode SK20T + 50ml EC standard + carrying case
C60xxKE	EC meter kit, epoxy electrode	meter + EC electrode SK10T + 50ml EC standard + carrying case
C60xxPK	pH/EC meter kit, glass electrodes	meter + pH electrode SP20T + EC electrode SK20T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard + carrying case
C60xxPKE	pH/EC meter kit, epoxy electrodes	meter + pH electrode SP10T + EC electrode SK10T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard + carrying case
C60xxZ	Oxygen meter kit	meter + DO electrode SZ10T + carrying case
C60xxT	Complete meter kit, glass electrodes (DO epoxy)	meter + pH electrode SP20T + EC electrode SK20T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard + DO electrode SZ10T + carrying case
C60xxTE	Complete meter kit, epoxy electrode	meter + pH electrode SP10T + EC electrode SK10T + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard + DO electrode SZ10T + carrying case
C60xxX	Meter kit without electrodes	meter + 2x50ml pH buffers + 50ml electrolyte + 50ml EC standard + carrying case
CONV_USB D_RS232	USB device to RS232 converter	
AP414	Serial printer	
SH300	Flexible electrode holder	

Kits are available for each meter. Replace xx with correct meter number. F.I. C6010P, C6030T, etc...

● Specifications

pH	Range	-2.000...+16.000 pH
	Resolution	0.001 pH
	Accuracy	0.1% ± 1 digit
	Calibration	1...5 points
	Buffers	11 pre-programmed 5 user specified
	Temperature compensation	-5.0...+105.0°C
	ISO-pH	6.000...8.000 pH
	Slope	80.0...120.0%
	Zero point (Eo)	±999.0 mV
	Selectable Resolution	✓
mV	Range	±2000.0 mV
	Resolution	0.1 mV
	Accuracy	0.1% ± 1 digit
	Calibration	1 point
	Selectable Resolution	✓
CONDUCTIVITY	Range (cc dependent)	0...2000 mS/cm
	Resolution (cc dependent)	0.001 µS/cm
	Accuracy	0.5% f.s. of range
	Calibration	1...3 points
	Standards	3 pre-programmed 3 user specified
	Cell constant (cc)	0.07...13 cm ⁻¹
	Temperature compensation	-5...+105°C
	Reference temperature	20°, 25°C or off
	Temperature coefficient	natural waters (EN27888)
	Range lock	✓
	Capacitive compensation	✓
RESISTIVITY	Range	0...200 MΩ.cm
	Resolution	1 Ω.cm
SALINITY	Range	0.0...70.0
	Reference temperature	15°C
TDS	Range	0...100.0 g/l
	Resolution	0.01 mg/l
DISSOLVED OXYGEN	Range	0...60.00mg/l
	Resolution	0.01 mg/l
	Accuracy	1% ± 1 digit
	Calibration	1 point
	Temperature compensation	0...50°C
	Salinity compensation	0...40
	Air pressure compensation	600...1300 hPa
	Selectable Resolution	✓

TEMPERATURE	Range	-5.0...+105.0°C
	Resolution	0.1°C
	Accuracy	0.1°C
	Calibration	1 point
ION (C6030 only)	Range	0.01 ng/l...100 g/l
	Resolution	3 digits
	Accuracy	0.5% ± 1 digit
	Calibration	2...5 points + blank
AIR PRESSURE	Range	600...1300 hPa
	Calibration	1 point
CHANNELS	Measurement	1
	Temperature	1
INPUTS	Measurement	1 BNC, 10 ¹² Ω
	Temperature	1x2 banana, for Pt1000
CALIBRATION	Reminder	0...999 h
	GLP	✓
DISPLAY	LCD	128x64 pixels
	White back-light	✓
	Hold function	✓
	Selectable resolution	✓
	Real time clock	✓
	Built-in help	✓
	Languages	English Dutch French German
COMMUNICA-TION	Interface with computer	USB
	Baud rate	1200...115200 b/s
DATA-LOGGING	Data sets	12000 + °C/date/time
	Modes	all
	Manual or timed	✓
	Interval	1...9999 s
SECURITY	Password protection	✓
AMBIENT CONDITIONS	Temperature	0...40°C
	Humidity	0...95%, non condensing
POWER SUPPLY	Mains	100...240 VAC, 50/60 Hz
	Low voltage	9...15 VDC
	Batteries (included)	4x1.2 V, AA, NIMH
DIMENSIONS	WxDxH	12x25x5 cm
WEIGHT	Meter	600g