


Numărul procedurii de achiziție: **ocds-b3wdp1-MD-1743153665021** din **08.04.2025**

Obiectul de achiziție: **Achiziționarea comutatoarelor**

Denumirea bunurilor / serviciilor	Denumirea modelului bunului / serviciului	Țara de origine	Producătorul	Specificarea tehnică deplină solicitată de către autoritatea contractantă	Specificarea tehnică deplină propusă de către ofertant	Standarde de referință
1	2	3	4	5	6	7
Bunuri/ Servicii:						
Lotul 1						
Comutator gestionat cu 28 porturi inclusiv 4 SFP (Small Form-factor Pluggable)	RG-NBS3100-24GT4SFP-P-V2	China	Ruijie	1/10Gbps SFP+-based ports) - Switching bandwidth: 128 Gbps - Forwarding rate: 95 Mpps - Advanced Layer 2 and basic Layer 3 features - Available PoE power: 195W. Support IEEE 802.3af PoE and IEEE 802.3at PoE+ (up to 30W per port) - Management: RMON, SNMP, TELNET, SSH, Console access - Network Security: Access control list (ACL L2/L3/L4, MAC,IP,Port based); Port security; IP Source Guard; BPDU guard; Storm control - Authentication: MAC/Certificate/Web-based 802.1X authentication, RADIUS server support - Supported protocols: SPAN/RSPAN, UDLD - 802.1Q VLAN, min 4k active VLANs; - Stacking up to 8 members; - IPv4/IPv6 static routes, Routing Information Protocol (RIP), 990 unicast routes, 1024 IPv4/IPv6 ACL - Standards: IEEE 802.1D Spanning Tree Protocol, IEEE 802.1p, IEEE 802.1Q VLAN, IEEE 802.1w, IEEE 802.1X, IEEE 802.3ad, IEEE 802.3af and IEEE 802.3at, IEEE 802.3ah (100BASE-X single/multimode fiber only), IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports, IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab - IP Multicast and IGMP support - Unicast MAC addresses: 16000	Switch-Hub 1Gbit, 28 port (24xPoE+4xSFP), L2 Managed Ruijie RG-NBS3100-24GT4SFP-P-V2 24-Port Gigabit L2 Managed POE Switch, 24 Gigabit RJ45 POE/POE+ Ports, 4 SFP Slots, 370W PoE power budget, 19-inch Rack-mountable Stell Case	

Lotul 2						
Comutator gestionat cu 18 porturi inclusiv 2 SFP (Small Form-factor Pluggable)	RG-ES218GC-P	China	Ruijie	1000BASE-T SFP+-based ports) - Switching bandwidth: 112 Gbps - Forwarding rate: 83 Mpps - Advanced Layer 2 and basic Layer 3 features - Available PoE power: 120W. Support IEEE 802.3af PoE and IEEE 802.3at PoE+ (up to 30W per port) - Management: RMON, SNMP, TELNET, SSH, Console access - Network Security: Access control list (ACL L2/L3/L4, MAC,IP,Port based); Port security; IP Source Guard; BPDU guard; Storm control - Authentication: MAC/Certificate/Web-based 802.1X authentication, RADIUS server support - Supported protocols: SPAN/RSPAN, UDLD - 802.1Q VLAN, min 4k active VLANs; - Stacking up to 8 members; - IPv4/IPv6 static routes, Routing Information Protocol (RIP), 990 unicast routes, 1024 IPv4/IPv6 ACL - Standards: IEEE 802.1D Spanning Tree Protocol, IEEE 802.1p, IEEE 802.1Q VLAN, IEEE 802.1w, IEEE 802.1X, IEEE 802.3ad, IEEE 802.3af and IEEE 802.3at, IEEE 802.3ah (100BASE-X single/multimode fiber only), IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports, IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab - IP Multicast and IGMP support - Unicast MAC addresses: 16000	Switch-Hub 1Gbit, 18 port (16xPoE+2xSFP) Ruijie RG-ES218GC-P 18-Port Gigabit Cloud Managed Smart POE Switch, 16 Gigabit RJ45 Ports including 16 POE/POE+ Ports, 2 SFP Slots, 240W PoE power budget, 13-inch Rack-mountable Steel Case	

Semnat:

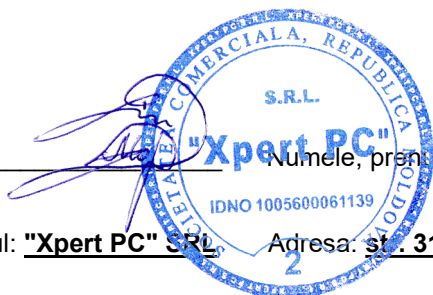

Numele, prenumele: **Martinov Iurie**

În calitate de: **Director comercial**

Ofertantul: **"Xpert PC" S.R.L.** Adresa: **st. 31 August 1989, nr.98**