

VCI (Vehicle Communication Interface)


The VCI (Vehicle Communication Interface) device is used to read the vehicle data and then send it to the tablet via wireless (BT) communication.

OBD II 16pin connector

(For connecting to vehicle's DLC)

Notes:

- It only applies to passenger vehicles with 12V battery voltage.
- Remember to remove the VCI device from the DLC if it is not in use.
- Please re-insert the VCI device into the docking slot on the back of the tablet after use to avoid loss.

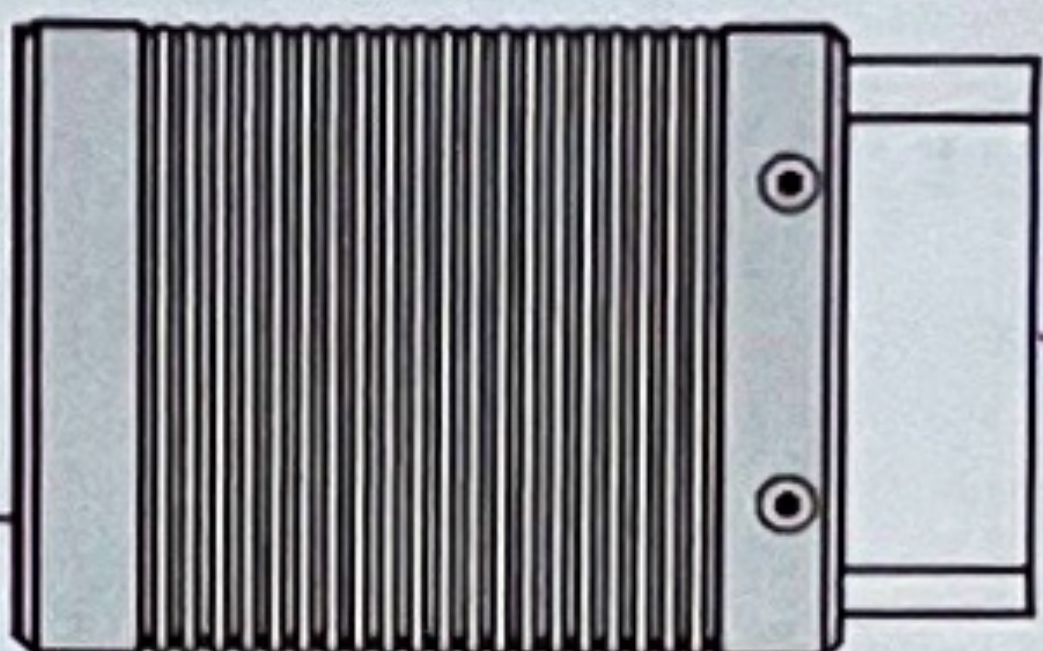

Notes:

- It illuminates RED when the VCI device is plugged into the vehicle's DLC.
- BLUE indicates that the VCI device is working in wireless (BT) communication mode.

Mode Indicator
(See Notes)

How to take out the VCI?
Press the VCI once by hand to release it, it will be automatically ejected from the docking slot.



Install the VCI connector

1. Locate vehicle's DLC socket: The DLC(Data Link Connector) is typically a 16-pin connector where diagnostic code readers interface with the vehicle's on-board computer. It is usually located on driver's side, about 12 inches away from the center of dashboard.
In case no DLC is found, please refer to Automobile Repair Manual.
2. Plug the VCI connector into the vehicle's DLC(It is suggested to use the OBD II extension cable to connect the DLC and the VCI). Normally the power indicator of the VCI will light up.

1 Charging & Turning On

1. Plug one end of the included power adaptor into the USB port of the handset, and then other end into the AC outlet.
2. Once the battery is fully charged, disconnect the power adaptor from the AC outlet.
3. Press the [POWER] button on the handset, the system starts initializing and then enters the home screen.


2 Wi-Fi Setup

1. Tap [Settings] on the desktop and then [WLAN] to configure Wi-Fi setting.
2. Select the desired Wi-Fi connection from the list. (Password may be required for secured networks).
3. When "Connected" appears, it indicates that it is properly connected to the network.

3 Register and Download Software

1. Register (1. Launch App --> 2. Create an App Account --> 3. Activate VCI Connector --> 4. Finish Registration)

1. Launch app: tap on the application icon on the home screen, and then tap on "Login" on the upper right corner of the screen.
 - A. If you are a new user, refer to step 2-4.
 - B. If you have an app account, tap on "Login" to log in the system directly.
 - C. If you forgot the password, tap on "Retrieve password", and then follow on-screen prompt to retrieve it.

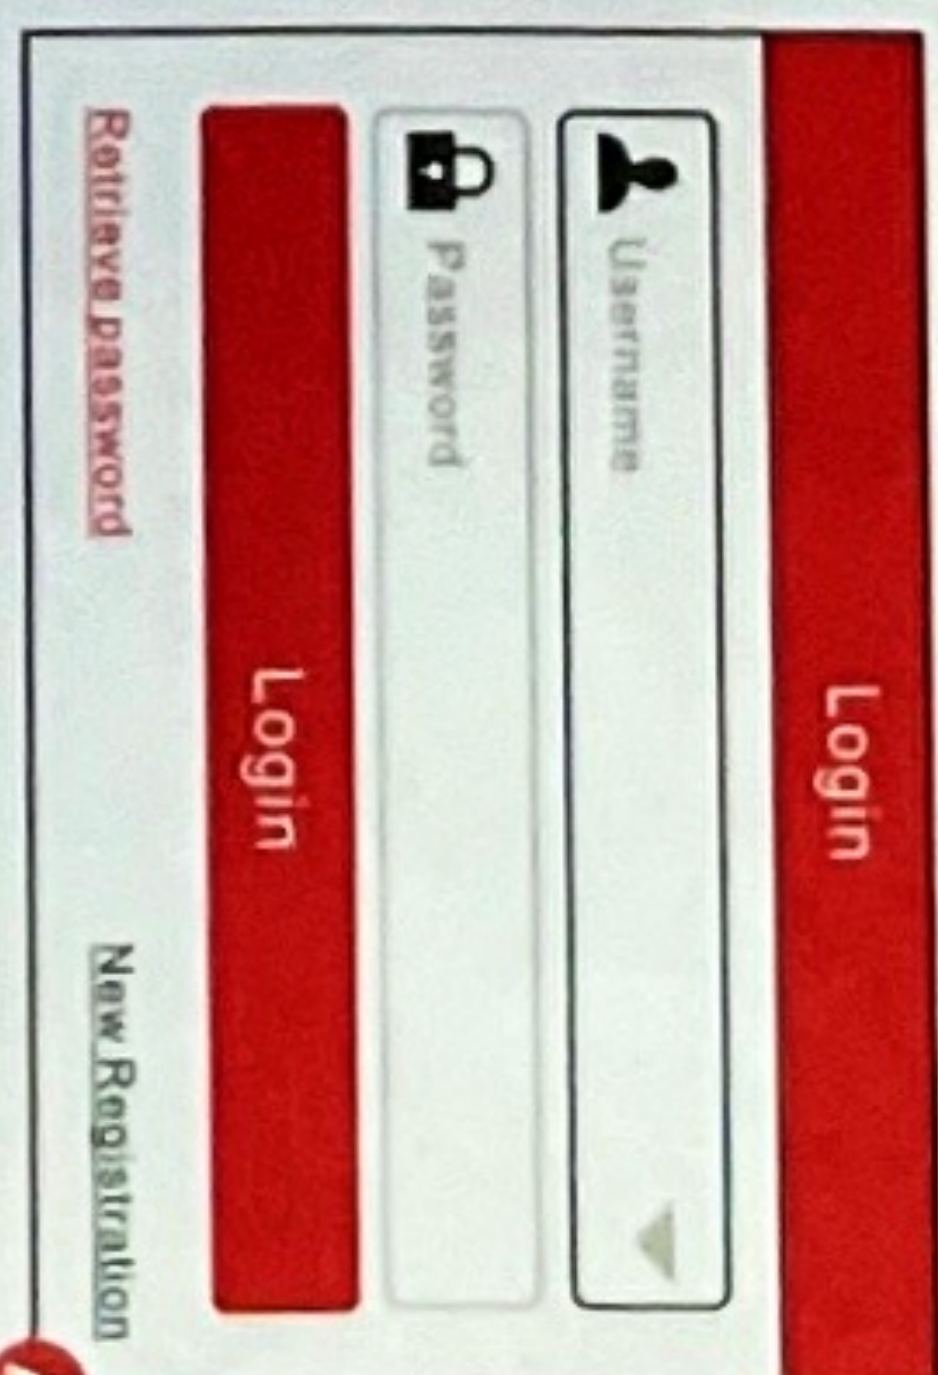

2. Create an App Account: Tap on "New Registration" in Figure A, input the information (items with * must be filled) and then tap on "Register". Refer to Figure B.

Register

1 Create an Account 2 Activate Connector 3 Finish Registration

• Username

• Password

• Confirm Password

• Email

• Select Country

• CAPTCHA

Register

3. Activate VCI Connector: Input the Product S/N and Activation Code (can be obtained from the password envelope), and then tap on "Activate". Refer to Figure C.

Register

1 Create an Account 2 Activate Connector 3 Finish Registration

• Serial Number

• Activation Code

Where is my activation code

Activate

Product S/N

Activation code

Activate

>> Skip

C