
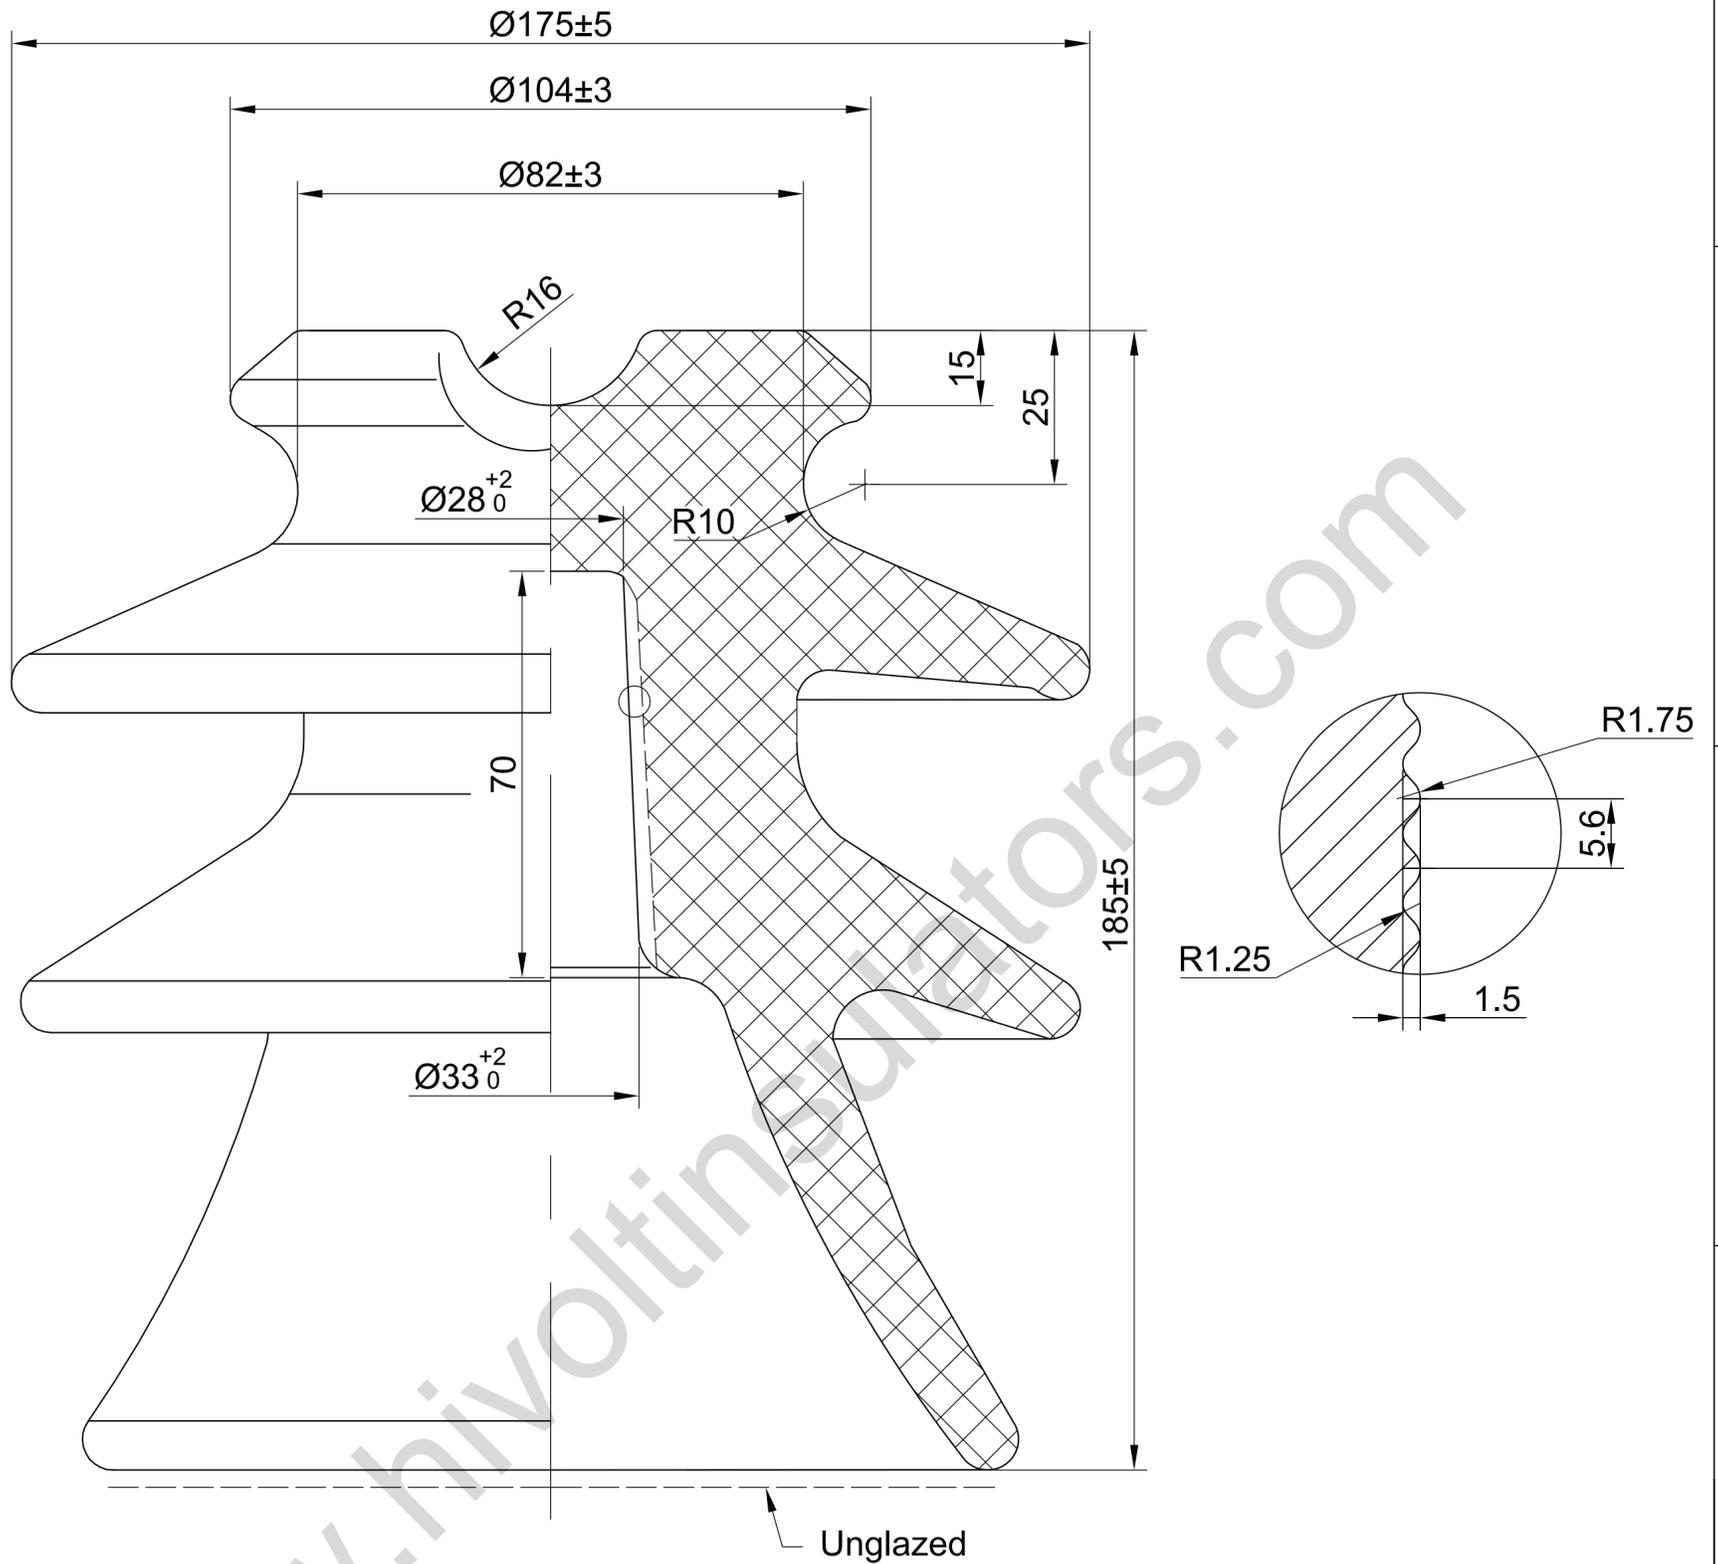


HP037125.1



TECHNICAL SPECIFICATIONS

- | | |
|--|-------|
| 1. Minimum creepage distance | 400mm |
| 2. Lightning impulse withstand voltage | 135kV |
| 3. Power frequency withstand voltage wet | 65kV |
| Power frequency withstand voltage dry | 85kV |
| 4. Cantilever failing load | 13kN |
| 5. Power frequency puncture voltage | 160kV |
| 6. Standard IEC60383-1 | |

Material	Weight		Title	Drawing No.		
Procelain				ShF 20G Pin Insulator	HP037125.1	
	Date	Name	UNIT		SCALE	COLOUR
Drawn	2022-10-26	Wang.G	mm	NTS		
Checked			 DALIAN HIVOLT POWER SYSTEM CO.,LTD.			
Approved						