

VIZULO

MICRO MARTIN Smooth Tool-less Eco
MRUSTE 020 840 L04 AA008 CSN NH1



CE   RoHS

Color

RAL 9006

Electrical

Input power	20 W
Input voltage	220 - 240 V
Frequency	50 - 60 Hz
Power factor	0.99
Inrush current	11 A / 220 μ s

Optical

Optic name	L04
Optic type	TYPE-II
Luminous flux	2627 lm \pm 10%
Luminous efficacy	131 lm/W
Performance temperature Tq	+25 °C
Constant light output	No
Color rendering index	>80
Color temperature	4000 K
Color tolerance	5 SDCM
ULOR	0
LED quantity	8

Lifetime

Lumen depreciation	L90 after 100 000 h
Warranty	5 years
Ambient temperature range	-40 ... +50 °C

Protection

Protection class	Class I
Surge protection L-N	12 kV
Surge protection L/N-PE	12 kV
LED module thermal protection w/ NTC	No
Max products per MCB B16	48
Ingress protection	IP66
Impact resistance	IK08

Housing

Body material	Die-cast aluminium
Cover material	Flat tempered glass
Optic material	PMMA
Color	RAL 9006 (white aluminium)
Dimensions	517 x 170 x 96 mm
Max wind load area SCd	0.04 m ²
Mounting	Post top / side-entry, 60 mm
LED module replaceability	Replaceable by a professional
Driver replaceability	Replaceable by a professional
Accessibility of electronic components	Tool-less


Controls

Dimming	No dimming
----------------	------------

Approvals


CE	Yes
ENEC	Yes
ENEC+	Yes
RoHS	Yes

Light distribution

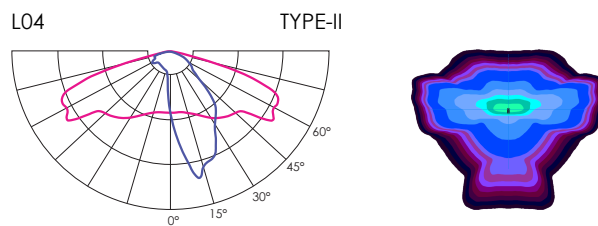

Dimensions

A x B x C (mm): 517 x 170 x 96

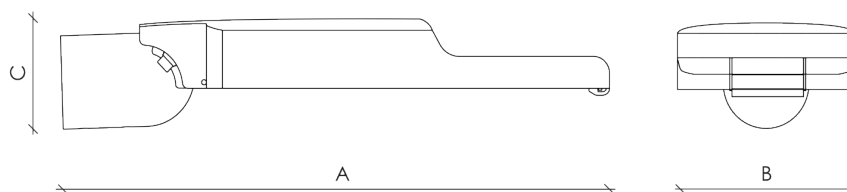

Product images

