

Společnost je zapsána v Obchodním rejstříku vedeném Krajským soudem v Brně oddíl B, vložka 818



PETLAS RUBBER INDUSTRY
AND TRADE COMPANY
Göhlisar Mevkii
40200 Kirsehir
TURKEY

106 R - 0 0 0 2 4 0

Zlín 14th June 2012

Re

Communication concerning the approval and notification of approval number

Enclosed you will find the Communication concerning the approval of your tyres according To ECE Regulation No. **106**

On the base of this approval you are entitled to produce in your factory tyres of the dimension :

12.4-28 PETLAS TA60 8PR 122 A6 TT

with the approval number : **E8 106R-000240**

Sincerely yours



IGTT a.s.
Tyre Approval Department
T. Bati 299, P.O.Box 73
764 22 ZLÍN, Czech Republic
tel: +420577597228,43, fax: +420577597244

Petr Husták, Ph.D.
Tyre Approval Department Head

COMMUNICATION



106R-000240

issued by : Ministry of Transport
L.Svobody 1222/12
110 15 Praha 1
Czech Republic

concerning: ^{1/}


APPROVAL GRANTED
~~APPROVAL EXTENDED~~
~~APPROVAL REFUSED~~
~~APPROVAL WITHDRAWN~~
~~PRODUCTION DEFINITELY DISCONTINUED~~

of a type of pneumatic tyre for agricultural vehicles pursuant to Regulation No. 106

Approval No.: **106R-000240**

Extension No. : **N/A**

1. Manufacturer's name or trade mark (s) of the tyre: **PETLAS TA60**
2. Tyre type designation by the manufacturer: **12.4-28 8PR**
3. Manufacturer's name and address:
**PETLAS RUBBER INDUSTRY
AND TRADE COMPANY
Göhlisar Mevkii
40200 Kirsehir
TURKEY**
4. If applicable, name and address of manufacturer's representative: **N/A**
5. Summarized description:
 - 5.1. Size of tyre: **12.4-28**
 - 5.2. Category of use: **Tractor - Drive wheel - standard tread**
 - 5.3. Structure: **diagonal (bias-ply)/bias belted/radial** ^{1/}
 - 5.4. Speed category symbol: **A6**
 - 5.5. Load-capacity index: **122**
 - 5.5.1. for traction (implement only): **-**
 - 5.5.2. for trailer (implement only): **-**

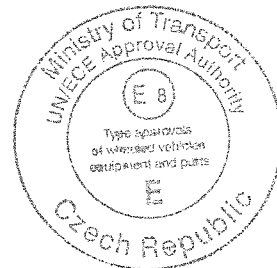

5.6. Whether the tyre is to be fitted with or without an inner tube **TUBE TYPE / TUBELESS**

5.7. The supplementary service description, if applicable: -

6. Technical Service and, where applicable,
test laboratory approved for purposes
of approval or of verification of conformity:

**IGTT a.s.
tř.T. Bati 299
764 22 ZLÍN
CZECH REPUBLIC**

7. Date of report issued by that service:

14.06.2012

8. Number of report issued by that service:

106/0240

9. Reason(s) of extension (if applicable):

-

10. Any remarks:


-

11. Place:

Praha

12. Date:

14.06.2012





13. Signature:

Marek Brázda

14. Annexed to this communication is a list of documents in the approval file deposited at the Administrative Services having delivered the approval and which can be obtained upon request

^{1/} Strike out what does not apply.

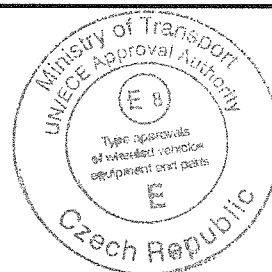

E8 106R-000240		14 -06- 2012	106/0240
Approval No.	Sign	Date	Report No.

Size 12,4-28

Trade name, tyre name PETLAS TA-60
--

Manufacturer: PETLAS, Turkey

TT/TL: **TT** SC: **A6** Date of manufacture: **4011**
LCI: **122** Category of use: **Tractor - Drive wheel - standard tread**

Result of the test

The tyre passed all tests according to ECE No. 106	PASSED
---	---------------

Markings

Sidewall:	PETLAS TA-60 12,4-28 A6 8PR -> DOT 8S 6160 4011 SAFETY WARNING..... MADE IN TURKIYE
------------------	--

	Min.	Measured		Min.	Measured min
Circle	12mm	- mm	Size	9	24 mm
"E"	6mm	- mm	TT, TL, Date, Class.code	4	6 mm
8	4mm	- mm	LCI, SC,	4	6 mm
			Inflation pictogram a,b,c,	2,18,14	- mm

Tyre dimensions measurement

Width	Test rim: W11x28	Test pressure: 230 kPa
	1: 322 mm	2: 322 mm
	3: 323 mm	4: 322 mm
	5: 322 mm	6: 322 mm
		Conditioned 24hours, 20-30°C

Maximum circumference:

Circumference:	4011 mm
----------------	---------

Results

		Prescribed	Measured
Constants:	Over-all width ECE No.106 S	315 mm	323 mm
d= 610 mm	Max.over-all width S+5% = S _{max}	340 mm	
Coefficients "a" and "b"	Outer diameter D	1260 mm	
a= 0,96	Max tyre diameter d+b(D-d) = D _{max}	1306 mm	
b= 1,07	Min tyre diameter d+a(D-d) = D _{min}	1234 mm	1277 mm

Comments	Load index and maximum inflation pressure pictogram are missing. An adjustment is necessary.
-----------------	---



T. Bati 299
764 22 Zlín, CZ

TYRE RESISTANCE TO BURSTING APPROVAL

ECE No.106

E8 106R-000240

Approval No.

106/0240

Report No.

Size

12,4-28

Trade name, tyre name

PETLAS TA-60

Manufacturer: PETLAS, Turkey

TT/TL: **TT** SC: **A6** Date of manufacture: **4011**
LCI: **122** Category of use: **Tractor - Drive wheel - standard tread**

Conditions and test procedure:

Test rim:	W11x28
Pressure specified by manufacturer:	230 kPa
Test pressure = 2,5 times higher (Pmin=600kPa, Pmax=1000 kPa):	600 kPa
Min test duration:	10 min

Comments

The tyre passed the test of resistance to bursting according to ECE No.106.


DRAWING OF THE TYRE SIDEWALL **REGULATION Nr.106**

WITH REFERENCE TO THE EXAMPLE SHOWN
 AT LEFT THE FOLLOWING MARKINGS APPLY
 TO THE TYRE SUBMITTED FOR APPROVAL.
 THE POSITIONING, ORDER AND HEIGHT
 OF THE MARKINGS CONFIRMS TO
 ANNEX 2 AND 3 OF THE REGULATION.

1. TRADE NAME..... : PETLAS
2. TYRE NAME..... : TA60
3. MANUFACTURER'S NAME... : PETLAS
4. COUNTRY OF ORIGIN..... : TURKIYE
5. TYRE SIZE DESIGNATION... : 12.4/11-28
6. A-)LCI-NOMINAL..... : 122
- B-)SUPPLEMENTARY..... : -
7. A-)SPEED CAT.-NOMINAL... : A6
- B-)SUPPLEMENTARY..... : -
8. RADIAL..... : YES- / NO
9. TUBELESS OR TUBETYPE.. : TT
10. REGROOVABLE..... : YES- / NO
11. DATE OF PRODUCTION..... : YES / NO
12. PSI INDEX..... : 33 Psi
13. APPROVAL MARK..... : E8
14. APPROVAL NUMBER..... :

1062-000240

APPROVED BY.....
 DATE.....
 14-06-2012

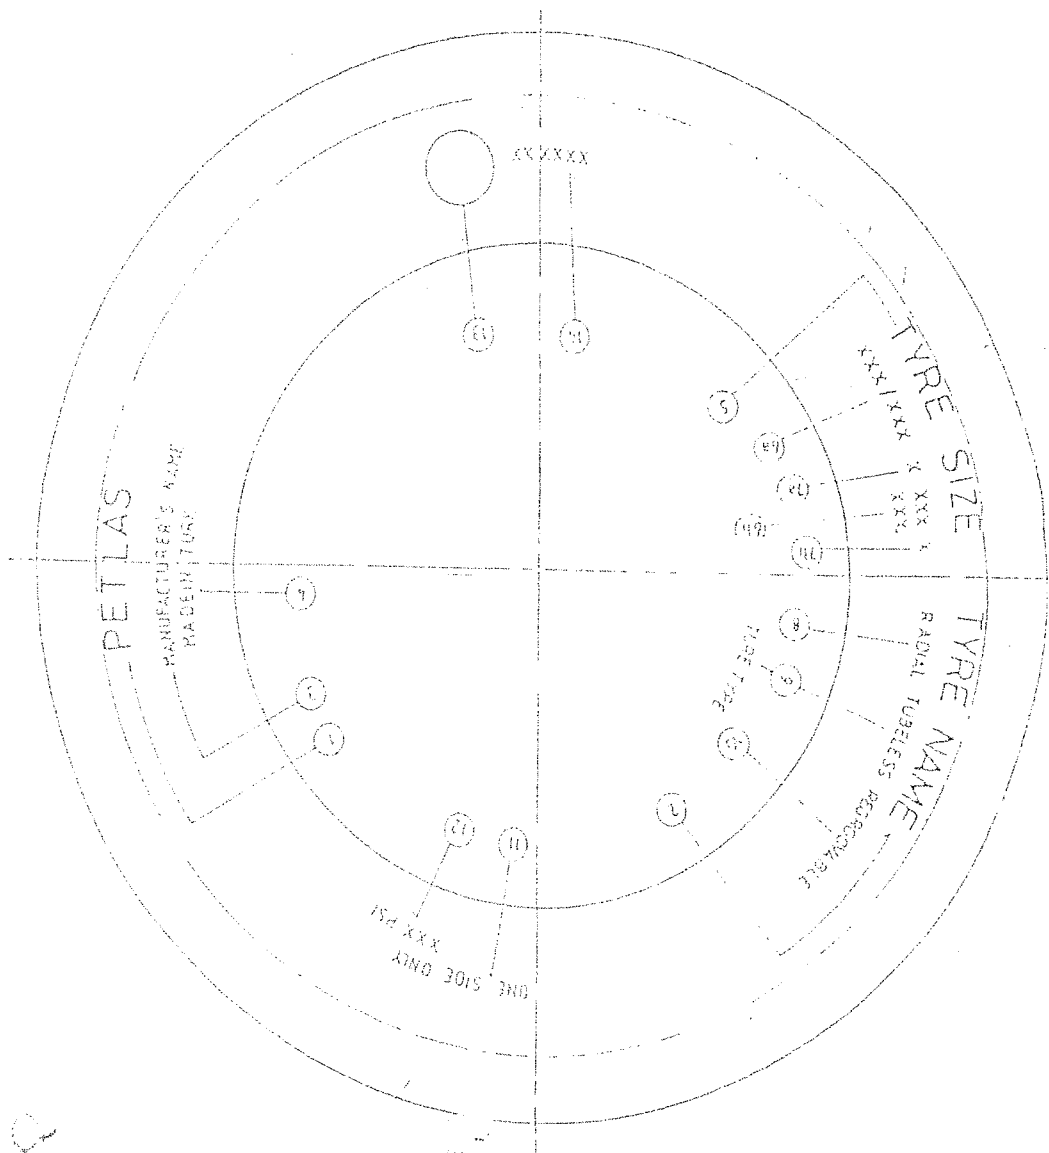


DIMENSIONED DRAWING OF TYRE CROSS-SECTION
REGULATION Nr.106

TRADE NAME..... : PETLAS

TYRE NAME..... : TA60

TYRE SIZE DESIGNATION..... : 12.4/11-28

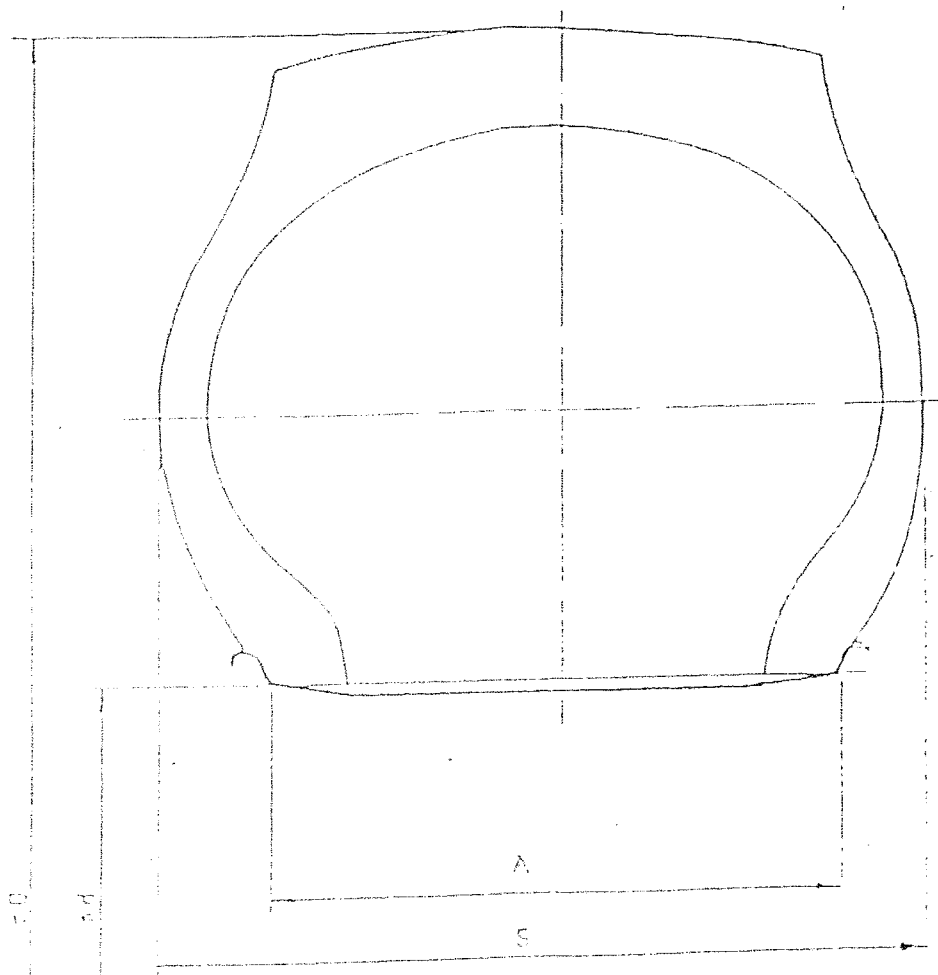

TYRE DIMENSIONS.. :

S = 315 mm

D (Φ)= 1260 mm

A = 279,4 mm

d (Φ)= 716 mm

APPROVED BY..... :

DATE..... : 14-06-2012


APPROVAL NUMBER.. : E8 106R 000240

DRAWING OF THE TYRE TREAD
REGULATION Nr.106

TRADE NAME..... : PETLAS

TYRE..... : TA60

TYRE SIZE DESIGNATION.. : 12.4/11-28

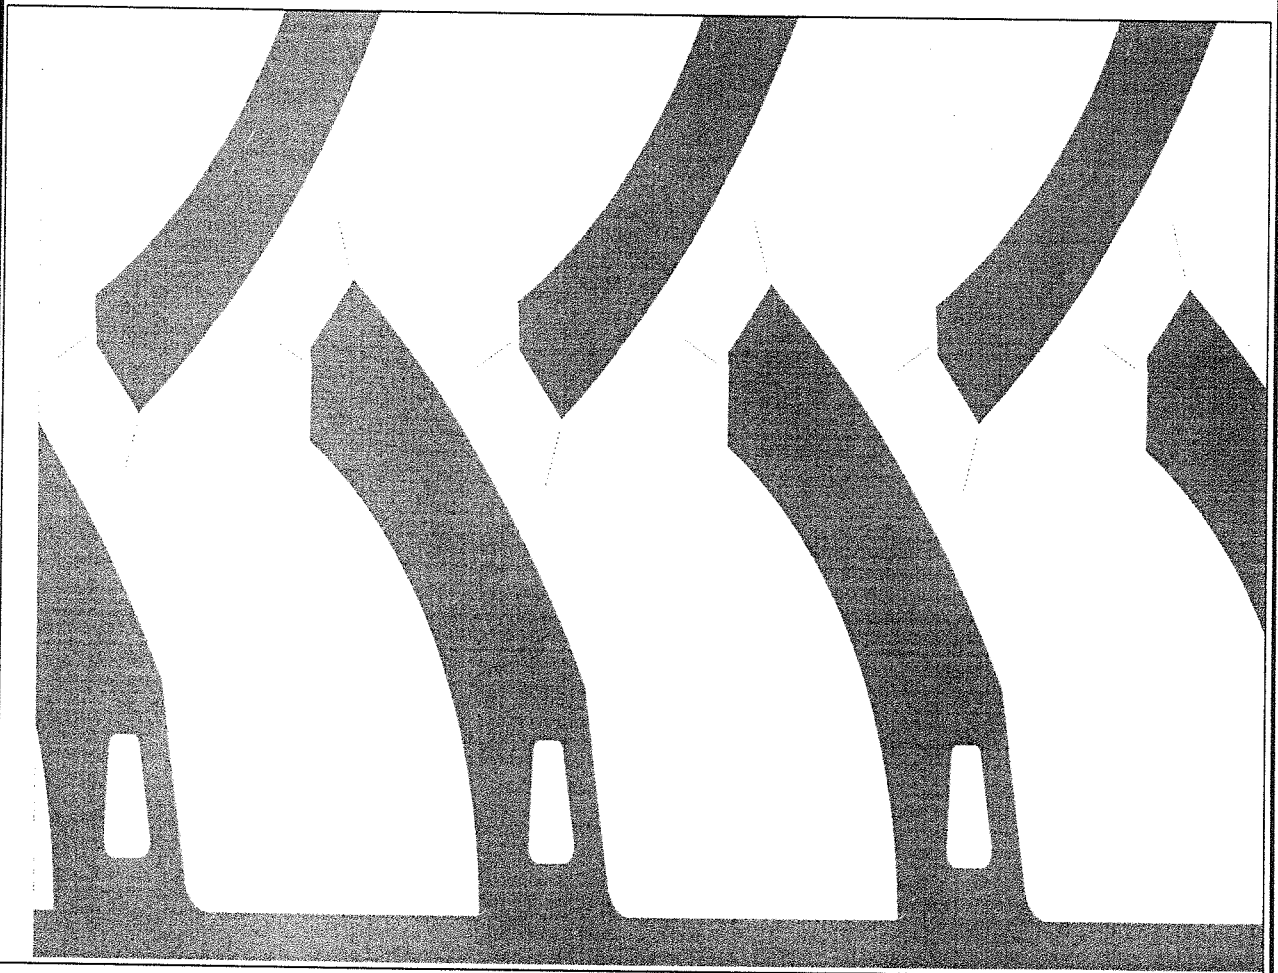

APPROVED BY..... :

DATE..... :

APPROVAL NUMBER..... :

[Signature]
14-06-2012

E8 106R 000240