
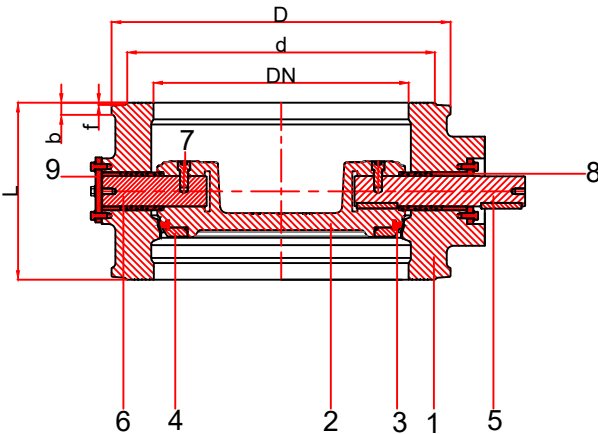


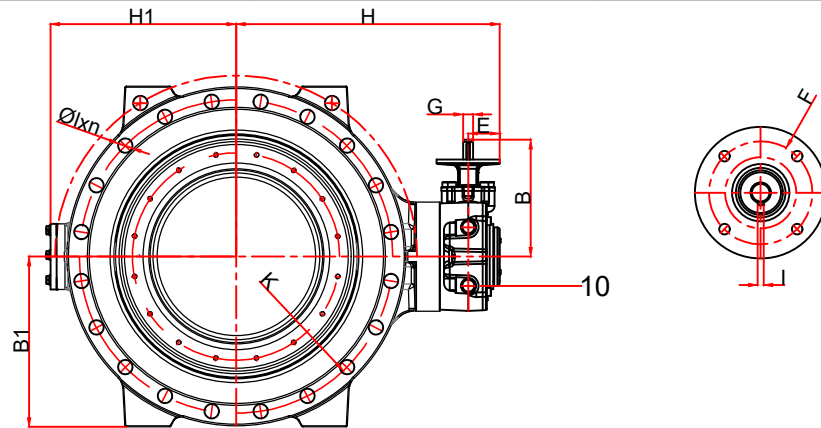

B		A	
PRODUCTION STANDARTS			
DESIGN		EN593	
END CONNECTION		FLANGED EN 1092-2/ ISO 7005-2	
FACE TO FACE		EN558 / DIN3202 F4	
MARKING		EN19	
PRESSURE RATING		PN16	
TEST		EN 12266-1	
VALVE PRESSURE TEST			
SHELL STRENGTH		SHELL TIGHTNESS	SEAT TIGHTNESS
24Bar		18Bar	18Bar

DIMENSIONS																
DN (mm)	d	D	f	b	L	K	B1	H1	H	G	E	B	FLANGE TYPE	F	I	ØXn
100	156	220	3	19	190	180	110	113	224	20	48,6	162	F10	102	6	19X8
125	184	250	3	19	200	210	125	125,5	237	20	48,6	162	F10	102	6	19X8
150	211	285	3	19	210	240	145	143	256	20	48,6	162	F10	102	6	23X8
200	266	340	4	20	230	295	172	180	306	20	48,6	162	F10	102	6	23X12
250	319	400	4	22	250	355	205	210	321	20	48,6	162	F10	102	6	28X12
300	370	455	4	24,5	270	410	232,5	234,5	367	20	48,6	174	F10	102	6	28X12
350	429	520	4	26,5	290	470	264	270	391	20	48,2	191	F10	102	6	28X16
400	480	580	4	28	310	525	292	300	445,5	20	62,5	230	F10	102	6	31X16
450	548	640	4	30	330	585	322	330	470,5	20	62,5	230	F10	102	6	31X20
500	609	715	4	31,5	350	650	359,5	367	521,5	20	62,5	231	F10	102	6	34X20
600	720	840	5	36	390	770	422	429	586	20	65	329,5	F10	102	6	37X20
700	794	910	5	39,5	430	840	457	465	655	20	65	354	F10	102	6	37X24
800	901	1025	5	43	470	950	517,5	535	720	20	65	354	F10	102	6	41X24
900	1001	1125	5	46,5	510	1050	568	595	802,5	29,85	87,5	399,5	F14	140	8	41X28
1000	1112	1255	5	50	550	1170	630	650	914	20	139	454	F12	125	6	44X28
1200	1328	1485	5	57	630	1390	747,5	785	1093,5	29,85	157,5	546,5	F10	102	8	50X32
1400	1530	1685	5	60	710	1590	842	905	1279,5	29,85	207	624	F10	102	8	50X36
1600	1750	1930	5	65	790	1820	975	977	1475,5	29,85	207,5	666	F10	102	8	57X40