

**Anexa 41 Lampa cu Fanta, Model: TSL-900Z, SHANGHAI MEDIWORKS****PRECISION INSTRUMENTS CO., LTD./ Tomey****Nr. de inregistrare AMDM: DM000739305**

Specificarea tehnică deplină solicitată, Standarde de referință	Specificarea tehnică deplină oferita, Standarde de referință
Lampă cu fantă Cod 170100 Descriere Microscop binocular care permite examinarea stereoscopică detaliată a structurilor oculare. Parametrul Specificația Sistemul de iluminare Lățimea fantei,mm 0-10 minimum, ajustabilă Lungimea fantei, mm 0-10 minimum, ajustabilă Rotirea, grade 0-90 Filtre Minim: albastru, verde, absorbție de căldură Microscopul Tipul Binocular Mărire totală 10x minimum Metoda de schimbare a măririi Să se indice Gama de reglare a dioptriei, dioptrii de la -7 la +7 minim Gama de mișcare:  Deplasare laterală, mm $\geq 100$ Deplasare în adâncime, mm $\geq 100$ Deplasare în înălțime, mm $\geq 30$ Reglare fină de la joystick, mm $\geq \pm 10$ Reglarea înălțimii bărbiei, mm $\geq 70$ Alimentarea, 220 V, 50 Hz Obligatoriu Accesorii Setul standard Bec min. 2 buc	Lampă cu fantă Cod 170100 Descriere Microscop binocular care permite examinarea stereoscopică detaliată a structurilor oculare. Parametrul Specificația Sistemul de iluminare Lățimea fantei,mm 0-14 ajustabilă- broșura, pag 4 Lungimea fantei, mm 1-14 , ajustabilă broșura, pag 4 Rotirea, grade 0-180 - broșura, pag 4 Filtre: galben, verde (red-free) albastru, absorbție de căldură - broșura, pag 4 Microscopul Tipul Binocular - broșura, pag 4; Mărire totală 12.5x - broșura, pag 4 Metoda de schimbare a măririi in 5 trepte:6x;10x;16x; 25x; 40x - broșura, pag 4 Gama de reglare a dioptriei, dioptrii de la -8 la +8 - broșura, pag 4; Gama de mișcare : Deplasare laterală, mm =115, broșura, pag 4; Deplasare în adâncime, mm =110, broșura, pag 4 Deplasare în înălțime, mm =30, broșura, pag 4 Reglare fină de la joystick, mm =12 broșura, pag 4 si pag 1 (poza) Reglarea înălțimii bărbiei, mm = 80 Alimentarea, 120-240 V, 50/60 Hz Obligatoriu Accesorii Setul standard Bec - 2 buc

# SLIT LAMPS TSL-900 SERIES

## LED Slit Lamps



TSL-900H

TSL-900Hdigital

TSL-900Z

**With the TSL-900 series you'll get the ideal value for your money: high-performance and affordable for everyone.**

The excellent quality of the HD optical system and the option to choose a digital imaging system will enable precise observation of the patient's eye. For reliable results and the added value of patient education.



# SLIT LAMPS TSL-900 SERIES

Quality in detail

## MAIN FEATURES AT A GLANCE

### Illumination system

- Inclined (HS-type only)
- Long-life economical LED lamp
- High illumination intensity
- Natural colour temperature
- Optimal observation and analysis of cornea and retina

### HD optical system with 5-step magnification

- Resolution up to 200 lp/mm (2,700 N lp/mm)
- Magnification 6×, 10×, 16×, 25×, 40×
- View every detail of all the various structures

### All-encompassing filter range

- Including built-in yellow filter
- Red-free, neutral density, blue, IR heat-absorbing filter
- Diffuser



TSL-900H(digital)



TSL-900Z



### Metal Plate Table Kit

- For fast and easy table mounting
- Perfect fit

## OPTIONAL EQUIPMENT

### TAT-80R Applanation Tonometer

- Gold standard in IOP measurement
- Best reproducibility and accuracy
- Reliable and durable



### Measuring eyepiece

- With a reticle inside
- Convenient measurement of pathologies
- For more accurate diagnosis



## **GET YOUR DIGITAL SLIT LAMP**

- TSL-900Hdigital as a complete solution
- Upgrade kit for TSL-900Z and TSL-900H

### **Digital imaging system includes**


- Digital camera system
- Beam-splitter
- USB cable
- Eyeview software
- Compatible with Windows OS
- IR Background illumination module for Meibomian glands observation (TSL-900H/TSL-900Hdigital)

### **Performance**

- Wide dynamic range
- Meibomian glands examination
- Auto exposure
- Auto gain
- Auto white balance
- Auto OD/OS indicator

### **Software features**

- Easy patient management
- Functional analysis of images and videos
- Comparison of several images at one time
- Customisation based on individual needs

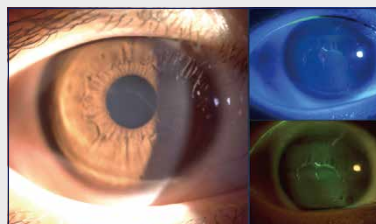

### **CAMERA SYSTEM** (TSL-900Z + digital upgrade kit/TSL-900Hdigital)

Resolution	5 MP/2592 × 1944
Connectivity	USB 3.0
Photo format	JPEG
Video format	MP4 H.264
Chip size	1/1.8"
Frame rate	25 fps

# SLIT LAMPS TSL-900 SERIES

## Specifications

	TSL-900Z / TSL-900Z + digital upgrade kit	TSL-900H / TSL-900Hdigital
<b>OPTICAL SYSTEM</b>		
Type	Galilean converging binoculars 10°	Galilean converging binoculars 10°
Magnification	5-step rotating drum change 6×, 10×, 16×, 25×, 40×	5-step rotating drum change 6×, 10×, 16×, 25×, 40×
Eyepiece	12.5×	12.5×
Field of view	36.2, 22.3, 14, 8.9, 5.7 mm	36.2, 22.3, 14, 8.9, 5.7 mm
Interpupillary distance	52 to 80 mm	52 to 80 mm
Dioptre adjustment	-8 D to +8 D	-8 D to +8 D
<b>SLIT PROJECTION AND BASE</b>		
Slit width	0-14 mm continuously variable	0-14 mm continuously variable
Slit length	1-14 mm continuously variable	1-14 mm continuously variable
Aperture diameters	0.2, 3.5, 8, 14 mm	0.2, 1, 2, 3, 5, 10, 14 mm
Filters	Yellow, red-free, neutral density, blue, IR heat-absorbing filter, diffuser	Yellow, red-free, neutral density, blue, IR heat-absorbing filter, diffuser
Slit angle	0° to 180°	0° to 180°
Slit inclination	n.a.	5°, 10°, 15°, 20°
Base travel	30 mm Z-axis, 115 mm X-axis, 110 mm Y-axis	30 mm Z-axis, 115 mm X-axis, 110 mm Y-axis
Chin rest vertical movement	80 mm	80 mm
Horizontal fine adjustment	12 mm	12 mm
Fixation lamp	Red LED	Red LED
Light source	White LED	White LED
Luminance	≥150 klx	≥150 klx
<b>DIMENSIONS AND WEIGHT</b>		
Dimensions WDH	330 × 390-460 × 460 mm	330 × 390-460 × 650 mm
Weight	16 kg	17 kg
<b>POWER SUPPLY</b>		
Power supply input	100 – 240 V, 50/60 Hz	100 – 240 V, 50/60 Hz
Power supply output	12 – 15 V DC	12 – 15 V DC



**TOMEY EUROPE**  
**TOMEY GmbH**  
 Wiesbadener Strasse 21  
 90427 Nürnberg, Germany  
 Phone +49 911 938 546 2 0  
 Fax +49 911 938 546 2 20  
 Email info@tomey.de

**TOMEY ASIA-PACIFIC**  
**TOMEY CORPORATION JAPAN**  
 2-11-33 Noritakeshinmachi  
 Nishi-ku, Nagoya 451-0051, Japan  
 Phone +81 52 581 5327  
 Fax +81 52 561 4735  
 Email intl@tomey.co.jp



www.tomey.de